International Journal of Microwave and Wireless Technologies

cambridge.org/mrf

Co-channel interference analysis at faulty K band waveguide joints

Neelam Sharma and Debendra Kumar Panda

Department of Electronics Engineering, Medicaps University Indore, M.P. 453331, India

Abstract

Channel interference is a significant issue for many applications such as satellite communication, mobile communication, and RADAR communication. This paper presents co-channel interference analysis at faulty K band waveguide joints using the multi-cavity modeling technique. Numerical data obtained from multi-cavity modeling technique analysis has been compared with CST microwave studio simulated data and verified with measured data.

Research Paper

Cite this article: Sharma N, Panda DK (2023). Co-channel interference analysis at faulty K band waveguide joints. *International Journal of Microwave and Wireless Technologies* **15**, 198–203. https://doi.org/10.1017/S1759078722000423

Received: 9 November 2021
Revised: 5 March 2022
Accepted: 7 March 2022
First published online: 30 March 2022

Key words:
Channel interference; MCMT; waveguide joint

Author for correspondence:
Neelam Sharma,
E-mail: neelam2407sharma@gmail.com

Introduction

Rectangular and circular waveguides have been used since World War II and are still used. These waveguide-based elements have wide applications in various frequency bands ranging from 1 to 1000 GHz. Phased array antennas are used in RADAR, satellite communication, broadcasting, space probe communication, weather research, human-machine interface, 5G and Wi-Fi. Multiport power dividers or combiners are used as a feeding network for phased array antennas. As multiple input multiple output techniques are used in many applications, channel interference has become a significant issue.

A literature survey on channel interference reveals that many authors have described it in coaxial cables, microstrip lines and optical fiber cables [1–3]. Coupling of power at waveguide joint has been analyzed for X-band and Ku-band only [4–6]. Many research studies are going on longitudinal waveguides for high power transmission and radiation. For high-frequency applications, it is necessary to use a waveguide-based component. When a two-dimensional array with a power divider through flange is joined, there may be a gap due to faulty workmanship. This gap is unwanted, may cause coupling of power to an adjacent channel. So, at higher frequency bands, channel interference should be analyzed.

An excellent technique for the analysis of waveguide-based components is multi cavity modeling technique (MCMT). It was proposed by Vengadarajan [7]. This technique analyzes slot antenna, open-ended waveguide, to estimate EMC/EMI at faulty joint and directional coupler. Further, E-plane Tee, H-plane Tee, power dividers and combiners have been analyzed using the multi-cavity modeling technique by Das, Chakraborty and Panda [8–12]. More work has been done to analyze waveguide-based networks for high frequency [13].

This paper presents the analysis of coupling at E-plane waveguide joints using the multi-cavity modeling technique. Generally, in this technique, the equivalent magnetic current density replaces all the opening and gaps of the waveguide structure. So it becomes easy to analyze the structure using magnetic field integral equation (MFIE). Here four waveguides are used to model this structure, and the gap is considered as a cavity. Further, the tangential component of the magnetic field scattered inside the waveguide and cavities are determined using the procedure outlined in [12], and the continuity of the tangential component of the magnetic field at coupling aperture is also considered. Now to solve for the electric field at the window aperture, the method of the moment is used. By using basis functions, this method converts all the integral equations into matrix equations. By knowing the aperture fields, reflection and transmission coefficients are being estimated. As coupling regions are of arbitrary dimension, the cross-polarization component has been considered in the analysis. Other higher bands can also be analyzed using MCMT.

Theory

At the beginning for the analysis of co-channel interference, a theoretical model has been prepared using two-channel E-plane waveguides, shown in Fig. 1. The CST simulated three-dimensional view is shown in Fig. 2. It shows that the structure has four waveguide regions wvg-1 to wvg-4 and one cavity gap. It also has four interfacing apertures (A_1-A_4).

When the structure is fed at its input port, field distribution is established on the apertures. The equivalent magnetic current densities replace the interfacing apertures between different regions. There are four magnetic current densities M_1 to M_4 as per four apertures A_1 to A_4 [14]. These are considered sources and can be obtained by modal expansion method for waveguide regions (Wvg-1 to Wvg-4) and using cavity Green's function for cavity region. By

© The Author(s), 2022. Published by Cambridge University Press in association with the European Microwave Association

CAMBRIDGE UNIVERSITY PRESS

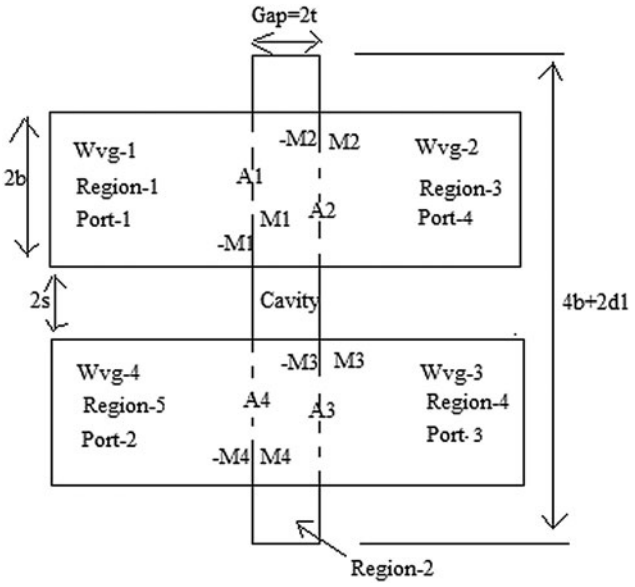


Fig. 1. E-plane two-channel waveguide joint in terms of cavity, waveguides, different regions, and magnetic current at the apertures.

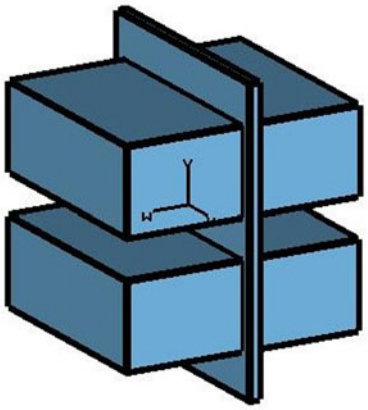


Fig. 2. CST simulated a 3D view of two-channel E-plane waveguides with a gap.

applying the continuity of the tangential component of the magnetic field across the apertures, boundary conditions can be found between different regions as given in [6].

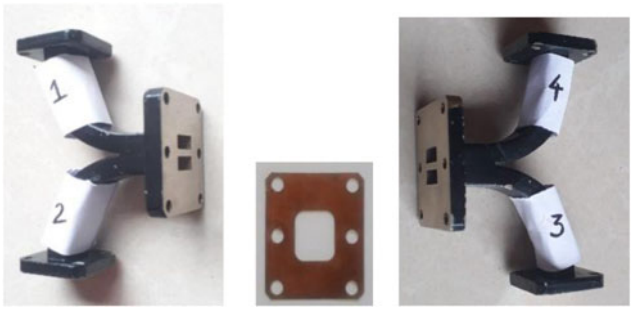


Fig. 3. Image of two-channel E-plane waveguide bends and a copper plate.

Table 1. Different dimensions of the gap for measurement.

Structure no.		d (mm)	d 1 (mm)	2t (mm)
K band	1.	0.66	3.184	0.3
	2.	0.166	2.182	0.5
	3.	0.6	6.18	0.3

Fields are represented over Y-Z plane. Here Y-component of the incident magnetic field at the aperture is a dominant TE_{10} mode and is given by

$$H_Y^{in} = -Y_0 \cos\left(\frac{\pi y}{2a_i}\right) e^{-j\beta x}$$

As electric field distributions are unknown, but can be expressed as a weighted sum of sinusoidal basis functions, which can be given as

$$e_p^{i,z} = \begin{cases} \sin\left\{\frac{p\pi}{2L}(y - y_w + L)\right\} & \text{for } y_w - L \le y \le y_w + L, \\ & z_w - W \le z \le z_w + W \\ 0 & \text{elsewhere} \end{cases} \quad (1)$$

Here $E_p^{i,y/Z}$ are the unknown weights and $e_p^{i,y/z}$ are the sinusoidal basis function which is given by:

$$e_p^{i,z} = \begin{cases} \sin\left\{\frac{p\pi}{2L}(y - y_w + L)\right\} & \text{for } y_w - L \le y \le y_w + L, \\ & z_w - W \le z \le z_w + W \\ 0 & \text{elsewhere} \end{cases} \quad (2a)$$

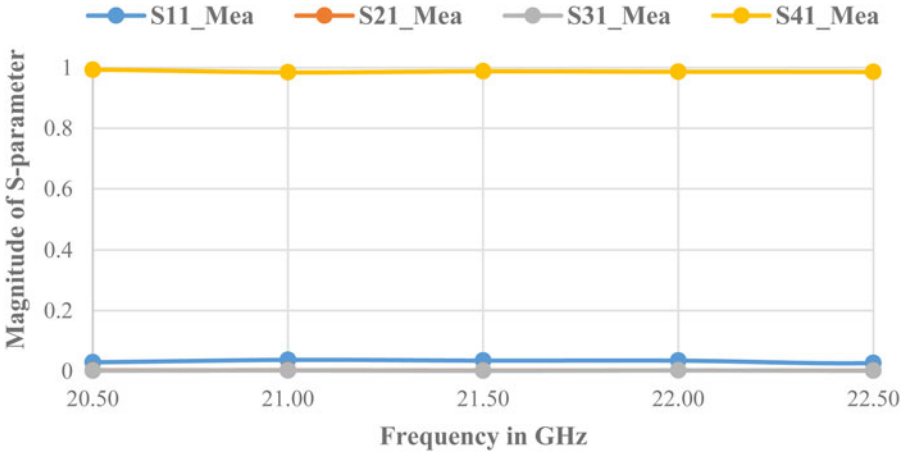


Fig. 4. Graph of measured S-parameters for E-plane WR-42 waveguide two-channel joints for K-band without a gap.

https://doi.org/10.1017/S1759078722000423 Published online by Cambridge University Press



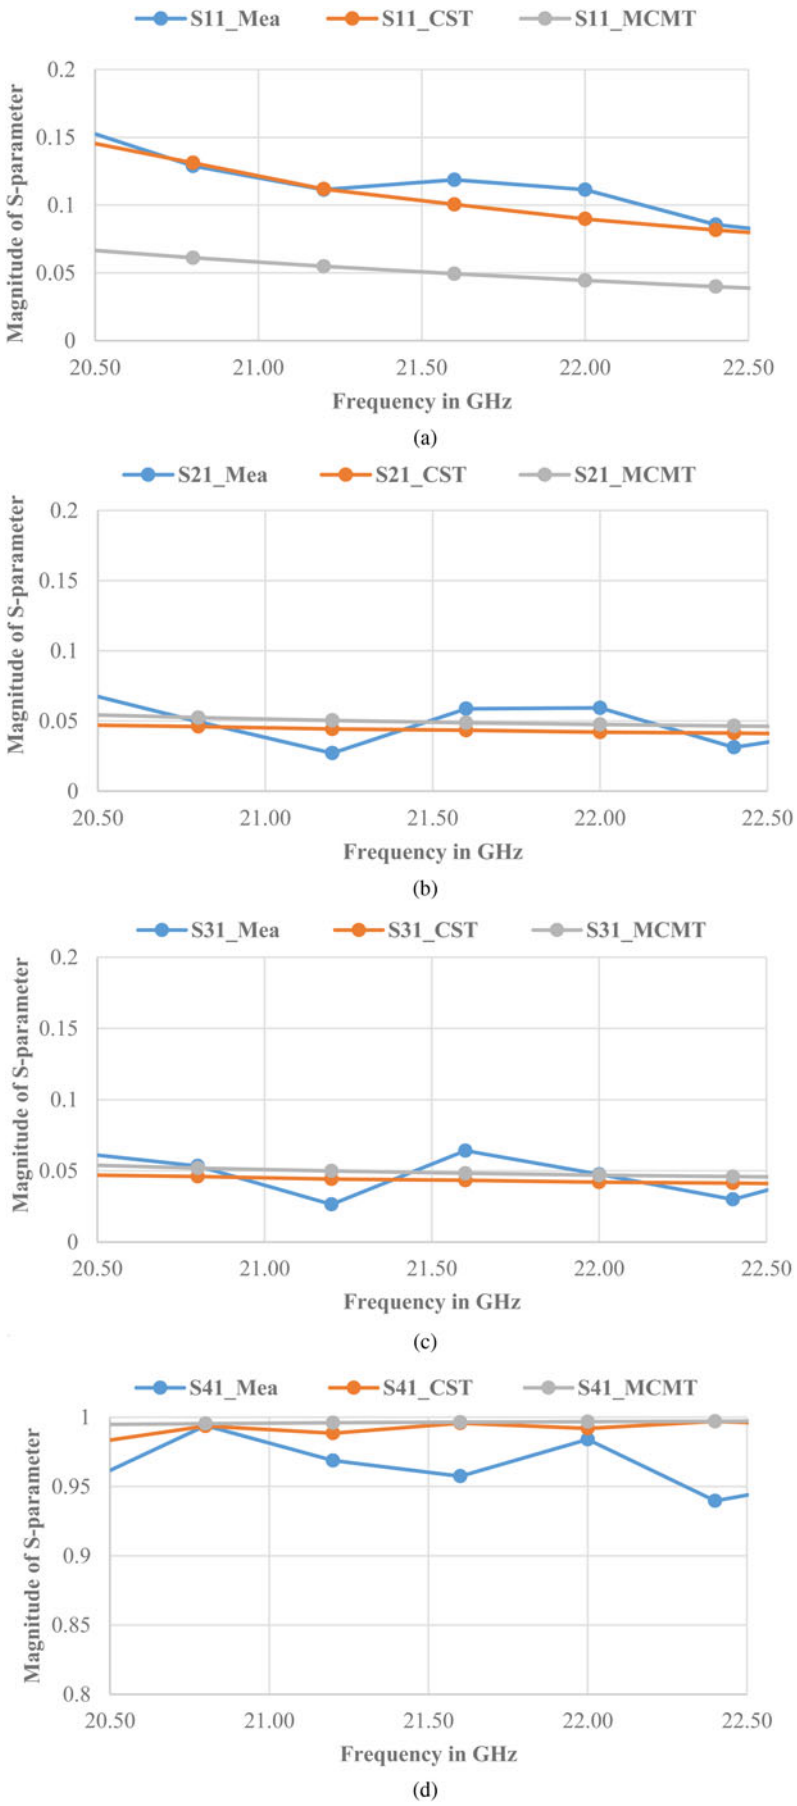


Fig. 5. Comparison of scattering parameters (a) S_{11}, (b) S_{21}, (c) S_{31} and (d) S_{41} of MCMT, CST microwave studio simulated data and measured data for E-plane WR-42 waveguide two-channel joints for K-band with a gap of 2t = 0.3 mm, d = 0.6 mm and d1 = 6.18 mm.


https://doi.org/10.1017/S1759078722000423 Published online by Cambridge University Press

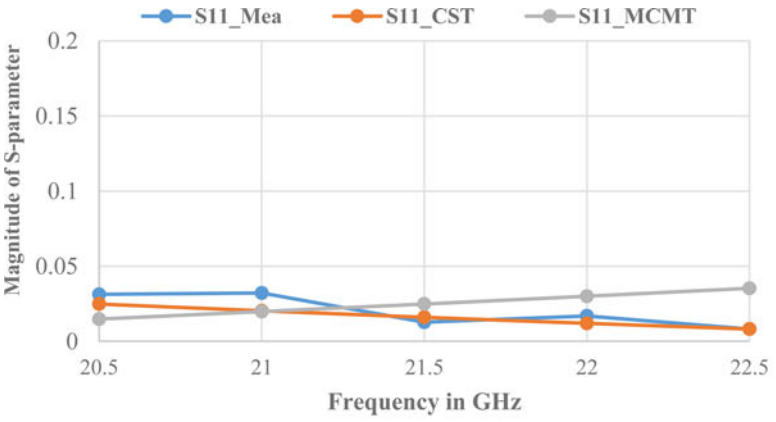


(a)

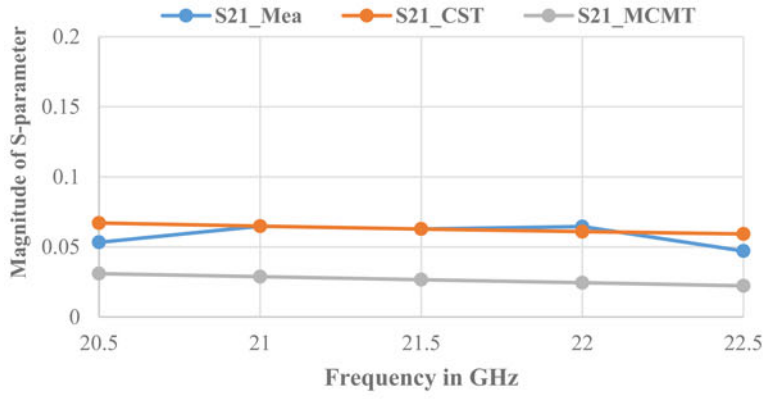

(b)

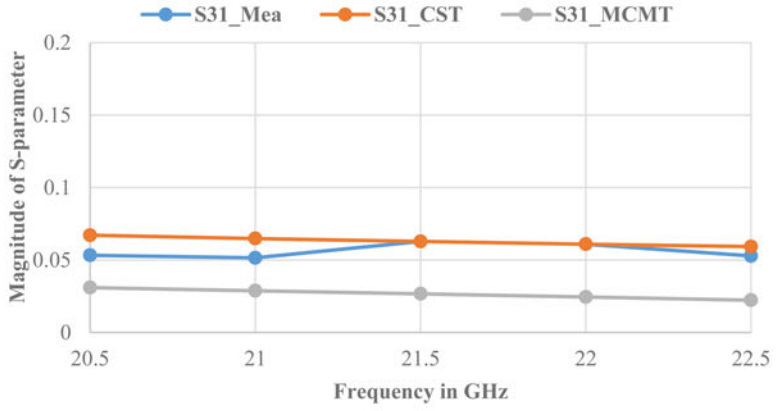

(c)

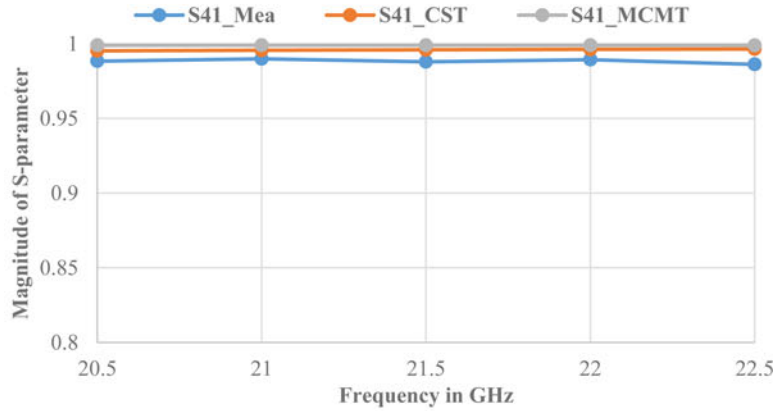

(d)

Fig. 6. Comparison of scattering parameters (a) S_{11}, (b) S_{21}, (c) S_{31} and (d) S_{41} of MCMT, CST microwave studio simulated data and measured data for E-plane WR-42 waveguide two-channel joints for K-band with a gap of 2t = 0.5 mm, d = 0.166 mm and d1 = 2.182 mm.

https://doi.org/10.1017/S1759078722000423 Published online by Cambridge University Press

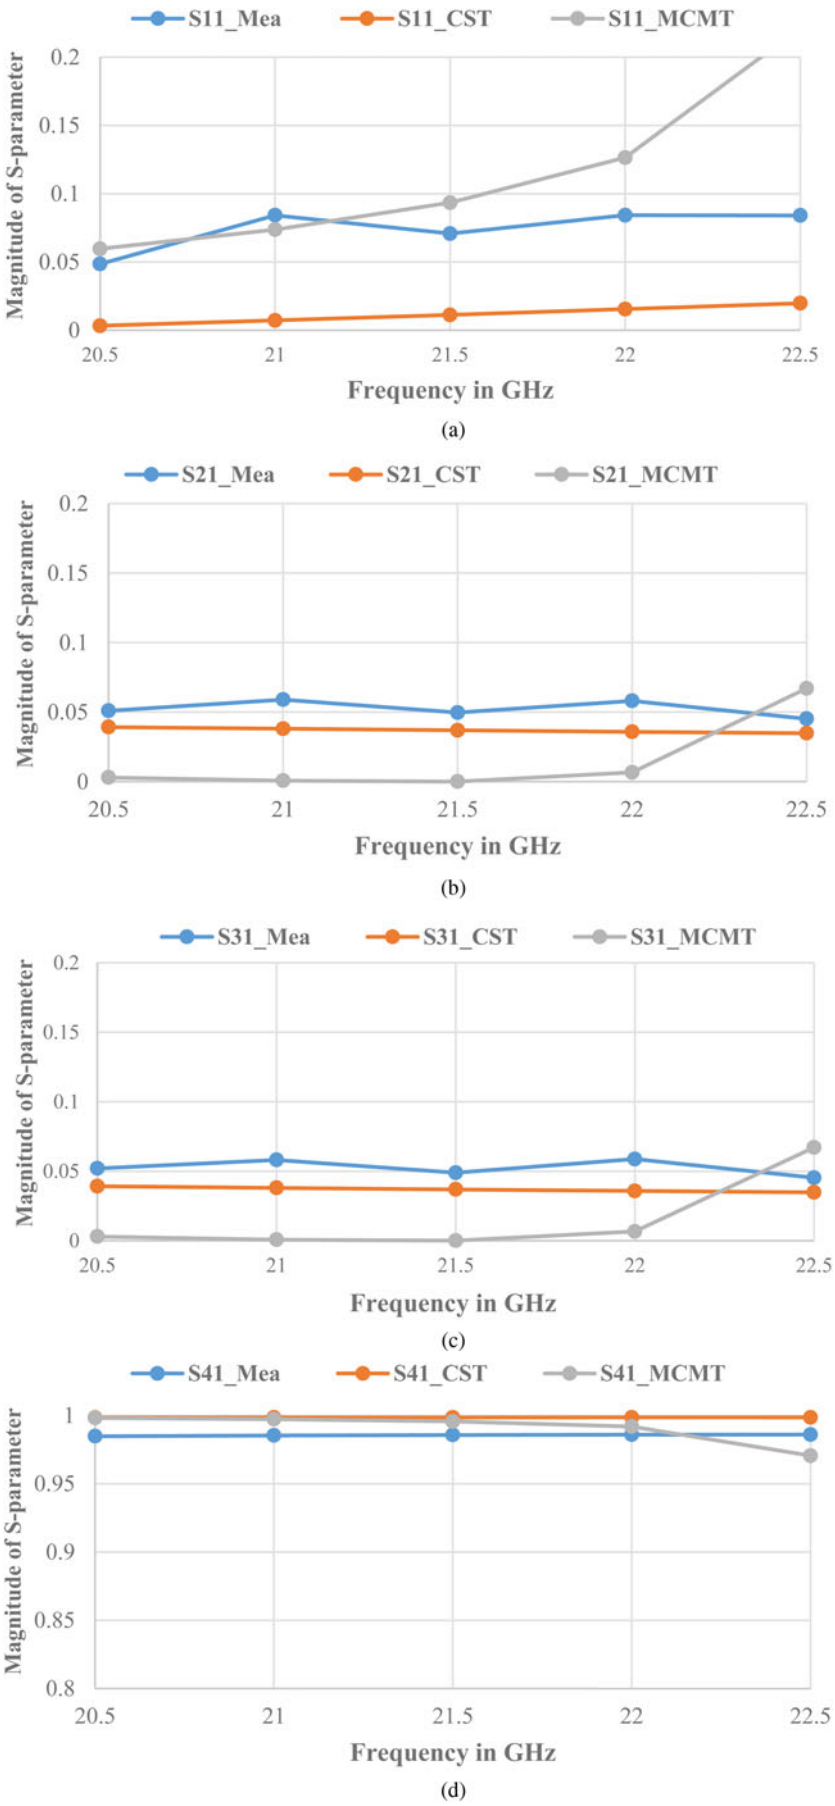


Fig. 7. Comparison of scattering parameters (a) S_{11}, (b) S_{21}, (c) S_{31} and (d) S_{41} of MCMT, CST microwave studio simulated data and measured data for E-plane WR-42 waveguide two-channel joints for K-band with a gap of 2t = 0.3 mm, d = 0.66 mm and d1 = 3.184 mm.

https://doi.org/10.1017/S1759078722000423 Published online by Cambridge University Press

$$e_p^{i,y} = \begin{cases} \sin\left\{\frac{p\pi}{2W}(z - z_w + W)\right\} & \text{for } y_w - L \le y \le y_w + L, \\ & z_w - W \le z \le z_w + W \\ 0 & \text{elsewhere} \end{cases} \quad (2b)$$

In the above expressions $L = a$, $W = b$, where 2a = 10.668 mm and 2b = 4.318 mm, s = 1.02 mm and 2s is the distance between wvg-1 and wvg-4.

The aperture field distributions can be determined by the knowledge of unknown weight $E_p^{i,y/z}$. Apertures are representing the boundary between different regions as shown in Fig. 1. For each aperture, there are two boundary conditions, corresponding to the two tangential components (Y and Z). These boundary conditions have been solved using Galerkin's specialization of the method of the moment [15]. In this method, weighting functions $w_q^{i,y/z}(x, y, z)$ are assumed to be the same as basis functions $e_p^{i,y/z}$. Reflection and transmission coefficient has been derived as the procedure outlined in [12].

Result and discussion

Based on theory, for the analysis of co-channel interference, MATLAB codes have been written, and simulation has been done using CST microwave studio. For validation of theory, measurement has been carried out. During the measurement two-channel E-plane bends are joined together with a common flange and a copper plate, as shown in Fig. 3. Scattering parameters data obtained from MCMT analysis for E-plane WR-42 two channels waveguide joint at K-band has been compared with CST microwave studio simulated data as well as with measured data.

In the beginning, measurement of the magnitude of S-parameter for frequency range 20.5–22.5 GHz without metallic plate has been done by VNA (Agilent Technologies, E8363B) which is shown in Fig. 4. Further, different dimensions of the gap have been taken, shown in Table 1.

One after another measurement of the magnitude of S_{11}, S_{21}, S_{31} and S_{41} for K-band E-plane WR-42 waveguide two-channel joints with different gap sizes has been done as shown in Figs 5–7. From Figs 5(a) to 5(d), it depicts that the maximum value of coupling of power is 0.33% at 21.6 GHz while in Figs 6(a) to 6(d) it is 0.36% over the frequency range 21 to 22 GHz. From Figs 7(a) to 7(d), It shows that the highest value of coupling is 0.25% at 22 GHz.

Conclusion

Different dimensions of the gap have been taken to analyze the co-channel interference. The comparison of scattering parameters shows excellent matching of CST simulated data, measured data and MCMT data. It has been seen that the maximum value of coupling of power to neighboring port is 0.36% over the frequency range 21 to 22 GHz when the gap size is 2t = 0.5 mm, d = 0.166 mm and d1 = 2.182 mm. MCMT technique can be used for other higher frequency bands. This analysis is helpful to give insight for multiple input and multiple output applications.

Acknowledgements. The support provided by Medicaps University is gratefully acknowledged.

References

1. **Lafata P** (2011) FAR-END crosstalk modeling based on capacitive and inductive unbalance between pairs in a cable. *Information and Communication Technologies and Services* **9**, 14–20.
2. **Nasab MH and Cheldevi A** (2006) Coupling model for the two orthogonal microstrip lines in two layer PCB board (quasi – TEM approach). *Progress in Electromagnetics Research* **60**, 153–163.
3. **Balasubramanian R, Miyazaki YY and Kondo M** (2007) Investigation of crosstalk effects due to optical fiber nonlinearities in WDM CATV network. *Progress In Electromagnetics Research Online* **3**, 940–942.
4. **Panda DK and Chakraborty A** (2008) Analysis of co-channel interference at waveguide joints using multiple cavity modeling technique. *Progress in Electromagnetics Research Letters* **4**, 91–98.
5. **Panda DK and Chakraborty A** (2011) Cross talk analysis at faulty multichannel waveguide joints. *International Journal of Microwave and Optical Technology* **6**, 51–56.
6. **Sharma N and Panda DK** (2021) Crosstalk analysis of E-plane Ku band waveguide joints. *Progress in Electromagnetics Research C* **151**, 175–185.
7. **Vengadarajan A** (1999) *Multiple Cavity Modelling Technique for Solving Aperture Coupled Waveguide Junctions* (Ph.D. dissertation). Department of Electronics & Electrical Communication Engineering, Indian Institute of Technology, Kharagpur.
8. **Das S, Chakraborty A and Chakrabarty A** (2006) Analysis of Folded E-plane Tee Junction using Multiple Cavity Modeling Technique. *ICECE*, Dhaka, Bangladesh.
9. **Panda DK and Chakraborty A** (2008) Analysis of Folded H-plane Tee Junction Using Multiple Cavity Modeling Technique. *Proceedings of International conferences on Industrial and Information system*, IIT Kharagpur.
10. **Das S and Chakraborty A** (2006) A novel modeling technique to solve a class of rectangular waveguide based circuit and radiators. *Progress in Electromagnetic Research* **61**, 231–252.
11. **Das S, Chakraborty A and Chakraborty A** (2007) Analysis of Multiport Waveguide Power Divider/Combiner for Phased Array Application. *NCC 2007*, Kanpur, India.
12. **Panda DK** (2010) *Analysis and Design Of Longitudinal Rectangular Waveguide Power Dividers/Combiners using Multiple Cavity Modeling Technique* (Ph. D. Dissertation). Department of Electronics & Electrical Communication Engineering, Indian Institute of Technology, Kharagpur.
13. **Panda DK and Chakraborty A** (2015) Analysis and design of longitudinal power divider/combiner for higher frequencies. *International Journal of Microwave and Optical Technology* **10**, 240–244.
14. **Harrington RF** (1961) *Time Harmonic Electromagnetic Fields*. New York: McGraw-Hill Book Company.
15. **Harrington RF** (1968) *Field Computation by Moment Methods*. Malabar, FL: Roger E. Krieger Publishing Company.



Neelam Sharma obtained her diploma in 2001 and B.E. in 2004 from RGPV University. She also received her M.Tech in 2011 from DAVV University. Currently, she is pursuing Ph.D. from Medicaps University, Indore, India.



Dr. Debendra Kumar Panda obtained his ME in 2003 from the Indian Institute of Engineering Science and Technology and Ph.D. (electronics and electrical communication engineering) in 2010 from the Indian Institute of Technology Kharagpur, West Bengal, India. He is currently working as pro-vice chancellor in Medicaps University, Indore, India.

https://doi.org/10.1017/S1759078722000423 Published online by Cambridge University Press