International Journal of Microwave and Wireless Technologies

cambridge.org/mrf

Penta-band microstrip patch antenna with small frequency ratios using metamaterial for wireless applications

Praveen Chaurasia[1], Binod Kumar Kanaujia[2], Santanu Dwari[1] and Mukesh Kumar Khandelwal[3]

[1]Department of Electronics Engineering, Indian Institute of Technology ISM Dhanbad, Jharkhand-826004, India; [2]School of Computational and Integrative Sciences, Jawaharlal Nehru University, Delhi-110067, India and [3]Department of Electronics & Communication Engineering, Bhagwan Parshuram Institute of Technology, Delhi-110089, India

Research Paper

Cite this article: Chaurasia P, Kanaujia BK, Dwari S, Khandelwal MK (2018). Penta-band microstrip patch antenna with small frequency ratios using metamaterial for wireless applications. *International Journal of Microwave and Wireless Technologies* **10**, 968–977. https://doi.org/10.1017/S1759078718000570

Received: 2 December 2017
Revised: 28 February 2018
Accepted: 1 March 2018
First published online: 11 July 2018

Key words:
Dipole; inter digital capacitor-loaded loop resonator; microstrip equilateral triangular patch antenna; rectangular split-ring resonator

Author for correspondence:
Binod Kumar Kanaujia,
E-mail: bkkanaujia@ieee.org

Abstract

A novel shape penta-band microstrip patch antenna is presented in this paper. The proposed antenna shows five operating frequencies and can be used for various wireless applications, i.e. 2.58 GHz for non-direct line of sight, wireless Internet service providers, and compatible with Navini Networks; 3.17 and 3.42 GHz for WiMAX; 4 GHz for C-band application such as weather radar systems; and 5.3 GHz for higher WLAN. Very small frequency ratios of the values 1.2286, 1.078, 1.169, and 1.325 are achieved between two consecutive resonant frequencies. Antenna design techniques for achieving five bands are presented and discussed step by step. The analysis is done by Ansoft HFSS v.15, and results are verified with experimental results of fabricated prototypes.

Introduction

Now-a-days, single antenna is desired for more than one application. Many researchers have made large efforts to design such kind of antennas, which can be used for multiband operations [1–3]. Several researchers have worked in the field of multiband antennas [4]. Small frequency ratios between two consecutive resonant frequencies are a great challenge to achieve while designing a multiband antenna [5, 6]. In the same regard, several types of antenna structures with small frequency ratio have been designed for different wireless applications [7–10]. Directional wide-band antenna with asymmetric fed has been presented in order to optimize antenna gain [11, 12]. A printed parasitic element with metamaterial also has been embedded with a wide-band antenna for desired multiband operation [13–16]. Wide impedance bandwidth also has been achieved with multiband operation by using slotted antenna [17–19]; however, reported antennas are based on multiple feeding networks, which introduce some deficiencies in the performance including mutual coupling and spurious radiations from feed. As the recent requirement for commercial communication applications, multiband antennas should be operated in non-direct line of sight (NLOS), wireless Internet service providers (WISP), C-band application such as weather radar systems (3.7–4.2 GHz), Mobile-WiMAX (2.5/3.3/3.5 GHz), and higher WLAN (5.05–5.35 GHz) [9–23].

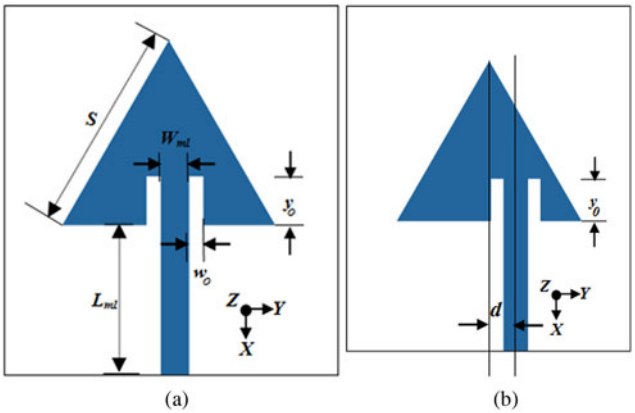


Fig. 1. Schematic representation of the triangular patch antenna with (a) inset feed and (b) asymmetric offset inset feed.

© Cambridge University Press and the European Microwave Association 2018

CAMBRIDGE UNIVERSITY PRESS

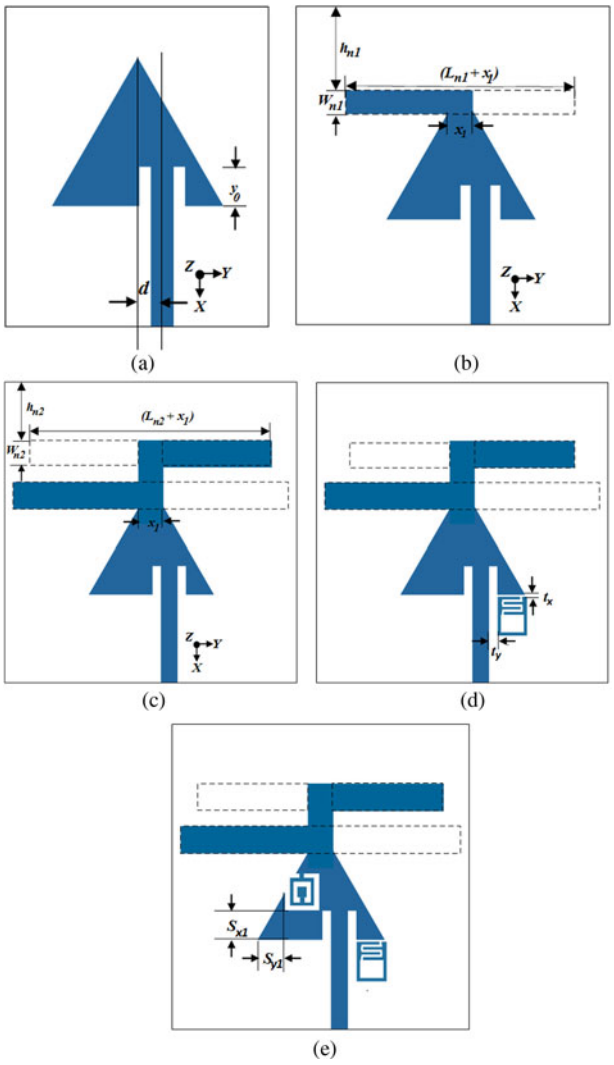


Fig. 2. Schematic representation and step-by-step evolution of the proposed design; (a) case I – *Ant_1*, (b) case II – *Ant_2*, (c) case III – *Ant_3*, (d) case IV – *Ant_4*, and (e) case V – *Ant_5*.

Table 1. Design specification of antenna designs along with their metamaterials

Design	Parameter	Value (mm)	Parameter	Value (mm)
Ant_1	S	17	y_0	2.77
	w_o	0.5	L_{ml}	8.435
	W_{ml}	3.011	d	2.125
Ant_2	L_{n1}	28.9345	x_1	1.8
	W_{n1}	3.7	h_{n1}	10.5
Ant_3	L_{n2}	23.8248	h_{n2}	5.8
	W_{n2}	3.7		
Ant_4	t_x	0.2	t_y	0.5
Ant_5	S_{x1}	3.35	S_{y1}	2.9885
Rectangle SRR	S_g	0.7	S_c	0.35
	S_d	0.6	a_{ext}	2.5
IDCLLR	L_r	5	W_r	4
	W_g	0.1	W_s	0.2
	W_d	0.3	W_l	5
	W_c	0.6		

In this article, a penta-resonant, novel-shaped patch antenna along with dipole and metamaterial is proposed with very small frequency ratio. Design steps are presented and discussed along with its performance parameters. The proposed design characteristics are analyzed using Ansoft HFSS v.15 based on finite element method and results are matched with the measurement of fabricated antenna's prototypes. The proposed antenna is low profile and fabricated on an FR-4 Epoxy substrate, which is cheaper and commercially available. It can be easily fabricated on a single substrate using standard photolithography process, which is a merit of the proposed antenna over available literature.

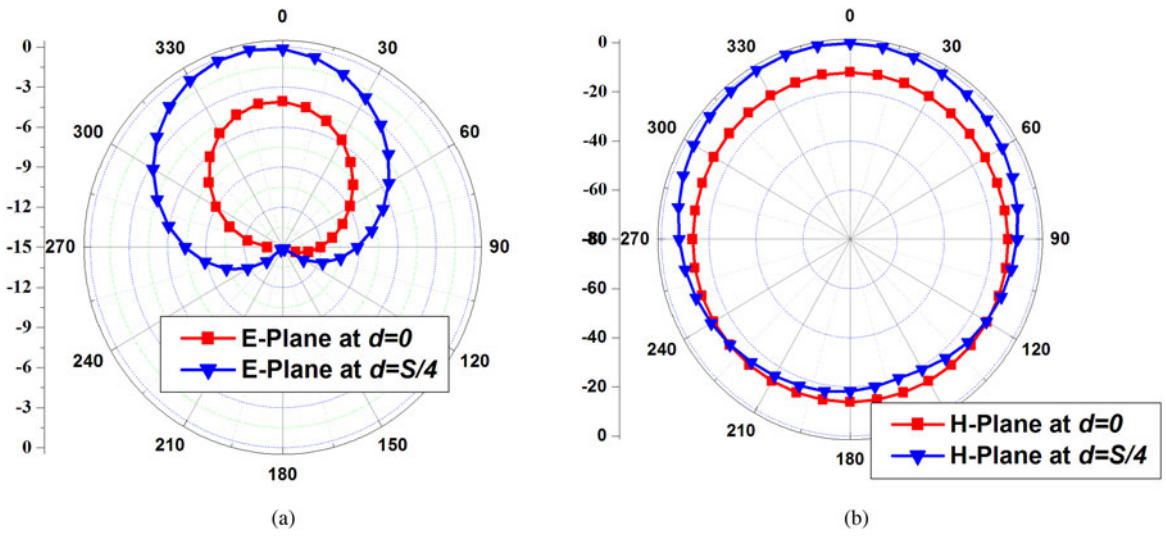


Fig. 3. The radiation pattern of a triangular patch antenna for different values of offset distance d; (a) E-plane, (b) H-plane.

https://doi.org/10.1017/S1759078718000570 Published online by Cambridge University Press

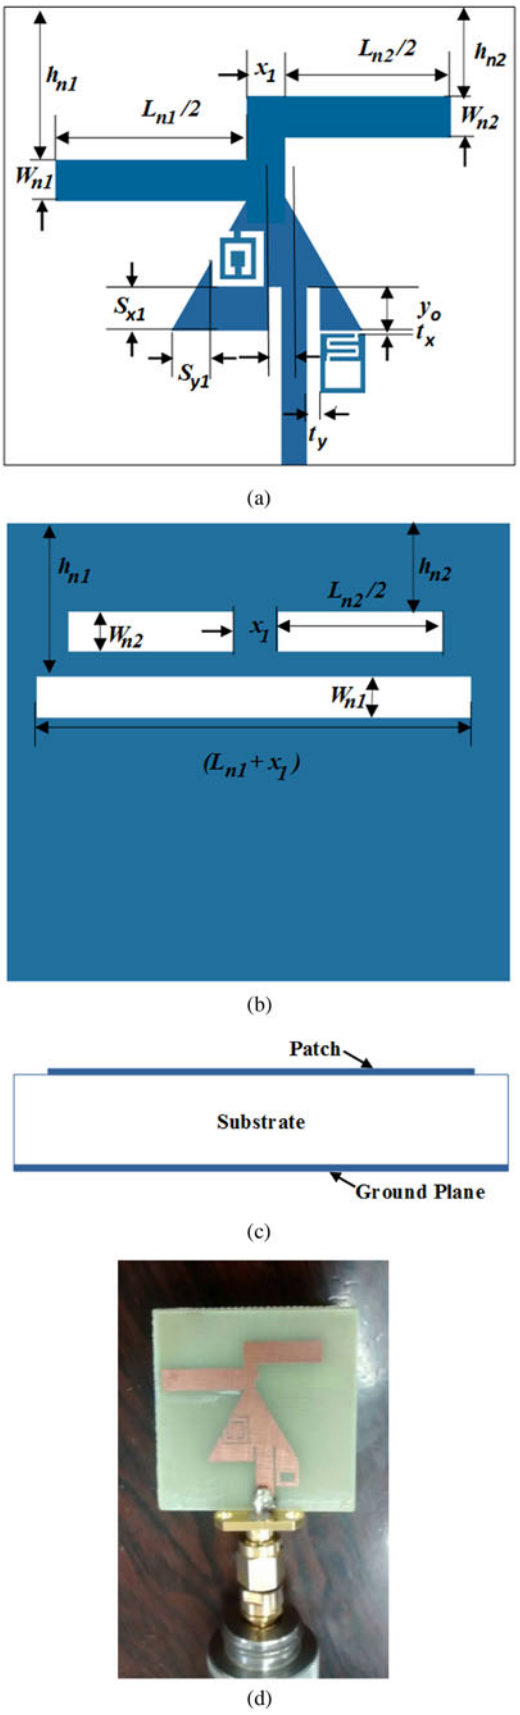


Fig. 4. Schematic representation of the proposed design *Ant_5*; (a) top view, (b) ground plane, (c) side view, and (d) fabricated prototype.

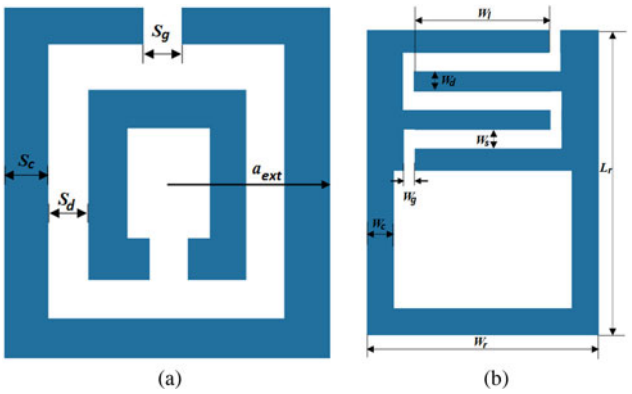


Fig. 5. Schematic representation of a single unit; (a) rectangle SRR, (b) IDCLLR.

Proposed structure

The schematic representation and design steps of the proposed structure are presented in Figs 1 and 2. An equilateral triangular patch of edge S is taken as a reference in Fig. 1(a). This equilateral triangular patch is fed by a microstrip line of length L_{ml} and width W_{ml}. The input impedance of the patch is matched with the characteristics impedance of microstrip line through inset feed of length y_0 and slot width w_0. The structure is designed for 5 GHz and detailed parameters are given in Table 1.

Length L_{ml} of the microstrip line is calculated as [24, 25]

$$L_{ml} = \frac{c}{4f_r\sqrt{\varepsilon_{effml}}}, \tag{1}$$

where

$$\varepsilon_{effml} = \frac{\varepsilon_r + 1}{2} + \frac{0.5(\varepsilon_r - 1)}{\sqrt{1 + 12(h/W_{ml})}}, \tag{2}$$

$$S = S_{eff} - \frac{4h}{\sqrt{\varepsilon_r}}, \tag{3}$$

where S, S_{eff}, h, and ε_r are the edge of the equilateral triangular patch, the effective length of the edge of the equilateral triangular patch, height of the dielectric substrate, and relative dielectric constant of the dielectric substrate, respectively.

Effective length S_{eff} is calculated as [25]

$$S_{eff} = \frac{2C}{3f_r\sqrt{\varepsilon_{eff}}}, \tag{4}$$

where C, ε_{eff}, and f_r are the speed of light in free space, effective dielectric constant, and resonance frequency, respectively.

Further, the asymmetric feed is introduced in the equilateral triangular patch as shown in Fig. 1(b). The microstrip line is shifted toward its right by a distance d for asymmetric feed. Offset feed method for triangular patch antenna has been reported for the enhancement of impedance bandwidth [11, 12]. Asymmetric feed provides directional radiation in the end-fire direction (z-direction) as shown in Fig. 3. It is observed that antenna starts to radiate in the end-fire direction as the offset distance d is increased to the value of $S/4$.

https://doi.org/10.1017/S1759078718000570 Published online by Cambridge University Press

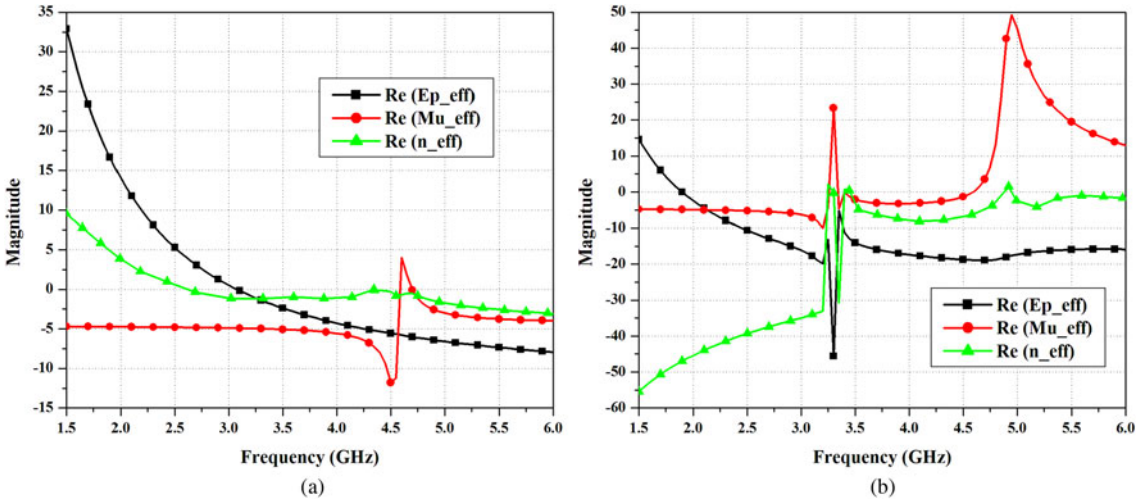


Fig. 6. Metamaterial characteristic of a single unit; (a) rectangular SRR, (b) IDCLLR.

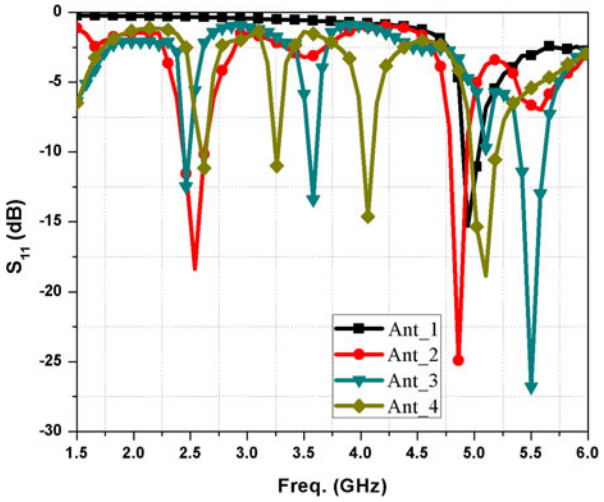


Fig. 7. S_{11} characteristics with the frequency of *Ant_1*, *Ant_2*, *Ant_3*, and *Ant_4*.

Table 2. Frequency ratio of the proposed design *Ant_5* in comparison with recent works

Multiband antenna	Number of resonating bands	Minimum frequency ratio
[3]	2	1.28
[4]	2	1.21
[5]	2	1.05
[6]	2	1.03
[17]	2	1.28
[18]	2	1.10
[19]	2	1.10
[20]	3	1.528
[21]	3	1.613
[22]	4	1.086
Proposed design *Ant_5*	5	1.078

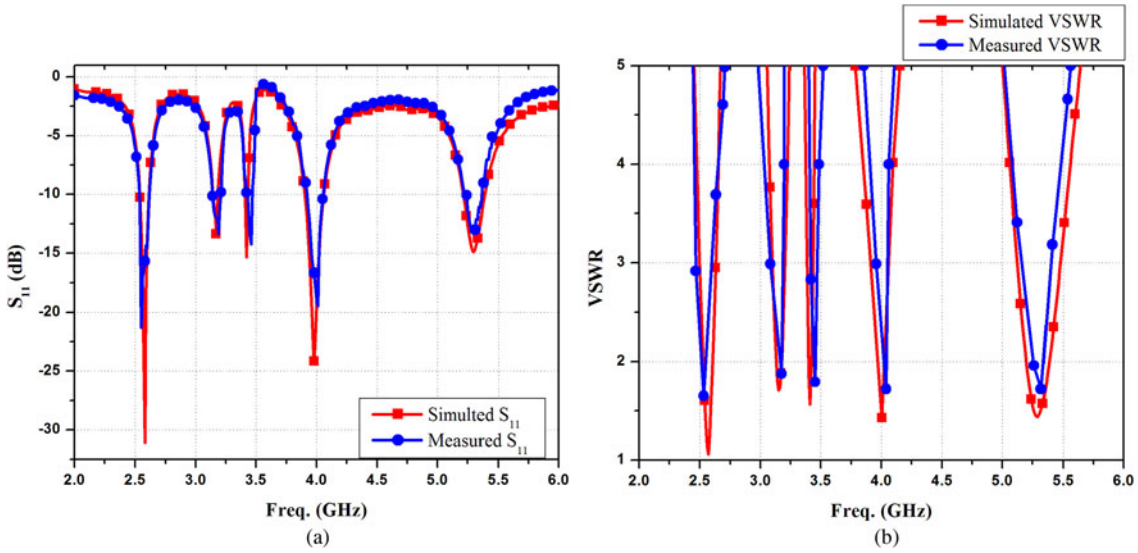


Fig. 8. Measured and simulated characteristics with the frequency of the proposed antenna *Ant_5*; (a) S_{11}, (b) VSWR.

https://doi.org/10.1017/S1759078718000570 Published online by Cambridge University Press

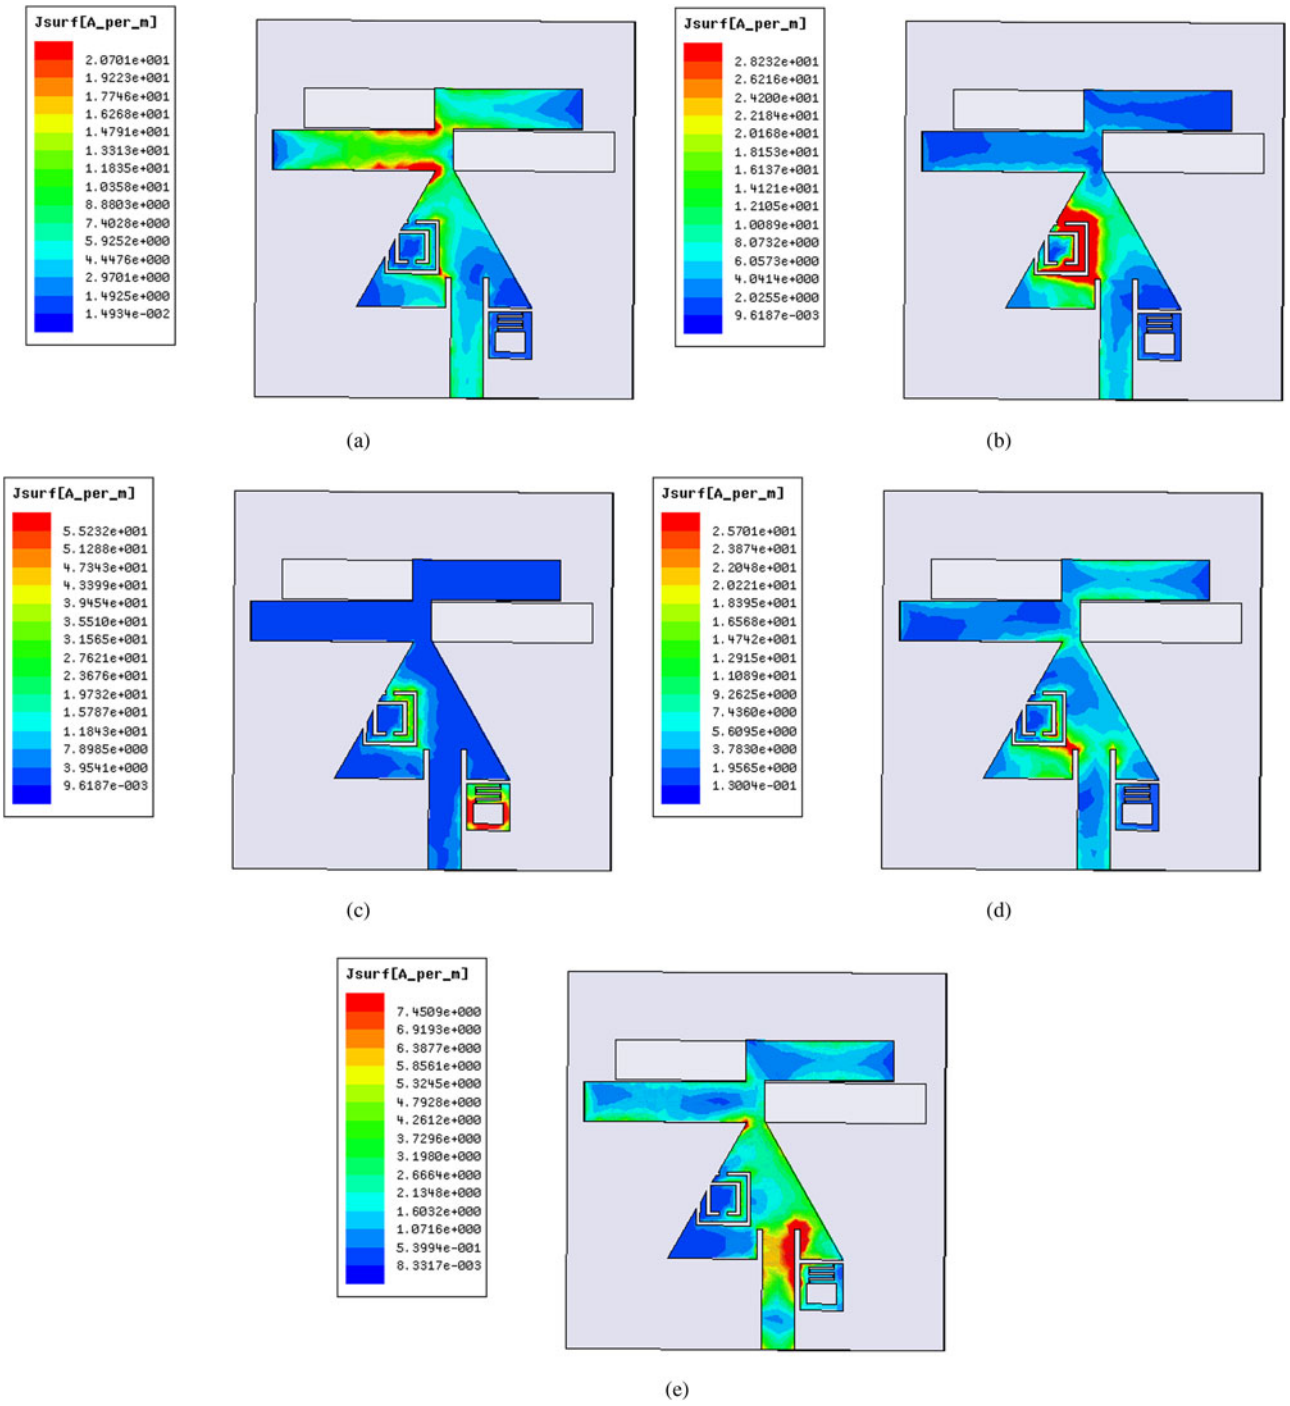


Fig. 9. Current distributions at (a) 2.58 GHz, (b) 3.17 GHz, (c) 3.42 GHz, (d) 4 GHz, and(e) 5.3 GHz.

The schematic representation and step-by-step evolution of the proposed structure are shown in Fig. 2. In case I, offset feeding is introduced in the equilateral triangular patch to achieve the directional radiation pattern and the antenna structure is referred as *Ant_1*, which is shown in Fig. 1(b).

For case II, a dipole is designed for 2.5 GHz and embedded with a triangular patch, which is referred as *Ant_2* and shown in Fig. 2(b). Half-length of the dipole is embedded with a patch on the signal plane, whereas a slot of length $(Ln_1 + x_1)$ is embedded on the ground plane; in which, x_1 is the width of the connecting strip. The length L_{n1} and width W_{n1} of the first dipole are calculated from equations (5) and (6), respectively.

Half-length $L_n/2$ of the dipole is the quarter wavelength and calculated as

$$\frac{L_n}{2} = \frac{\lambda_{eff}}{4} = \frac{c}{4f_r\sqrt{\varepsilon_{eff}}}, \tag{5}$$

where c, ε_{eff}, and f_r are the speed of light in free space, effective

https://doi.org/10.1017/S1759078718000570 Published online by Cambridge University Press

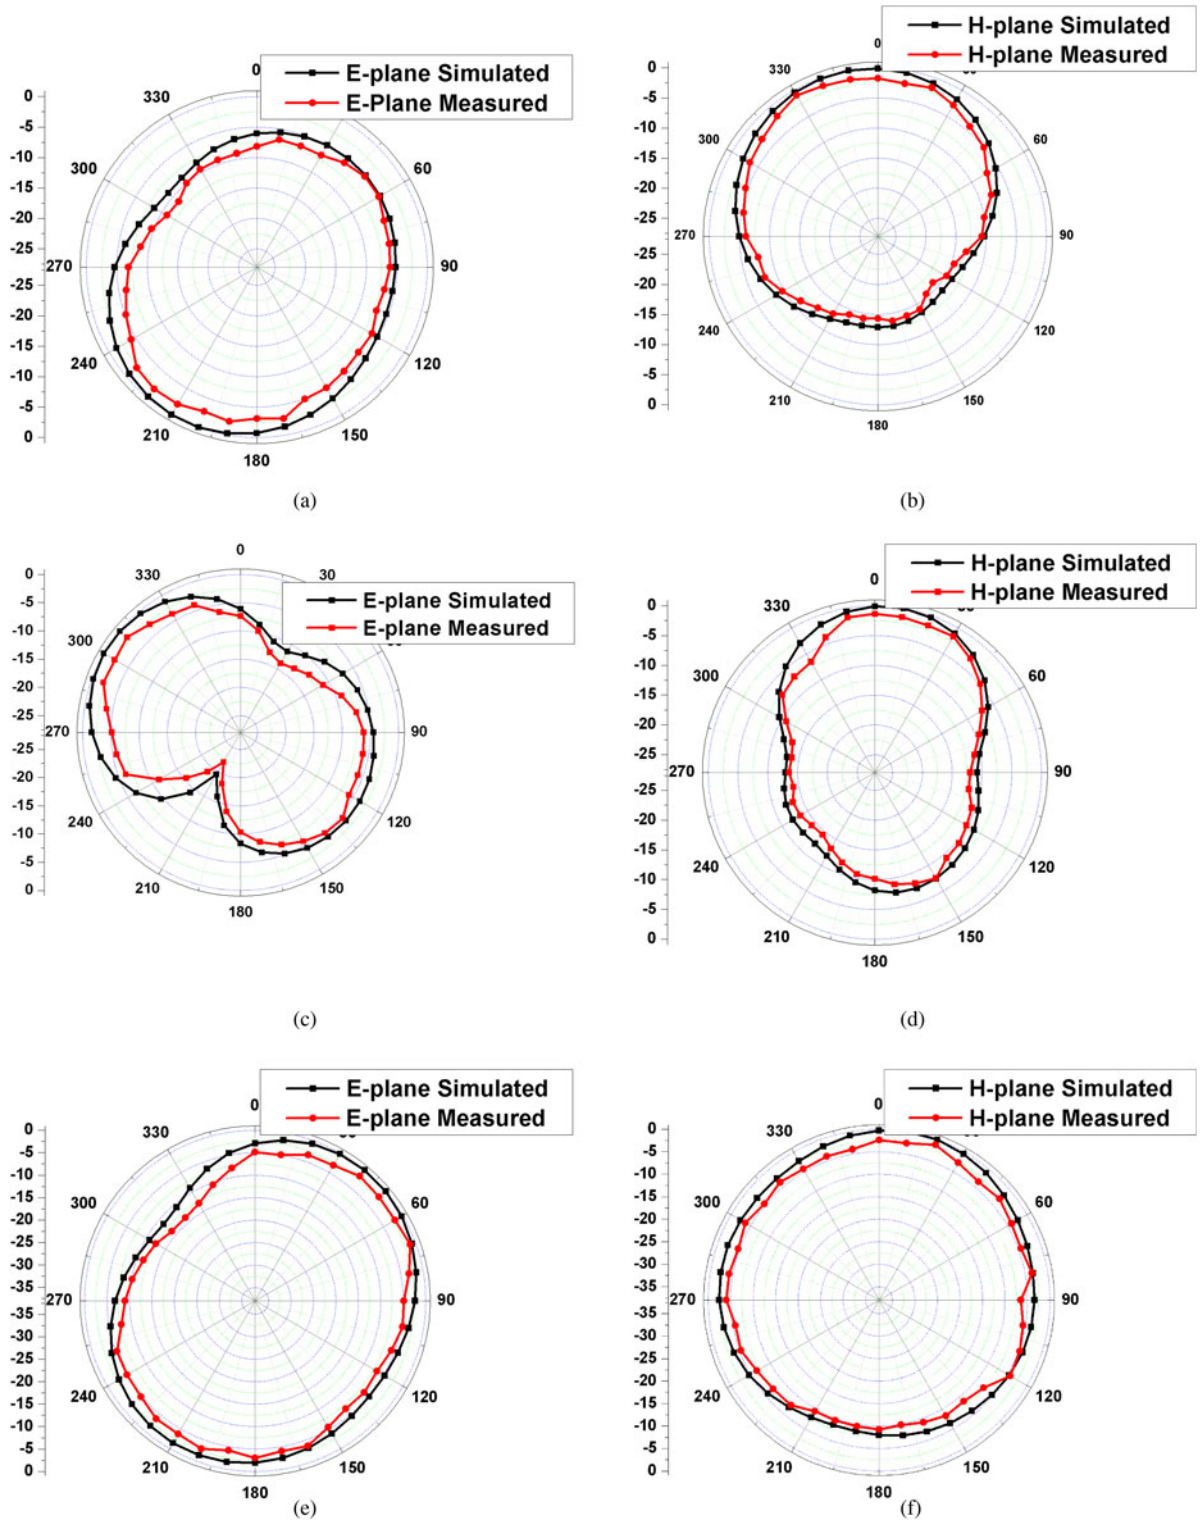


Fig. 10a. Measured and simulated normalized radiation pattern of the proposed antenna; (a) *E*-plane at 2.58 GHz, (b) *H*-plane at 2.58 GHz, (c) *E*-plane at 3.17 GHz, (d) *H*-plane at 3.17 GHz, (e) *E*-plane at 3.42 GHz, (f) *H*-plane at 3.42 GHz, (g) *E*-plane at 4 GHz, (h) *H*-plane at 4 GHz, (i) *E*-plane at 5.3 GHz, and (j) *H*-plane at 5.3 GHz.

permittivity ($\varepsilon_{eff} \leq \varepsilon_r$), and resonating frequency of dipole, respectively. Resonant frequency f_r of the dipole is taken as 2.5 GHz in this study.

Width W_{n1} of the dipole corresponding to its length L_{n1} is related to its impedance and calculated by equation (6) [25]. The impedance of the dipole is matched to the input impedance of the edge of the microstrip patch.

$$W_n = \frac{\pi L_n}{exp((R_{in}(x=0)/120) + 2.25)}, \quad (6)$$

https://doi.org/10.1017/S1759078718000570 Published online by Cambridge University Press

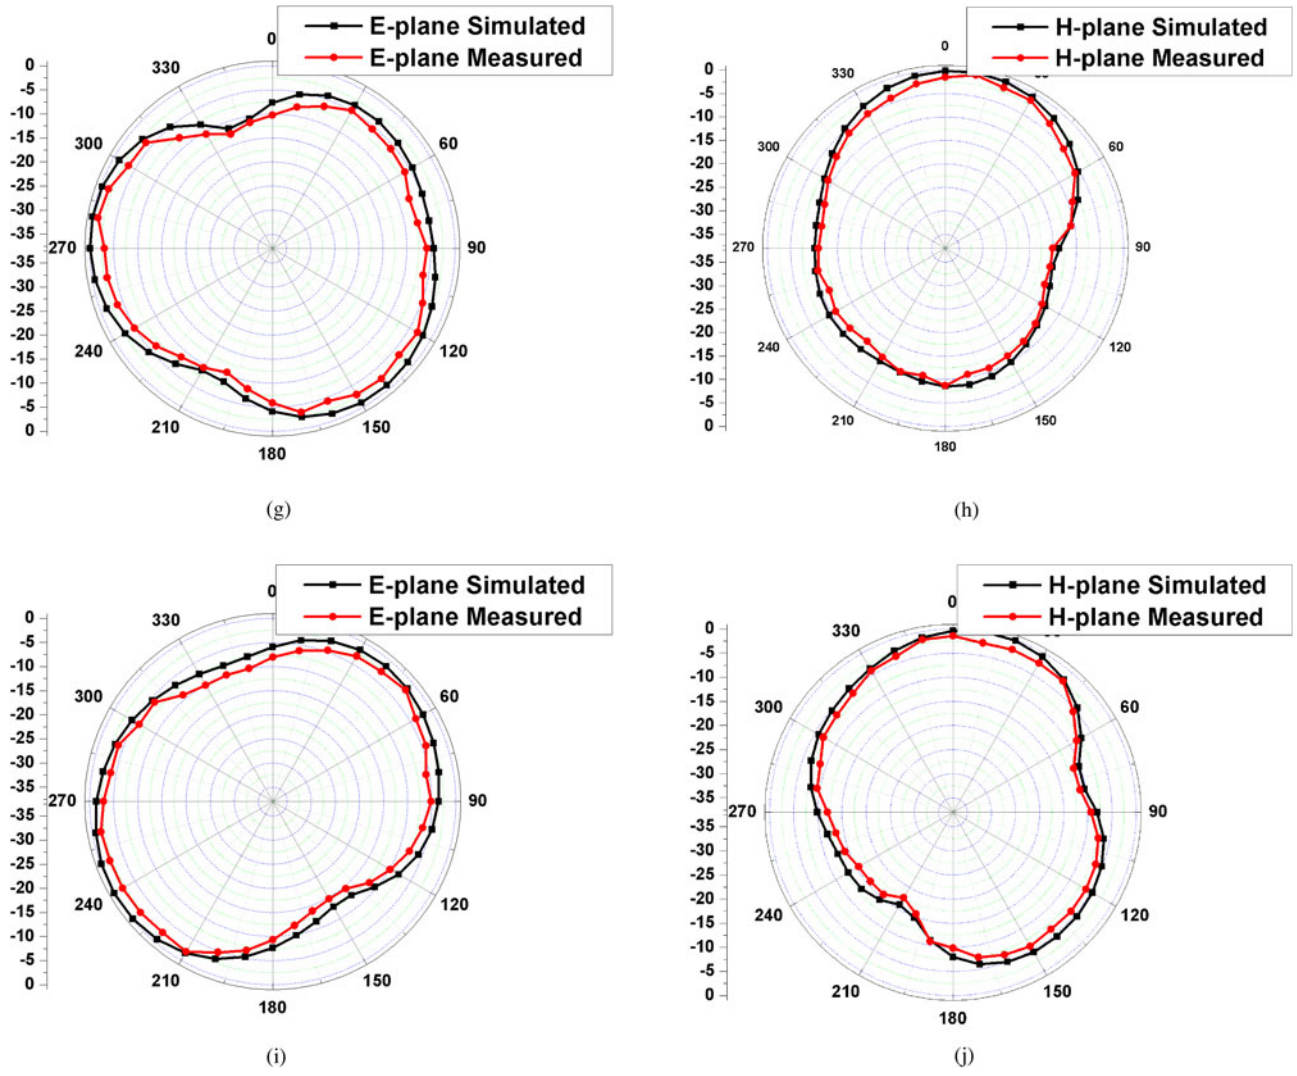


Fig. 10b. Continued.

where R_{in} $(x = 0)$ is the input impedance at the edge of microstrip patch antenna and calculated by equation (7) [24]:

$$R_{in}(x = 0) = \frac{50}{cos^2(\pi S_0/S)}, \tag{7}$$

where S is the edge of the equilateral triangular patch and S_0 is the length of the transmission line corresponding to 50 Ω impedance.

In case III, one more dipole is embedded and the structure is referred as *Ant_3*, which is shown in Fig. 2(c). The second dipole is designed for 4 GHz, and the length L_{n2} and width W_{n2} are calculated by equations (5) and (6), respectively. Their relevant values are adjusted up to the minimum extent to maintain the resonant peak at the specific frequency by parametric analysis.

In case IV, an inter digital capacitor-loaded loop resonator (IDCLLR) [13, 14] is embedded below the right corner of the edge of the triangular patch as shown in Fig. 2(d) and the structure is referred as *Ant_4*.

In case V, a slot and a slit of rectangular split-ring resonators (SRR) [15, 16] are embedded in the left corner of the triangular patch as shown in Fig. 2(e) and the structure is referred as *Ant_5*. The top and bottom views of a schematic representation of the proposed *Ant_5* (case V) are shown in Figs 4(a) and 4(b), respectively. The dimensions of a single unit cell of rectangular SRR and IDCLLR are shown in Fig. 5, and the real permittivity, permeability, and refractive index of the unit cell are shown in Figs 6(a) and 6(b). The detailed dimensions of all the structures are listed in Table 1.

Analysis and result discussion

The FR-4 Epoxy substrate of dimensions 35 mm × 35 mm × 1.5748 mm is used to analyze the proposed antennas. Fabrication is done by standard photolithography process and measurement is done by Agilent™PNA-L Series Network Analyzer and Agilent™ Spectrum Analyzer. A fabricated prototype of *Ant_5* is depicted in Fig. 4(d). Figure 7 shows the S_{11} variation with the frequencies *Ant_1*, *Ant_2*, *Ant_3*, and *Ant_4*

https://doi.org/10.1017/S1759078718000570 Published online by Cambridge University Press

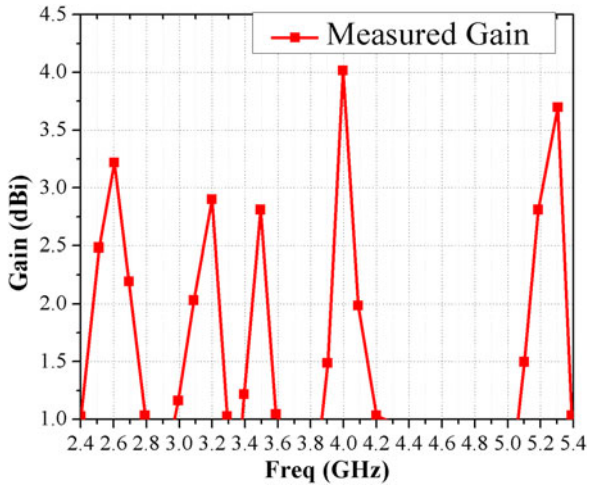


Fig. 11. Measured gain variation with the frequency of the proposed antenna.

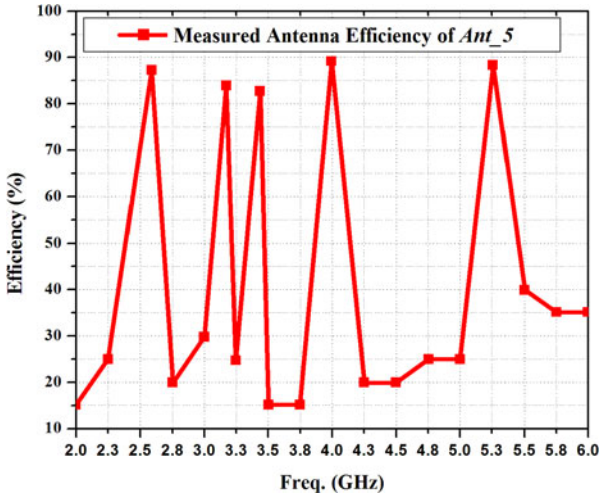


Fig. 12. Measured antenna efficiency variation with the frequency of the proposed antenna *Ant_5*.

corresponding to cases I–IV. *Ant_5* shows five resonating frequency bands with very small frequency ratios as shown in Fig. 8. S_{11} and VSWR characteristics with the frequency of *Ant_5* is shown in Figs 8(a) and 8(b), respectively. All five resonating bands are achieved by the presented mathematical design equations; however, the least parametric analysis is done to achieve sharp resonance for the specific applications. *Ant_5* resonates at 2.58, 3.17, 3.42, 4.0, and 5.3 GHz with very small frequency ratios of the values 1.2286, 1.078, 1.169, and 1.325 between two consecutive resonant frequencies, respectively. A comparative study is shown in Table 2.

The current distribution of the proposed antenna *Ant_5* at each resonant frequency is shown in Fig. 9. The working mechanism of the proposed antenna could be defined with the help of the shown current distribution: (i) dipoles embedded in the front of the triangular patch and ground are mainly contributing to generate 2.58 GHz frequency as shown in Fig. 9(a); (ii) 3.17 GHz frequency is achieved due to a slot and a slit of rectangular SRR, which can be clearly observed in Fig. 9(b); (iii) IDCLLR combined with a slit and a slot are playing a role in generating 3.42 GHz frequency; and finally (iv) 4 and 5.3 GHz frequencies are achieved due to the triangular patch with inset feed as shown in Figs 9(d) and 9(e), respectively.

Radiation patterns of the proposed antenna *Ant_5* are shown in Fig. 10. *E*-plane patterns of *Ant_5* are shown in Figs 10(a), 10(c), 10(e), 10(g), and 10(i); whereas *H*-plane patterns are shown in Figs 10(b), 10(d), 10(f), 10(h), and 10(j) at 2.58, 3.17, 3.42, 4.0, and 5.3 GHz frequencies, respectively. It is observed from Fig. 10 that *Ant_5* shows good radiation characteristics in both major planes. Measured results are in good agreement with the simulated results.

Figure 11 shows the measured gain variation with the frequency of the proposed antenna. *Ant_5* shows antenna gain of about 3.23, 2.9, 2.8, 4.01, and 3.49 dBi at frequencies 2.58, 3.17, 3.42, 4, and 5.3 GHz, respectively. Antenna efficiency is shown in Fig. 12, and it is observed that the proposed antenna *Ant_5* shows antenna efficiency around 87.5, 83.05, 82.45, 89.35, and 88.93% at respective bands. Performance of proposed *Ant_5* is compared in Table 3.

Table 3. Performance of the proposed design *Ant_5* in comparison with recent works

Multiband antenna	Number of resonating bands	Bandwidth (%)					Gain (dBi)				
		I	II	III	IV	V	I	II	III	IV	V
[3]	2	16	12.5	–	–	–	5	5	–	–	–
[4]	2	5.88	6.08	–	–	–	1.35	3.5	–	–	–
[5]	2	1.9	2	–	–	–	4.05	2.5	–	–	–
[6]	2	0.98	1.2	–	–	–	5.1	4.8	–	–	–
[17]	2	17	21	–	–	–	3.81	3.12	–	–	–
[19]	2	2.99	2.72	–	–	–	4.5	4.5	–	–	–
[20]	3	4.7	3.7	2.4	–	–	1.7	1.4	2.5	–	–
[22]	4	1.2	2	1.9	0.9	–	4.1	6.2	8	6.2	–
[23]	4	0.7	2.1	2.2	1.4	–	4.8	4	6	8	–
Proposed design *Ant_5*	5	4.65	4.1	3.8	5.2	5.8	3.23	2.9	2.8	4.01	3.49

https://doi.org/10.1017/S1759078718000570 Published online by Cambridge University Press

Conclusion

A novel-shaped penta-resonant antenna is designed and analyzed. The proposed antenna is resonating at 2.58, 3.17, 3.42, 4, and 5.3 GHz with a very small frequency ratio of the values 1.2286, 1.078, 1.169, and 1.325 between two consecutive resonant frequencies, respectively. Simulated results of the designed antenna are verified with measured results of the fabricated antenna. Proposed antenna shows good radiation characteristics and may be used for multiple wireless applications such as 2.58 GHz for NLOS, WISP, and compatible with Navini Networks (2.5–2.690 GHz); 3.17 and 3.42 GHz for WiMAX (3.3/3.7 GHz in Asia); 4 GHz for C-band application such as weather radar systems (3.7–4.2 GHz); and 5.3 GHz for higher WLAN (5.05–5.35 GHz).

References

1. **Fusco V** (2004) *Foundations of Antenna Theory and Techniques*, 3rd edn., Chapter-2. Harlow, UK: Prentice-Hall.
2. **Saxena S, *et al.*** (2017) A compact microstrip fed dual polarised multiband antenna for IEEE 802.11 a/b/g/n/ac/ax applications. *International Journal of Electronics and Communication AEU* **72**, 95–103.
3. **Singh DK, *et al.*** (2015) Multiband circularly polarized stacked microstrip antenna. *Progress in Electromagnetics Research C* **56**, 55–64.
4. **Khandelwal MK, *et al.*** (2015) Triple band circularly polarized compact microstrip antenna with defected ground structure for wireless applications. *International Journal of Microwave and Wireless Technologies* **8** (6), 943–953.
5. **Nasimuddin N, Chen ZN and Xianming Q** (2010) Dual-band circularly polarized S-shaped slotted patch antenna with a small frequency-ratio. *IEEE Transactions on Antennas and Propagation* **58**, 2112–2115.
6. **Bao XL and Ammann MJ** (2007) Dual-band circularly polarized patch antenna with compact size and small frequency ratio. *IEEE Transactions on Antennas and Propagation* **55**, 2104–2107.
7. **Kumar S, *et al.*** (2014) Stacked dual-band circularly polarized microstrip antenna with small frequency ratio. *Microwave and Optical Technology Letters* **56**, 1933–1937.
8. **Kumar S, *et al.*** (2016) Single-feed circularly polarized stacked patch antenna with small frequency ratio for dual-band wireless applications. *International Journal of Microwave and Wireless Technologies* **8**, 1207–1213.
9. **Khanam F, *et al.*** (2012) Multiband low profile modified inverted-FL strip antenna for 5.2/5.8 GHz WLAN and 5.5 GHz WiMAX applications in laptop computer, 15th ICCIT 2012, University of Chittagong, 22–24.
10. **Ansari JA, *et al.*** (2013) Ultra-wideband co-planer microstrip patch antenna for wireless applications. *Wireless Personal Communications* **69**, 1365–1378.
11. **Thomas KG and Sreenivasan M** (2011) Wideband planar printed antenna with end-fire radiation pattern. *IET Microwaves, Antennas & Propagation* **5**(7), 831–836.
12. **Ammann MJ and Chen ZN** (2004) An asymmetrical feed arrangement for improved impedance bandwidth of planar monopole antennas. *Microwave and Optical Technology Letters* **40**, 156–158.
13. **Tong L, *et al.*** (2012) Compact UWB band-notched antenna design using interdigital capacitance loading loop resonator. *IEEE Antennas and Wireless Propagation Letters* **11**, 724–727.
14. **Peng Y and Zhang WX** (2010) Compact sub-wavelength microstrip band-reject filter based on inter-digital capacitance loaded loop resonators. *Microwave and Optical Technology Letters* **52**, 2656–2658.
15. **Lin XQ and Cui TJ** (2008) Controlling the bandwidth of split ring resonators. *IEEE Microwave and Wireless Components Letters* **18**, 245–247.
16. **Siddiqui JY, *et al.*** (2014) Compact SRR loaded UWB circular monopole antenna with frequency notch characteristics. *IEEE Transactions on Antennas and Propagation* **62**, 4015–4020.
17. **Chen CH and Yung EKN** (2011) Dual-band circularly-polarized CPW-fed slot antenna with a small frequency ratio and wide bandwidths. *IEEE Transactions on Antennas and Propagation* **59**, 1379–1384.
18. **Du S, Chu QX and Liao W** (2010) Dual-band circularly polarized stacked square microstrip antenna with small frequency ratio. *Journal of Electromagnetic Waves and Applications* **24**, 1599–1608.
19. **Wang Z, *et al.*** (2017) Dual-band dual-sense circularly polarized stacked patch antenna with a small frequency ratio for UHF RFID reader applications. *IEEE Access* **5**, 15260–15270.
20. **Forouzannezhad P, Jafargholi A and Jahanbakhshi A** (2017) Multiband compact antenna for near-field and far-field RFID and wireless portable applications. *IET Microwaves, Antennas & Propagation* **11**(4), 535–541.
21. **Das R and Yoo H** (2017) A multiband antenna associating wireless monitoring and nonleaky wireless power transfer system for biomedical implants. *IEEE Transactions on Microwave Theory and Techniques* **65**(7), 2485–2495.
22. **Mao CX, *et al.*** (2017) A novel multiband directional antenna for wireless communications. *IEEE Antennas and Wireless Propagation Letters* **16**, 1217–1220.
23. **Aguilar HJ, *et al.*** (2015) Multiband–multislot planar antenna based on small loop-radiator. *Journal of Electromagnetic Waves and Applications* **29**, 2066–2079.
24. **Kumar G and Ray KP** (2003) *Broadband Microstrip Antennas*. USA: Artech House.
25. **Balanis CA** (2005) *Antenna Theory: Analysis and Design*, 3rd edn., Hoboken, NJ: John Wiley.



Praveen Chaurasia received his B.E. degree in Electronics and Communication in 2010 from RGPV, Bhopal, India, and M.Tech. degree in Electronics and Communication in 2013 from Malaviya National Institute of Technology, Jaipur, India. Currently, he is pursuing Ph.D. from IIT(ISM), Dhanbad, India. He has published 2 research papers in reputed international journal and conference. His current research interests are on multiband microstrip antenna, microstrip antenna with engineered material like meta-material and microwave components.



Binod Kumar Kanaujia is currently working as Professor in the School of Computational and Integrative Science, Jawaharlal Nehru University, Delhi-110067, India since 01-Aug-2016. Previously Dr. Kanaujia was working as a Professor in the Department of Electronics & Communication Engineering in Ambedkar Institute of Advanced Communication Technologies & Research (formerly Ambedkar Institute of Technology), Geeta Colony, Delhi from 17-Aug-2012. Dr. Kanaujia joined this institute as Assistant Professor in 2008 through selection by Union Public Service Commission, New Delhi, India and promoted to Associate Professor on 21-Feb-2008. He served on various key portfolios i.e. Head of Department, In-charge Central Library, Head of Office, etc. Before joining this institute, he had served in the M.J.P. Rohilkhand University, Bareilly, India as Reader in the Department of Electronics & Communication Engineering and also as Head of the Department. He has been an active member of Academic Council and Executive Council of the M.J.P. Rohilkhand University and played a vital role in academic reforms. Prior, to his career in academics, Dr. Kanaujia had worked as Executive Engineer in the R&D division of M/s UPTRON India Ltd. Dr. Kanaujia had completed his B.Tech in Electronics Engineering from KNIT Sultanpur, India in 1994. He did his M.Tech and Ph.D. in 1998 and 2004; respectively from Department of Electronics Engineering, Indian Institute of Technology Banaras Hindu University, Varanasi, India. He has been awarded Junior Research Fellowship by UGC Delhi in the year 2001-02 for his outstanding work in the electronics field. He has a keen research interest in design and modeling of the microstrip antenna, dielectric resonator antenna, left-handed metamaterial microstrip antenna, shorted microstrip antenna, ultra-wideband antennas, reconfigurable and circular polarized antenna for wireless communication. He has been credited to publish more than 200 research papers with more than 900 citations with h-index of 15 in peer-reviewed journals and conferences. He had supervised 50 M.Tech and 15 Ph.D. research scholars

https://doi.org/10.1017/S1759078718000570 Published online by Cambridge University Press

in the field of microwave engineering. He is a reviewer of several journals of international repute i.e. IET Microwaves, Antennas & Propagation, IEEE Antennas and Wireless Propagation Letters, Wireless Personal Communications, Journal of Electromagnetic Wave and Application, Indian Journal of Radio and Space Physics, IETE Technical Review, International Journal of Electronics, International Journal of Engineering Science, IEEE Transactions on Antennas and Propagation, AEU-International Journal of Electronics and Communication, International Journal of Microwave and Wireless Technologies, etc. Dr. Kanaujia had successfully executed 04 research projects sponsored by several agencies of Government of India i.e. DRDO, DST, AICTE and ISRO. He is also a member of several academic and professional bodies i.e. IEEE, Institution of Engineers (India), Indian Society for Technical Education and The Institute of Electronics and Telecommunication Engineers of India.



Santanu Dwari was born in Howrah, West Bengal, India. He received his B.Tech and M.Tech degree in Radio Physics and Electronics from University of Calcutta, Kolkata, West Bengal, India in the year of 2000 and 2002 respectively and Ph.D. degree from Indian Institute of Technology, Kharagpur, West Bengal, India in the year of 2009. He joined Indian School of Mines, Dhanbad, Jharkhand, India in 2008 where he is currently an Assistant Professor in the Department of Electronics Engineering. He has published seven research papers in referred International Journals. He is carrying out two sponsored research projects as Principal Investigator. His research interest includes Antennas, RF planar circuits, Computational Electromagnetics.



Mukesh Kumar Khandelwal was born in Uttar Pradesh, India and received his B.Tech. degree in Electronics & Communication Engineering, M.Tech degree in Digital Communication from GGSIP University, Delhi, India and Ph.D Degree in Electronics Engineering from Indian Institute of Technology ISM, Dhanbad, India. Dr. Khandelwal is working as an Associate Professor in the Department of Electronics & Communication Engineering, Bhagwan Parshuram Institute of Technology, Delhi India which is affiliated to Guru Gobind Singh Indraprastha University Delhi India (Govt of NCT Delhi, India). He has published Twenty Five research papers in referred International Journals. Dr. Khandelwal is serving as a reviewer in various renowned journals i.e. IEEE MTTs (USA), IEEE Access (USA), IET Microwave Antenna and Propagation(UK), IET Electronics Letters (UK), Wireless Personal Communication (Springer, Netherland), International Journal of Electronics and Communications, (Elsevier), Journal of Electromagnetic Waves and Applications, Taylor & Francis (UK) etc. His current research interests focus on microstrip antennas, metamaterials, 5-G antennas, UWB antennas, rectennas, reconfigurable antennas, multiband antennas, circularly polarized antennas, antenna array, defected ground structure and microwave components.

https://doi.org/10.1017/S1759078718000570 Published online by Cambridge University Press