Journal of Glaciology (2017), **63**(239) 565–567 doi: 10.1017/jog.2017.11
© The Author(s) 2017. This is an Open Access article, distributed under the terms of the Creative Commons Attribution licence (http://creativecommons.org/licenses/by/4.0/), which permits unrestricted re-use, distribution, and reproduction in any medium, provided the original work is properly cited.

Letter

Assessing mass balance with the cone penetration test

This letter briefly outlines why a friction-sleeve-equipped cone penetrometer may be a useful tool for assessing surface mass balance of polar ice masses.

Mass balance is defined as 'the change in the mass of a glacier, or part of the glacier, over a stated span of time' (Cogley and others, 2011). Historically, glaciological mass balance was assessed using repeat surface measurements of a stake network where temporal changes in ablation or accumulation were recorded (Ostrem and Brugman, 1991). Today, this role is increasingly performed over large spatial scales using geodetic methods. Satellites such as ICESat, CryoSat II and GRACE use various methods to calculate ice mass volumetric change over time (Shepherd and others, 2012). However, empirical surface mass-balance assessment is still necessary to 'ground-truth' and constrain models that utilise satellite-derived geodetic mass-balance data.

Methods that can be used to assess mass balance include: ablation and accumulation measurements using stakes; static ultrasonic depth sensors; avalanche probes (for shallow assessment); snow pits; the 'coffee-can' method (Hamilton and others, 1998); borehole techniques such as the neutron probe or borehole optical stratigraphy (Hawley and Morris, 2006); and by assessing extracted cores with instruments such as the MABLE (mostly automated borehole logging experiment) (Breton and Hamilton, 2012). Ground Penetrating Radar (GPR) can also be used for approximate estimation over large spatial scales, but, although snow density assessment using GPR data is possible (McCallum, 2014c) poor interface detection can hinder interpretation (Hubbard and Glasser, 2005). While all of these methods have been shown to be effective, empirical means by which surface mass-balance changes can be easily and rapidly assessed over large spatial areas are needed. A friction-sleeve-equipped penetrometer may address this deficiency.

McCallum (2014b) described the first use of a friction-sleeve-equipped hydraulically driven cone penetrometer, the Cone Penetration Test (CPT) in Antarctica. It was used to penetrate snow and ice layers with strength of up to 40 MPa, to depths of 10 m. Further work described methods by which snow density, relative microstructure and strength can all be estimated using data obtained from the friction-sleeve-equipped penetrometer (McCallum, 2014a; McCallum, 2014c).

This letter briefly outlines why repeated use of a friction-sleeve-equipped cone penetrometer may be useful for assessing surface mass balance of glaciers and ice sheets.

ASSESSMENT OF MASS BALANCE

To determine mass balance, changes in glacial mass must be assessed over time: mass can be calculated by knowing both density and volume; and unit volume can be determined by measuring depth. Therefore, to determine ice mass at a particular time, the density and thickness of a specific layer must be determined.

The CPT involves hydraulically forcing a 60° cone of 35.7 mm diameter into the ground at a standard rate of 20 mm s^{-1}. Sufficient reaction to penetration resistance is provided by the CPT equipment that is typically tractor-mounted (Fig. 1).

The cone tip is sensitive to harder or softer layers. Tip resistance (MPa) can be recorded and displayed and layer interfaces can be identified to a resolution of ~25 mm (McCallum, 2014a) (Fig. 2).

McCallum (2014b) describes this method in detail. Smaller penetrometers allow higher layer-interface resolution and can be used for density assessment (Schneebeli and others, 1999; Proksch and others, 2015), but they are unable to penetrate to depths below ~1 m in hard polar snow. Penetration to greater depths using the CPT may allow multi-year accumulation records to be assessed.

In addition to a cone tip, the cone used in the CPT is also uniquely equipped with a friction sleeve. Studies in Greenland (McCallum and Looijen, 2017) and Antarctica (McCallum (2014b) and McCallum (2016)) have examined the relationship between CPT sleeve friction and snow density and a positive *qualitative* correlation is evident (Fig. 3).

This probably occurs because as snow density increases: (i) the normal force on the cone will increase because of increased mass compacted within a semiconstant volume; and (ii) the friction coefficient will increase because of increased cone/ice contact area.

McCallum and Looijen (2017), discussing friction-sleeve-equipped mini penetrometer data from Greenland, also suggested that a *quantitative* relationship existed between penetrometer sleeve friction and snow density. However, because no additional CPT friction-sleeve data for snow exist, definitive quantitative analysis is not currently possible (McCallum, 2016).

In summary, a *qualitative* relationship between sleeve friction and snow density is readily observed and a *quantitative* relationship is likely.

CONCLUSION

Mass-balance assessment of glaciers and ice sheets is crucial to constrain ice mass models. However, existing techniques do not enable efficient point assessment to depths >1 m in hard polar snow. The CPT has the potential to offer a simple and robust method that can be easily repeated over time to enable mass balance to be determined.

It is likely that a quantitative relationship exists between CPT sleeve-friction data and snow density that can be applied to depths of 5–10 m in polar snow. However, only one field campaign has been conducted with this friction-sleeve-equipped penetrometer (McCallum, 2014b) and additional controlled field or laboratory testing is necessary to refine this relationship.

CPT data presented herein were collected using heavy equipment (Fig. 1). However, a lightweight modular CPT system that can be transported by Twin Otter or equivalent aircraft and towed by a snowmobile is currently being constructed. This should enable the rapid acquisition of surface

https://doi.org/10.1017/jog.2017.11 Published online by Cambridge University Press



Fig. 1. Tractor-mounted CPT equipment used at Halley V Research Station, Antarctica, 2009/10. Insets show: a rigid steel link (~100 mm outside diameter) that can be engaged to enable additional reaction force from the ~20 tonne tractor, and hydraulic rams and data collection equipment (from McCallum (2014b)).

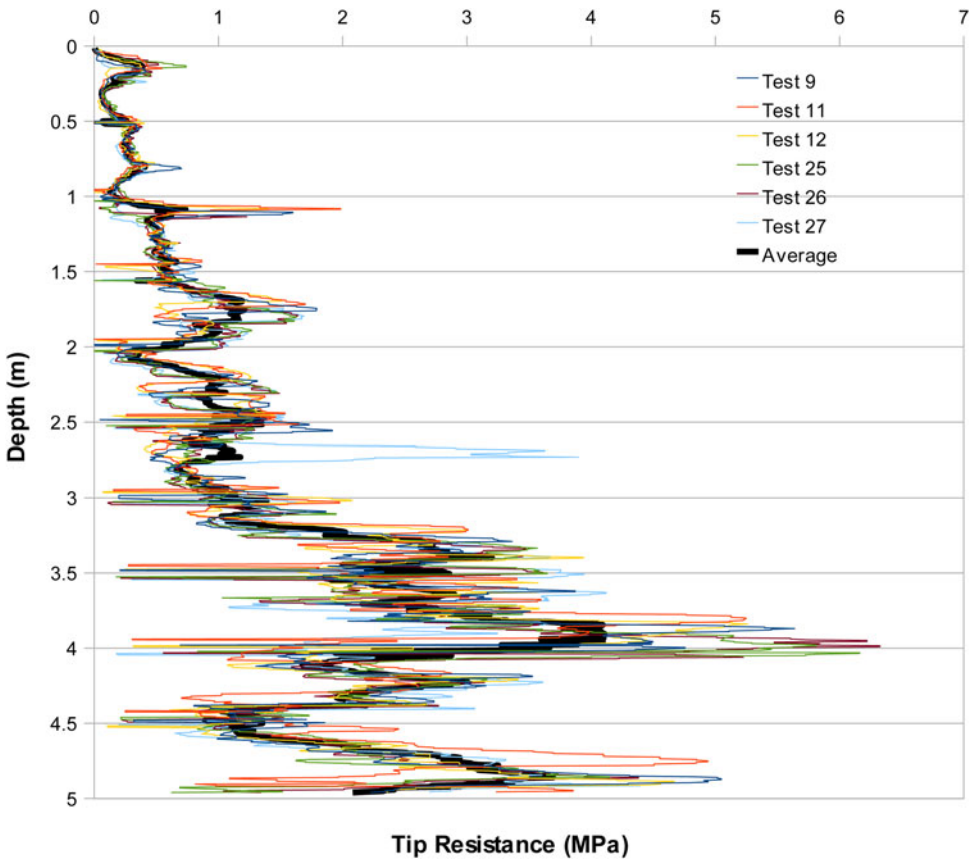


Fig. 2. Tip resistance (MPa) for six individual tests to a depth of 5 m is shown along with an average value. Negative spikes apparent every 0.5 m occur when penetration was stopped to change rods; these spikes are generally removed in post-acquisition data-processing. The cone responds to harder and softer layers; layer interfaces can be identified to a resolution of ~25 mm. Data were collected on the Brunt Ice Shelf in the vicinity of Halley V Research Station in 2010.

https://doi.org/10.1017/jog.2017.11 Published online by Cambridge University Press

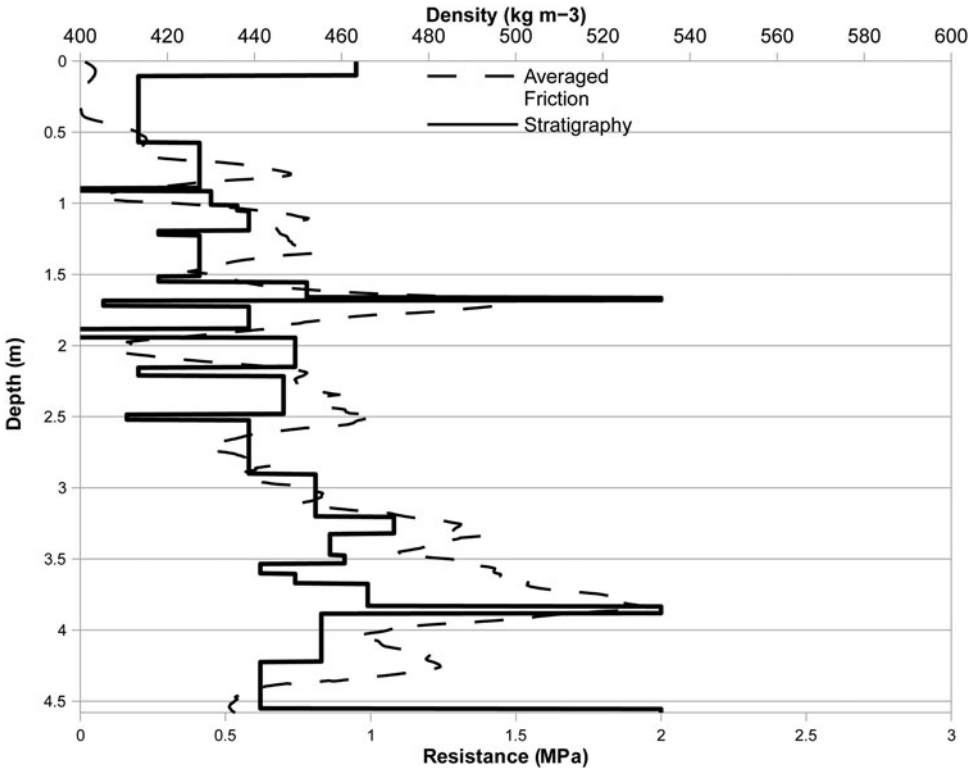


Fig. 3. Comparison of sleeve friction, averaged over friction-sleeve length and normalised for comparison purposes, with gravimetrically-determined snow density. In this figure, additional stress due to overburden has been subtracted from friction-sleeve data. Data were collected on the Brunt Ice Shelf in the vicinity of Halley V Research Station in 2010.

mass-balance data from remote polar and accessible alpine ice masses. Moreover, CPT can be conducted with additional commercially-proven in-line sensors such as a resistivity module or a video module to enable comprehensive assessment of snowpack properties during a single test.

ACKNOWLEDGEMENTS

This letter introducing the application of the CPT for the assessment of glacial mass balance was suggested by Martin Schneebeli, SLF. Advice from the Chief Editor, Journal of Glaciology and two reviewers has significantly improved this letter; their contributions are greatly appreciated.

Faculty of Science, Health, Education and Engineering, University of the Sunshine Coast, Sippy Downs, Australia

ADRIAN MCCALLUM

E-mail: Adrian McCallum <amccallu@usc.edu.au>>

REFERENCES

Breton DJ and Hamilton GS (2012) *Travels with MADGE and MABEL: near-situ and in-situ investigations of firn at Titan Dome*, Antarctica, Abstract C13G-06 presented at 2012 Fall Meeting, AGU, San Francisco, Calif., 3–7 December.

Cogley JG and 10 others (2011) *Glossary of glacier mass balance and related terms, Technical Report*, IHP-VII Technical Documents in Hydrology No. 86, IACS Contribution No. 2, UNESCO-IHP, Paris.

Hamilton GS, Whillans IM and Morgan PJ (1998) First point measurements of ice-sheet thickness change in Antarctica. *Ann. Glaciol.*, **27**, 125–129.

Hawley RL and Morris EM (2006) Borehole optical stratigraphy and neutron-scattering density measurements at Summit, Greenland. *J. Glaciol.*, **52**(179), 491–496.

Hubbard B and Glasser N (2005) *Field techniques in glaciology and glacial geomorphology*. John Wiley & Sons, Ltd, Chichester.

McCallum AB (2014a) A brief introduction to cone penetration testing (CPT) in frozen geomaterials. *Ann. Glaciol.*, **55**(68), 7–14.

McCallum AB (2014b) Cone penetration testing (CPT) in Antarctic firn: an introduction to interpretation. *J. Glaciol.*, **60**(219), 83–93.

McCallum AB (2014c) Direct estimation of snow density from CPT. In Robertson P. K. and Cabal K. I. eds, 3rd. *International symposium on cone penetration testing*. ISSMGE Technical Committee TC 102, Las Vegas.

McCallum AB (2016) On the relationship between CPT sleeve-friction and snow density. *Aust. Geomech. J.*, **51**(2), 29–33.

McCallum AB and Looijen P (2017) Preliminary assessment of a friction-sleeve equipped mini penetrometer. *J. Cold Regions Eng.* (doi: 10.1061/(ASCE)CR.1943-5495.0000122).

Ostrem G and Brugman M (1991) *Glacier mass-balance measurements*. A manual for field and office work., *NHRI Science Report 4*, National Hydrology Research Institute, Environment Canada, Saskatoon, Sask.

Proksch M, Lowe H and Schneebeli M (2015) Density, specific surface area and correlation length of snow measured by high resolution penetrometry. *J. Geophys. Res.: Earth Surf.*, **120**, 1.

Schneebeli M, Pielmeier C and Johnson JB (1999) Measuring snow microstructure and hardness using a high resolution penetrometer. *Cold Regions Sci. Technol.*, **30**(1–3), 101.

Shepherd A and 45 others (2012) A reconciled estimate of ice-sheet mass balance. *Science*, **338**(6111), 1183–1189.

MS received 11 October 2016 and accepted in revised form 13 February 2017; first published online 9 March 2017

https://doi.org/10.1017/jog.2017.11 Published online by Cambridge University Press