J. Fluid Mech. (2013), *vol.* 733, *pp.* 681–683. © Cambridge University Press 2013
doi:10.1017/jfm.2013.468

Non-normality in combustion–acoustic interaction in diffusion flames: a critical revision

Luca Magri[1],†, K. Balasubramanian[2], R. I. Sujith[3] and M. P. Juniper[1]

[1]Department of Engineering, University of Cambridge, Trumpington Street, Cambridge CB2 1PZ, UK

[2]C. N. Yang Institute for Theoretical Physics, State University of New York, Stony Brook, NY 11794-3840, USA

[3]Department of Aerospace Engineering, Indian Institute of Technology Madras, Chennai 600036, Tamil Nadu, India

(Received 24 June 2013; revised 26 July 2013; accepted 2 August 2013; first published online 1 October 2013)

Perturbations in a non-normal system can grow transiently even if the system is linearly stable. If this transient growth is sufficiently large, it can trigger self-sustained oscillations from small initial disturbances. This has important practical consequences for combustion–acoustic oscillations, which are a persistent problem in rocket and aircraft engines. Balasubramanian & Sujith (*J. Fluid Mech.*, vol. 594, 2008, pp. 29–57) modelled an infinite-rate chemistry diffusion flame in an acoustic duct and found that the transient growth in this system can amplify the initial energy by a factor, G_{max}, of the order of 10^5 to 10^7. However, recent investigations by L. Magri and M. P. Juniper have brought to light certain errors in that paper. When the errors are corrected, G_{max} is found to be of the order of 1 to 10, revealing that non-normality is not as influential as it was thought to be.

Key words: Acoustics, Combustion, Flames

1. Results and discussion

Recent investigations have brought to light certain errors in Balasubramanian & Sujith (2008, labelled B&S in this note). We use the same model, discretization and non-dimensionalization as in B&S. The required corrections to B&S are listed below.

(*a*) The analytical steady solution, Z_{st} (appendix B, p. 54), obtained by separation of variables, is

$$Z_{st} = X_i(1-\alpha) - Y_i\alpha - \frac{2}{\pi}(X_i + Y_i)\sum_{n=1}^{+\infty}\frac{\sin(n\pi\alpha)}{n(1+b_n)}\cos(n\pi y_c)(\mathrm{e}^{a_{n1}x_c} + b_n\mathrm{e}^{a_{n2}x_c}), \quad (1.1)$$

where

$$a_{n1} \equiv \frac{Pe}{2} - \sqrt{\frac{Pe^2}{4} + n^2\pi^2}, \quad a_{n2} \equiv \frac{Pe}{2} + \sqrt{\frac{Pe^2}{4} + n^2\pi^2}, \quad (1.2)$$

$$b_n \equiv -\frac{a_{n1}}{a_{n2}}\exp\left(-2L_c\sqrt{\frac{Pe^2}{4} + n^2\pi^2}\right). \quad (1.3)$$

† Email address for correspondence: lm547@cam.ac.uk

https://doi.org/10.1017/jfm.2013.468 Published online by Cambridge University Press

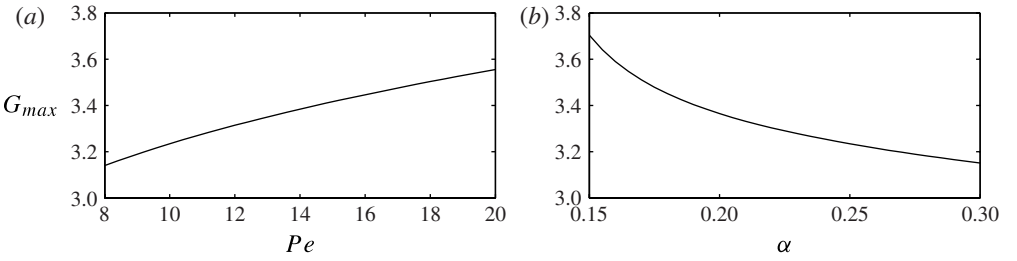


FIGURE 1. The growth factor, G_{max}, as a function of (a) the Péclet number, Pe, and (b) the fuel slot half-width, α. Panel (a) has $\alpha = 0.25$, and (b) has $Pe = 10$.

The non-dimensional coordinates of the combustion domain are x_c and y_c.

(b) The expressions for $C_m^{(n)}$ and W_{mk} (equation (7), p. 36) are $2/L_c$ times the original terms, due to the Galerkin projection. Furthermore, $W_{mk} = 1/L_c$ when $k = m$.

(c) The variable Y_1 on the right-hand side of the terms R_{nm} and J_{nm} (equation (13), p. 37) is Y_i.

(d) The variable $\dot{Q}_{av}$ (equations (18) and (19), p. 39) is to be divided by 2 due to non-dimensionalization over the cross-sectional area.

(e) The multiplying factor in front of matrix $\boldsymbol{M}_1$ (appendix B, p. 54) is $1/((T_i + T_{ad})/2)$.

(f) The expression for matrix $\boldsymbol{B}_{NN}$ (appendix B, p. 54) is $\boldsymbol{B}_{NN} = -\boldsymbol{D} + \boldsymbol{A}_1 - \boldsymbol{A}_2 + \boldsymbol{A}_3 - \boldsymbol{A}_4 + \boldsymbol{A}_5$, where

$$\boldsymbol{A}_5 = \frac{1}{(T_i + T_{ad})/2}[0\ 0\ 0\ \ldots\ 0\ \sin(\pi x_f)\ \sin(2\pi x_f)\ \ldots\ \sin(K\pi x_f)]^{\mathrm{T}} \times [J_{00}\ \ldots\ J_{0M}\ 0\ \ldots\ 0] \tag{1.4}$$

and K is the number of Galerkin modes for acoustic discretization.

(g) The damping terms in the matrix $\boldsymbol{S}$ (appendix B, p. 55) are $+2\pi\xi_1$, $+4\pi\xi_2$, …, $+2K\pi\xi_K$.

(h) The numerator of matrix $\boldsymbol{A}_4$ (appendix B, p. 55) is 1 due to non-dimensionalization over the cross-sectional area of the duct.

We perform computations with 50×50 Galerkin modes in the flame domain and six modes in the acoustic domain. When we increase the number of Galerkin modes to 70×70 in the flame and 12 in the acoustics, the eigenvalues and singular values change by less than 15 %. The fixed parameters are: the fuel mass ratio, $Y_i = 3.2$; the oxidizer mass ratio, $X_i = 3.2/7$; and the average temperature, $T_{av} = 1/0.685$. We set the damping coefficients to $c_1 = 0.013$ and $c_2 = 0.08$ in order to have marginally stable systems. The nonlinear behaviour of this thermo-acoustic system is not considered because it has been fully characterized by Illingworth, Waugh & Juniper (2013).

Figure 1 shows the growth factor, G_{max}, as a function of (a) the Péclet number, Pe, and (b) the non-dimensional half-width of the fuel slot, α. (Note that we use the same norm as B&S, even though Chu's norm would be a more appropriate measure of the energy (Chu 1965).) In both cases, $1 < G_{max} \lesssim 10$. These plots can be compared with figures 9 and 10 in B&S. Figure 2 shows the eigenvalues and the pseudospectra for this thermo-acoustic system. These can be compared with figure 11 in B&S. The pseudospectra around the most unstable eigenvalues are nearly concentric circles whose values decrease rapidly as the distance from the eigenvalue increases. This is a further demonstration that the system is only weakly non-normal,

https://doi.org/10.1017/jfm.2013.468 Published online by Cambridge University Press

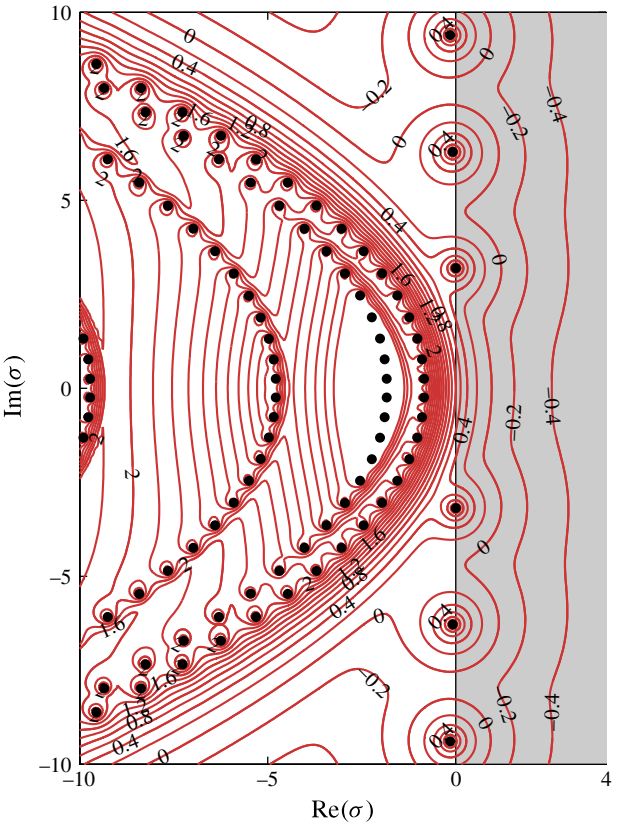


FIGURE 2. (Colour online) Logarithm of the pseudospectra, $\log_{10}(\epsilon)$. The parameters are the same as figure 1, with $\alpha = 0.25$ and $Pe = 10$. The dominant eigenvalue is $\sigma = -0.003 \pm 3.193\mathrm{i}$.

because a marginally stable but highly non-normal system would have pseudospectra that protrude significantly into the unstable half-plane (Trefethen & Embree 2005). Nevertheless, it is worth noting that Juniper (2011) showed that even a small amount of non-normality can make a system somewhat more susceptible to triggering.

Acknowledgements

L.M. and M.P.J. would like to thank I. C. Waugh for valuable discussions and A. Orchini for scrutinizing some parts of the code. This work was supported by the European Research Council through Project ALORS 2590620.

REFERENCES

BALASUBRAMANIAN, K. & SUJITH, R. I. 2008 Non-normality and nonlinearity in combustion–acoustic interaction in diffusion flames. *J. Fluid Mech.* **594**, 29–57.

CHU, B. T. 1965 On the energy transfer to small disturbances in fluid flow (Part I). *Acta Mechanica* **1** (3), 215–234.

JUNIPER, M. P. 2011 Triggering in the horizontal Rijke tube: non-normality, transient growth and bypass transition. *J. Fluid Mech.* **667**, 272–308.

ILLINGWORTH, S. J., WAUGH, I. C. & JUNIPER, M. P. 2013 Finding thermoacoustic limit cycles for a ducted Burke–Schumann flame. *Proc. Combust. Inst.* **34** (1), 911–920.

TREFETHEN, L. N. & EMBREE, M. 2005 *Spectra and Pseudospectra*. Princeton University Press.

https://doi.org/10.1017/jfm.2013.468 Published online by Cambridge University Press