J. Appl. Prob. **53,** 667–687 (2016)
*doi:*10.1017/jpr.2016.33
© *Applied Probability Trust* 2016

SENSOR ALLOCATION PROBLEMS ON THE REAL LINE

EVANGELOS KRANAKIS * AND
GENNADY SHAIKHET,** *Carleton University*

Abstract

A large number n of sensors (finite connected intervals) are placed randomly on the real line so that the distances between the consecutive midpoints are independent random variables with expectation inversely proportional to n. In this work we address two fundamental sensor allocation problems. The interference problem tries to reallocate the sensors from their initial positions to eliminate overlaps. The coverage problem, on the other hand, allows overlaps, but tries to eliminate uncovered spaces between the originally placed sensors. Both problems seek to minimize the total sensor movement while reaching their respective goals. Using tools from queueing theory, Skorokhod reflections, and weak convergence, we investigate asymptotic behaviour of optimal costs as n increases to ∞. The introduced methodology is then used to address a more complicated, modified coverage problem, in which the overlaps between any two sensors can not exceed a certain parameter.

Keywords: Sensor allocation; queueing theory; potential outflow; reflected random walk; Skorokhod map; weak convergence

2010 Mathematics Subject Classification: Primary 60J20
Secondary 68M20

1. Introduction

A large number n of sensors are distributed over the positive half-line. Each sensor is represented by a finite closed interval of the same length σ^n, and the distances between consecutive midpoints are independent and identically distributed (i.i.d.) random variables with expectation $1/n$. An arbitrary realization will possibly have some overlapping sensors, as well as sensors with gaps between them. The *coverage* and *interference* problems aim to *reallocate the sensors in an optimal way* to either eliminate the overlaps (interference problem) or rather to remove the gaps, securing uninterrupted coverage starting from the origin (coverage problem). In both problems the optimality criteria are chosen to be minimization of the total movement of sensors.

In this paper we consider both problems in the asymptotic setting where the number of sensors (n) increases to ∞ and the length σ^n becomes infinitely small, roughly inversely proportional to n. Our main goal at this stage is *not to solve* the coverage or interference problems, but to *understand* orders of magnitude for optimal allocation costs and their dependence on the limiting behaviour of σ^n. The results are of particular importance in computer science, communications, and networking; and later may be used as a starting point for finding an optimal solution. To the best of the authors' knowledge, such an asymptotic setting has yet to

Received 19 May 2015; revision received 20 November 2015.
* Postal address: School of Computer Science, Carleton University, 1125 Colonel By Drive, Ottawa, ON, K1S 5B6, Canada. Email address: kranakis@scs.carleton.ca
** Postal address: School of Mathematics and Statistics, Carleton University, 1125 Colonel By Drive, Ottawa, ON, H1S 5B6, Canada. Email address: gennady@math.carleton.ca

https://doi.org/10.1017/jpr.2016.33 Published online by Cambridge University Press

be fully studied. Some initial results appear in the conference proceedings ([9], interference) and ([10], coverage) treating the special cases when the i.i.d. distances between sensor midpoints are either exponential [9] or uniform [10]. In both papers the authors studied performance bounds for some allocation algorithms, mostly using *straightforward* computations. The methods had their limitations—not all choices of σ^n could be treated, and the bounds were mostly one-sided. Besides, no coherent connection was established between the coverage and interference problems.

In what follows we introduce a unifying methodology to address both problems simultaneously. The spectrum of all values for the sensor length σ^n is decomposed into three different regions (or categories), characterized by whether the length is asymptotically greater than, less than or equal to the average original distance of $1/n$ between consecutive sensors' midpoints. The three categories will be referred to as *overloaded*, *underloaded*, or *critical*; and each will produce distinct two-sided estimates for both coverage and interference optimal costs. The terminology clearly suggests an analogy with *queueing theory* and, indeed, quite a bit of it will be used. In particular, we use the so-called *potential outflow* function (3.1) and related functionals. Our main findings are summarized in Theorem 2.1. It is shown that the two costs behave quite the opposite in the underloaded and overloaded cases, while exhibiting the same order of magnitude in the critical case.

The resulting table may seem intuitive or even simple (we prefer *elegant*), yet the situation was far from being that clear before the 'queueing link' had been established. In fact, the orders of O(1) were not expected, for the *coverage* problem in particular. There, a certain Skorokhod reflection map (6.3) had to be introduced (the result may be of separate interest in queueing theory as it can be used for analyzing busy periods in G/D/∞ models). In addition, to show the *almost sure* relation we could no longer rely on the methodology of asymptotic queueing analysis (very valuable to establish the tightness, for example). Instead, we had to bound the reflection map by a certain discrete-time, continuous-space Markov chain in the spirit of [13], making it possible to apply the classical 'law of large numbers for Markov chains'.

The new methods are then exploited to study a more complicated, *mixed* problem (see (2.3) for the formulation, and Theorem 2.2). Once again, the O(1) estimates were the most difficult to show, requiring a modified version (8.2) of the previously introduced Skorokhod map. After that, the map (8.2) had to be bounded from both sides by reflected random walks, amenable to analysis. Overall, we believe that our methodology is robust, and can be applied to various related questions.

Related literature. Both coverage and interference problems have been studied before. Huang and Tseng [6] dealt with covering of a two-dimensional domain by sensors. A specific and more efficient type of coverage is called *barrier coverage* and concerns covering the perimeter of a two-dimensional object. For the barrier coverage problem the authors of [11] proposed efficient algorithms to determine, after deploying the sensors, whether a region is k-barrier covered. For the problem of coverage on a line, the authors of [5] considered the complexity of the (total) displacement problem on a line and proposed deterministic algorithms; similarly, the same authors in [4] analyzed the complexity of the maximum displacement problem on a line and proposed deterministic algorithms.

Interference in a network may be caused by node transmission power and proximity and affects the overall communication connectivity. In [2] the authors proposed connectivity-preserving and spanner constructions that are interference-minimal, while in [14] they studied the problem of minimizing the average interference while still maintaining desired network properties, such as connectivity, point-to-point connections, or multicast trees.

https://doi.org/10.1017/jpr.2016.33 Published online by Cambridge University Press

Notation. We use $\mathcal{L}\{[a,b]\} = b-a$ for the length of the interval $[a,b]$ on the real line. For $x, y \in \mathbb{R}$, we use $x \wedge y = \min\{x,y\}$ and $x \vee y = \max\{x,y\}$. We also use $x^+ = x \vee 0$ and $x^- = -(x \wedge 0)$ for positive and negative parts of $x \in \mathbb{R}$, respectively. For a vector $a \in \mathbb{R}^n$, we use $\|a\| = \sum_{k=1}^n |a_k|$. For a function $f(\cdot)$ on $\mathbb{R}$ we use $f(u-) = \lim_{t\uparrow u} f(t)$ to denote a left-hand limit of f at point u.

For positive sequences $\{x_n,\ n \geq 1\}$ and $\{y_n,\ n \geq 1\}$, we say that $x_n \in \Theta(y_n)$ if there exist two constants $c_1 > 0$ and $c_2 > 0$, independent of n, such that $c_1 y_n \leq x_n \leq c_2 y_n$ for all large enough n. In addition, we say $x_n \in \mathrm{O}(y_n)$ (respectively $x_n \in \Omega(y_n)$) if there exists a constant $c > 0$ such that $x_n \leq c y_n$ (respectively $c y_n \leq x_n$) for large enough n.

2. Setting and the main results

The n sensors are represented by n finite closed intervals $[\tau_i^n, \tau_i^n + \sigma^n]$, $1 \leq i \leq n$, where we use τ_i^n for the left endpoint of the ith sensor; and σ^n for its length. All sensors have the same length σ^n. The model is parameterized by $n \in \mathbb{N}$, the number of sensors under consideration. We start with a basic assumption.

Assumption 2.1. *For a given $n \in \mathbb{N}$, the left endpoints $\{\tau_i^n\}_{i=1}^n$ satisfy $\tau_1^n = \zeta_1/n$ and $\tau_i^n - \tau_{i-1}^n = \zeta_i/n$, $2 \leq i \leq n$, where $\{\zeta_i\}_{i\geq 1}$ are i.i.d. positive, absolutely continuous random variables with $\mathbb{E}(\zeta_1) = 1$ and $\mathbb{E}(\zeta_1^2) < \infty$. See Figure 1.*

2.1. Interference and coverage problems

This paper is concerned with allocating (or, better, reallocating) the sensors along the positive real half-line to achieve certain properties. A set $\pi^n = \{\pi_i^n\}_{i=1}^n \in \mathbb{R}^n$ will be called a *displacement policy*, each $\pi_i^n \in \mathbb{R}$ being a displacement of the ith sensor from its *original* location $[\tau_i^n, \tau_i^n + \sigma^n]$ to a new location $[\tau_i^n - \pi_i^n, \tau_i^n - \pi_i^n + \sigma^n]$. The sensors must not exit the half-line, thus requiring $\pi_i^n \leq \tau_i^n$. For a policy π^n, we let $\|\pi^n\| = \sum_{i=1}^n |\pi_i^n|$ represent the total *displacement cost*.

Problem 2.1. (*Interference.*) Minimize the total displacement cost needed to eliminate overlaps between the sensors; that is, find

$$C_{\mathrm{int}}^n = \min_{\pi^n \in \Pi_1^n} \|\pi^n\|, \tag{2.1}$$

where $\pi^n \in \Pi_1^n$, if $(\tau_i^n - \pi_i^n, \tau_i^n - \pi_i^n + \sigma^n) \cap (\tau_j^n - \pi_j^n, \tau_j^n - \pi_j^n + \sigma^n) = \varnothing$ for $i \neq j$ and, in addition, $\pi_i^n \leq \tau_i^n$ for each i.

Problem 2.2. (*Coverage.*) Minimize the total displacement cost needed to eliminate gaps between the sensors; that is, find

$$C_{\mathrm{cov}}^n = \min_{\pi^n \in \Pi_2^n} \|\pi^n\|, \tag{2.2}$$

where $\pi^n \in \Pi_2^n$, if $\bigcup_{i=1}^n [\tau_i^n - \pi_i^n, \tau_i^n - \pi_i^n + \sigma^n] = [0, \max_{i=1,\ldots,n}\{\tau_i^n - \pi_i^n + \sigma^n\}]$.

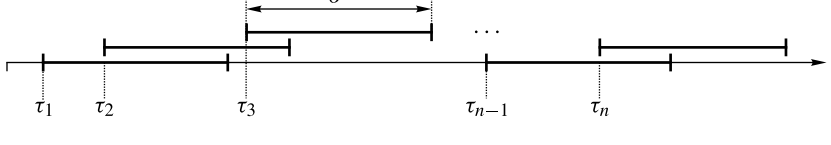


FIGURE 1: Sensors (without superscripts, and lifted above each other to clarify the exposition).

https://doi.org/10.1017/jpr.2016.33 Published online by Cambridge University Press

The main objective of this paper is to understand the large n asymptotics of the cost of total movement. It appears that the results strongly depend on whether the sensor length σ^n is greater than, less than, or asymptotically (as parameter $n \uparrow \infty$) equal to the average distance of $1/n$ between initially placed sensors.

Assumption 2.2. *The sensor length σ^n is deterministic and satisfies*

$$\alpha_\sigma := \lim_{n\to\infty} \frac{\sigma^n}{1/n} = \lim_{n\to\infty} n\sigma^n < \infty.$$

Definition 2.1. The set of sensors is of type U (underloaded) if $\alpha_\sigma < 1$; of type O (overloaded) if $\alpha_\sigma > 1$; of type C (critical) if $\alpha_\sigma = 1$ and $\lim_{n\to\infty} \sqrt{n}(n\sigma^n - 1) \in (-\infty, \infty)$.

Theorem 2.1. (Interference and coverage.) *Let Assumptions 2.1 and 2.2 hold. In Table 1 we summarize the asymptotics (as $n \to \infty$) of the cost of optimal displacement for (2.1) and (2.2) for each type of sensor set.*

Theorem 2.1 is proven in several stages over the next five sections. Section 3 deals with some necessary prerequisites. The interference problem is treated in Sections 4 and 5: we introduce certain lower and upper bounds (Section 4), and analyze them asymptotically afterwards (Section 5). Similarly, the coverage problem is treated in Sections 6 and 7. In the concluding section, Section 10, we discuss possible alternatives to the characterization (Definition 2.1) of limiting regimes.

2.2. Mixed problem

We introduce a modification of the *coverage problem*. Let r^n be a deterministic sequence of positive numbers with $r^n \le \sigma^n$, and assume the existence of the limit

$$\alpha_r := \lim_{n\to\infty} nr^n < \infty.$$

Problem 2.3. (*Mixed problem.*) Minimize the total displacement cost needed to eliminate gaps between the sensors, with an additional requirement that no two sensors can overlap by more than r^n; that is, we seek

$$C^n_{\text{mix}} = \min_{\Pi^n_2 \cap \Pi^n_3} \|\pi^n\|, \tag{2.3}$$

where $\pi^n \in \Pi^n_3$, if $\mathcal{L}\{[\tau^n_i - \pi^n_i, \tau^n_i - \pi^n_i + \sigma^n] \cap [\tau^n_j - \pi^n_j, \tau^n_j - \pi^n_j + \sigma^n]\} \le r^n$, $i \ne j$.

For the mixed problem, we will show that the *coverage* results of Theorem 2.1 remain the same for underloaded and critical sensor sets. On the other hand, when the sensor set is overloaded, the results will depend on the asymptotic behaviour of the difference $\sigma^n - r^n$.

Definition 2.2. Recall Definition 2.1. A sensor set of type O (overloaded) is said to be of type $\text{O}^{(u)}$ if $\alpha_\sigma - \alpha_r < 1$; of type $\text{O}^{(o)}$ if $\alpha_\sigma - \alpha_r > 1$; of type $\text{O}^{(c)}$ if $\alpha_\sigma - \alpha_r = 1$ and $\lim_{n\to\infty} \sqrt{n}(n\sigma^n - nr^n - 1) \in (-\infty, \infty)$.

TABLE 1: Asymptotics of the optimal displacement for (2.1) and (2.2).

Regime	Interference C^n_{int}	Coverage C^n_{cov}	Result holds in
U	$\text{O}(1)$	$\Theta(n)$	Expectation/almost surely (a.s.)
C	$\Theta(n^{1/2})$	$\Theta(n^{1/2})$	Expectation
O	$\Theta(n)$	$\text{O}(1)$	Expectation/a.s.

https://doi.org/10.1017/jpr.2016.33 Published online by Cambridge University Press

TABLE 2: Asymptotics of C^n_{mix}.

Regimes	Mixed C^n_{mix}	Result holds in
U, $\text{O}^{(o)}$	$\Theta(n)$	Expectation/a.s.
C, $\text{O}^{(c)}$	$\Theta(n^{1/2})$	Expectation
$\text{O}^{(u)}$	$\text{O}(1)$	Expectation/a.s.

Theorem 2.2. (Mixed problem.) *Let Assumptions 2.1 and 2.2 hold. In Table 2 we summarize the asymptotics of C^n_{mix} for each type of sensor set.*

Since all five categories U, C, $\text{O}^{(o)}$, $\text{O}^{(u)}$, and $\text{O}^{(c)}$ are disjoint, from Table 2 we see that the $\Theta(n)$ estimate, for example, holds for both types U and $\text{O}^{(o)}$; and so on. The theorem is treated in Sections 8 and 9. Once again, some bounds are introduced and then analyzed asymptotically. To some extent the mixed problem resembles the coverage problem.

3. Preliminary analysis

3.1. Potential outflow. Connection to queueing theory

The *potential outflow* of a counting process $N^n(t) := \sum_{i=1}^n \mathbf{1}_{\{\tau_i^n \le t\}}$, for $0 \le t \le \tau^n$, is defined as

$$W^n(t) = \sigma^n N^n(t) - t, \qquad 0 \le t \le \tau^n \tag{3.1}$$

The notion comes from the G/D/1 queueing theory: the left endpoints $\{\tau_i^n\}$ represent arrival epochs with *generally* distributed interarrival times (so that N^n becomes an *arrival* process), and the sensor's length σ^n stands for *deterministic* service requirements. The potential outflow W^n will play a key role in the construction and analysis of various displacement policies. Equation (3.1) implies that (pay attention to the left-hand limit)

$$W^n(\tau_k^n-) = (k-1)\sigma^n - \tau_k^n, \qquad 1 \le k \le n. \tag{3.2}$$

3.2. Base coverage policy

Introduce a policy $\pi^n = \{\pi_k^n\}_{k=1}^n$ satisfying $\pi_k^n = -W^n(\tau_k^n-) = \tau_k^n - (k-1)\sigma^n$, which trivially places the kth sensor in the interval $[(k-1)\sigma^n, k\sigma^n]$ for each $k = 1, \dots, n$. The base coverage policy is clearly admissible for each of the problems (2.1), (2.2), and (2.3), and can be used as an upper bound for either C^n_{int}, C^n_{cov}, or C^n_{mix}; that is,

$$C^n_{\text{int/cov/mix}} \le \sum_{k=1}^n |W^n(\tau_k^n-)|. \tag{3.3}$$

3.3. Ordered policies

In the sequel, we will restrict the policy sets Π_1^n, Π_2^n, Π_3^n to policies satisfying (3.4), allowing us to contain only the *ordered* (that is, according to their initial order) displacement of sensors. The claim is justified in Lemma 3.1 below, whose simple proof is omitted. Such a reduction of the policy sets is indeed crucial and will be used later to establish a connection to queueing theory. To keep it simple, we will abuse the notation and retain the letters Π_1^n, Π_2^n, Π_3^n.

Lemma 3.1. *An optimal displacement policy for each of the problems (2.1), (2.2), and (2.3) necessarily satisfies*

$$\tau_i^n - \pi_i^n \le \tau_j^n - \pi_j^n \quad \text{for } i < j. \tag{3.4}$$

https://doi.org/10.1017/jpr.2016.33 Published online by Cambridge University Press

4. Interference problem

4.1. Characterization of a policy, and a lower bound on performance

For a given initial allocation $\{\tau_1^n, \tau_2^n, \ldots\}$ and a policy $\pi^n \in \Pi_1^n$, introduce $\{\xi\}_{i=1}^n$, recursively defined as $\xi_1 = \tau_1^n - \pi_1^n$ and

$$\xi_k = \tau_k^n - \pi_k^n - \sum_{i=1}^{k-1}(\sigma^n + \xi_i), \qquad k = 2, \ldots, n. \tag{4.1}$$

Clearly, $\xi_1 \geq 0$, and it is the distance from the origin to shifted sensor 1 (to avoid confusion, after application of the policy, each sensor i will be referred to as *reallocated* or *shifted*, even when its displacement is 0). Likewise, for each k, the quantity $\xi_k \geq 0$ represents the length of the gap between *consecutive* shifted sensors $k-1$ and k (since $\sum_{i=1}^{k-1}(\sigma^n + \xi_i)$ is the *right endpoint* of the $(k-1)$th shifted sensor). Note that the shifted sensors must be consecutive, as required by (3.4). See Figure 2.

Essentially, $\{\xi\}_{i=1}^n$ uniquely characterize the policy π^n due to (see also (3.2))

$$\pi_k^n = -\left(W^n(\tau_k^n-) + \sum_{i=1}^{k}\xi_i\right), \qquad 1 \leq k \leq n.$$

As a result, since $\xi_i \geq 0$, we can deduce the following lower bound:

$$C_{\text{int}}^n = \sum_{k=1}^{n}\left|W^n(\tau_k^n-) + \sum_{i=1}^{k}\xi_i\right| \geq \sum_{k=1}^{n}(W^n(\tau_k^n-))^+. \tag{4.2}$$

4.2. Right-shift policy and an upper bound on performance

Right-shift policy. The first sensor remains on its original location. After that, for $k \geq 1$: the $(k+1)$th sensor remains on its original location if it does not overlap with the already reallocated kth sensor; otherwise, the $(k+1)$th sensor is shifted to the right by the minimum distance required for that overlap to be eliminated.

Under the right-shift policy, the gaps $\{\xi_i\}$ between shifted sensors must satisfy

$$\xi_k = \left(\sum_{i=1}^{k-1}(\sigma^n + \xi_i) - \tau_k^n\right)^-, \qquad 1 \leq k \leq n, \tag{4.3}$$

since $\sum_{i=1}^{k-1}(\sigma^n + \xi_i)$ is the *right endpoint* of the $(k-1)$th shifted sensor.

Referring to the queueing model from Section 3.1 and its terminology, the length of the gap ξ_k in (4.3) corresponds to the *idling time* between serving the $(k-1)$th and the kth customers, in a standard G/D/1 queue under the first-come–first-served discipline. Moreover, the quantity $\sum_{i=1}^{k-1}(\sigma^n + \xi_i)$ now represents the *departure time* of the $(k-1)$th customer after being served.




FIGURE 2: Gaps between shifted sensors (interference problem).

https://doi.org/10.1017/jpr.2016.33 Published online by Cambridge University Press

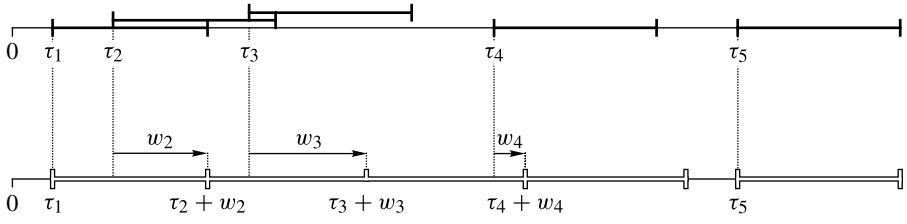


FIGURE 3: An implementation of the right-shift policy: second, third, and fourth sensors are shifted to the right by w_2, w_3, and w_4 units, respectively. The first and the fifth sensors do not move. The corresponding policy $\{\pi_1, \pi_2, \ldots\}$ is then given as $\pi_1 = \pi_5 = 0$, $\pi_i = -w_i$, for $i = 2, 3, 4$.

Combining the latter observation with (4.1) and (4.3), we see that the absolute value of the kth displacement

$$|\pi_k^n| = -\pi_k^n = \left(\sum_{i=1}^{k-1}(\sigma^n + \xi_i) - \tau_k^n\right)^+, \qquad 1 \le k \le n,$$

represents the *waiting time* of the kth arriving customer (see Figure 3). As a result, the total displacement cost is equal to the total waiting time among n customers and

$$C_{\text{int}}^n \le \sum_{k=1}^n w_k^n, \tag{4.4}$$

where w_k^n stands for the waiting time of the kth customer in a corresponding queue.

5. Asymptotic analysis of the interference problem

Proposition 5.1. (Overloaded regime.) *For sensor sets of type* O*, as* $n \to \infty$*,*

$$\mathbb{E}(C_{\text{int}}^n) = \Theta(n) \quad \textit{and} \quad C_{\text{int}}^n = \Theta(n) \quad \textit{a.s.}$$

Proof. Combining (3.3) and (4.2), we obtain

$$\sum_{k=1}^n (W^n(\tau_k^n-))^+ \le C_{\text{int}}^n \le \sum_{k=1}^n |W^n(\tau_k^n-)|. \tag{5.1}$$

We start with the lower bound. Since $n\sigma^n \to \alpha_\sigma > 1$, there exist constants $\delta > 0$ and $c > 0$ so that, for large enough n, $\sigma^n - (1+\delta)/n \ge c/n$. From (3.2) and Assumption 2.1, we have

$$W^n(\tau_k^n-) = -\sigma^n + \sum_{i=1}^k \left(\sigma^n - \frac{1+\delta}{n}\right) + \sum_{i=1}^k \left(\frac{1+\delta}{n} - \frac{\zeta_i}{n}\right).$$

Since $\mathbb{E}(\zeta_i) = 1$ and $\delta > 0$, the expectation of the last term is positive. In addition, by the law of large numbers, we have $\sum_{k=1}^n (k/n)[(1/k)\sum_{i=1}^k (1+\delta-\zeta_i)] \ge 0$ a.s. for large enough n. This implies that

$$\sum_{k=1}^n W^n(\tau_k^n-) \ge -n\sigma^n + \left(\frac{1}{2}\right)cn \ge -(1+\alpha_\sigma) + \left(\frac{1}{2}\right)cn \ge \left(\frac{1}{3}\right)cn$$

for large enough n. Since $(W^n)^+ \ge W^n$, the lower bound in (5.1) together with the last inequality, imply $C_{\text{int}}^n = \Omega(n)$ a.s. and in expectation.

https://doi.org/10.1017/jpr.2016.33 Published online by Cambridge University Press

For the upper bound, we use a crude estimate $|W^n(\tau_k^n-)| \le (k-1)\sigma^n + \tau_k^n$. By Definition 2.1, we have $\sum_{k=1}^n (k-1)\sigma^n = \mathrm{O}(n)$ so we just need to establish a bound for $\sum_{k=1}^n \tau_k^n$. We have (recall Assumption 2.1)

$$\sum_{k=1}^n \tau_k^n = \sum_{k=1}^n \frac{k}{n} + \sum_{k=1}^n \left(\tau_k^n - \frac{k}{n}\right) = \frac{n+1}{2} + \sum_{k=1}^n \frac{k}{n}\left[\frac{1}{k}\sum_{i=1}^k (\zeta_i - 1)\right].$$

The expectation of the last term above is trivially 0. Now, fix an arbitrary $\varepsilon > 0$. By the law of large numbers, we have $(1/k)\sum_{i=1}^k (\zeta_i - 1) \le \varepsilon$ a.s. for all large enough k. Therefore, $\sum_{k=1}^n \tau_k^n \le n(1+\varepsilon)$ for all large enough n. Hence, $\sum_{k=1}^n \tau_k^n = \mathrm{O}(n)$ both in expectation and a.s., concluding the proof. □

Proposition 5.2. (Critical regime.) *For sensor sets of type* C*, as* $n \to \infty$*,*

$$\mathbb{E}(C_{\mathrm{int}}^n) = \Theta(n^{1/2}). \tag{5.2}$$

Proof. Once again, we analyze the bounds from (5.1). Write

$$\sum_{k=1}^n (W^n(\tau_k^n-))^+ = \int_0^{\tau_n^n} (W^n(t-))^+ \mathrm{d}[N^n(t) - a^n(t)] + \int_0^{\tau_n^n} (W^n(t-))^+ \mathrm{d}a^n(t), \tag{5.3}$$

where (see [7, p. 98]) a^n is a compensator of N^n; hence, the integrator $N^n(t) - a^n(t)$ in the first expression of (5.3) is a martingale. As a result, the process $M(\cdot) = \int_0^{\cdot} (W^n(t-))^+ \mathrm{d}[N^n(t) - a^n(t)]$ is a martingale (see [12, p. 88, Theorem 6.5.8]) with expectation 0, hence by the optional sampling theorem (see [8, p. 19, Theorem 3.22]) (since τ_n^n is a stopping time), it follows that the first term in (5.3) has zero expectation. Regarding the second term of (5.3), the compensator must satisfy

$$\frac{\mathrm{d}a^n(t)}{\mathrm{d}t} = n\frac{f_\zeta(nt - n\tau_{N^n(t-)}^n)}{1 - F_\zeta(nt - n\tau_{N^n(t-)}^n)} = nh_\zeta(nt - n\tau_{N^n(t-)}^n), \tag{5.4}$$

where h_ζ is a hazard rate of random variable ζ. We claim that

$$\int_0^{\tau_n^n} (W^n(t-))^+ \mathrm{d}a^n(t) \ge c_1 n \int_0^{\tau_n^n} (W^n(t-))^+ \mathrm{d}t - c_2 \tag{5.5}$$

for some constants $c_1 > 0$ and $c_2 > 0$. Indeed, take some $c_1 > 0$ and let D be the set on which $h_\zeta(\cdot) \ge 2c_1$. Owing to the 'triangular' shape of W^n, we can ensure that c_1 is small enough to guarantee that

$$\int_0^{\tau_n^n} (W^n(t-))^+ \mathbf{1}_{D^c}(t)\,\mathrm{d}t \le \frac{1}{2}\int_0^{\tau_n^n} (W^n(t-))^+ \mathrm{d}t + n\frac{(\sigma^n)^2}{2},$$

where $\mathbf{1}$ is the indicator function.

Then

$$n\int_0^{\tau_n^n} (W^n(t-))^+ h_\zeta(nt - n\tau_{N^n(t-)}^n)\,\mathrm{d}t \ge 2c_1 n \int_0^{\tau_n^n} (W^n(t-))^+ \mathbf{1}_D(t)\,\mathrm{d}t$$

https://doi.org/10.1017/jpr.2016.33 Published online by Cambridge University Press

$$= 2c_1 n \int_0^{\tau_n^n} (W^n(t-))^+ \,\mathrm{d}t - 2c_1 n \int_0^{\tau_n^n} (W^n(t-))^+ \mathbf{1}_{D^c}(t)\,\mathrm{d}t$$
$$\geq c_1 n \int_0^{\tau_n^n} (W^n(t-))^+ \,\mathrm{d}t - c_2 \quad \text{for some } c_2 > 0,$$

because $(n\sigma^n)^2 = \Theta(1)$; and (5.5) follows. Combining (5.3)–(5.5), we obtain

$$\mathbb{E}\left[\sum_{k=1}^{n} (W^n(\tau_k^n-))^+\right] \geq c_1 n \mathbb{E}\left[\int_0^{\tau_n^n} (W^n(t-))^+ \,\mathrm{d}t\right] - c_2. \tag{5.6}$$

Introduce $B^n(t) := n^{-1/2}(N^n(t) - nt)$ and write $W^n(t)$ as

$$W^n(t) = n^{-1/2}(n\sigma^n)B^n(t) + n^{1/2}(n\sigma^n - 1)t]. \tag{5.7}$$

It is well known that B^n converges to a standard Brownian motion (see [3, p. 110, Theorem 5.11]). In addition, we have $\mathbb{E}(\tau_n^n) = 1$. Next, we combine (5.6) and (5.7) with the lower bound inequality in (5.1), and use Fatou's lemma, to obtain $\mathbb{E}(C_{\text{int}}^n) = \Omega(n^{1/2})$. For the upper bound, we use [1, p. 1102, Lemma 2] where it is claimed that $\mathbb{E}(|B^n(t)|) \leq c_1(1 + t^{c_2})$, $n \in \mathbb{N}$, $t \in \mathbb{R}$ for some constants c_1 and c_2 independent of n and t. Applied to both (5.7) and the upper bound in (5.1), this yields $\mathbb{E}(C_{\text{int}}^n) = \mathrm{O}(n^{1/2})$ and (5.2). □

Proposition 5.3. (Underloaded regime.) *For sensor sets of type* U*, as* $n \to \infty$*,*

$$\mathbb{E}(C_{\text{int}}^n) = \mathrm{O}(1) \quad \textit{and} \quad C_{\text{int}}^n = \mathrm{O}(1) \quad \textit{a.s.} \tag{5.8}$$

Proof. Consider (4.4) with w_k^n—the waiting time of the kth customer in a G/D/1 queue. Recall that the times between arrivals are i.i.d. random variables, distributed as ζ_1/n, and the service is deterministic σ^n. From Lindley's relations ([16, Section 4.20]) we have $w_1 = 0$ and $w_{k+1}^n = (w_k^n + \sigma^n - \zeta_{k+1}/n)^+$ for $k \geq 1$. Introduce $\phi_k^n = n w_{k+1}^n$ and $\widetilde{\zeta}_k = \zeta_{k+1}$ for $k \geq 0$. The sequence $\{\phi_k^n\}_{k\geq 0}$ satisfies $\phi_0^n = 0$ and $\phi_{k+1}^n = (\phi_k^n + (n\sigma^n - \widetilde{\zeta}_{k+1}))^+$, defining a random walk on a positive half-plane, as introduced in Appendix A, with the *increment* $x_k^n = n\sigma^n - \widetilde{\zeta}_k$. To eliminate dependence on the parameter n in the increment, take some $\mathring{\sigma}$ satisfying $n\sigma^n < \mathring{\sigma} < 1$, (the existence of such $\mathring{\sigma}$ for large enough n is guaranteed by having $n\sigma^n \to \alpha_\sigma < 1$). Let $y_k = \mathring{\sigma} - \widetilde{\zeta}_k$, and define a sequence $\{\phi_k^y,\ k \geq 0\}$ as $\phi_0^y = 0$ and $\phi_{k+1}^y = (\phi_k^y + y_{k+1})^+$, $k \geq 0$. By the choice of $\mathring{\sigma}$, we must have $x_k^n \leq y_k$. Next, we use the comparison Lemma A.2 to obtain $\phi_k^n \leq \phi_k^y$ for all $k \geq 0$. Finally, by applying $\phi_k^n = n w_{k+1}^n \leq \phi_k^y$ to (4.4),

$$C_{\text{int}}^n \leq \frac{1}{n}\sum_{k=1}^{n-1} \phi_k^n \leq \frac{1}{n}\sum_{k=1}^{n} \phi_k^y,$$

and we are ready to apply Lemma A.1 to $\mathbf{\Phi} := \{\phi_k^y,\ k \geq 0\}$, with i.i.d. increments $\{y_1, y_2, \ldots\}$, satisfying $\mathbb{E}(y_1) < 0$, to arrive at (5.8). This completes the proof. □

We point out the clear advantage of the *queueing* bound (4.4) over the upper *workload* bound (5.1), which would still be at least $\Omega(\sqrt{n})$ (see (5.2)). At the same time, the lower bound in (5.1) will *undergo* a change in the regime and become O(1), since in the underloaded case W^n tends to be negative.

https://doi.org/10.1017/jpr.2016.33 Published online by Cambridge University Press

6. Coverage problem

6.1. A trivial lower bound on performance

Let $\pi^n \in \Pi_2^n$ (also satisfying (3.4)). If $\tau_k^n \geq (k-1)\sigma^n$ for some $k \geq 1$ then, obviously, π_k^n must satisfy $\pi_k^n \geq \tau_k^n - (k-1)\sigma^n$. This implies that $|\pi_k^n| \geq (\tau_k^n - (k-1)\sigma^n)^+ = (-W^n(\tau_k^n-))^+ = (W^n(\tau_k^n-))^-$, and we have a lower bound in terms of

$$C_{\text{cov}}^n \geq \sum_{k=1}^{n} (W^n(\tau_k^n-))^-. \tag{6.1}$$

6.2. Left-shift policy and an upper bound on performance

Left-shift policy. The first sensor is shifted left to the origin. After that, for $k > 1$: the $(k+1)$th sensor remains on its original location if it overlaps with the already reallocated sensor k; otherwise, the $(k+1)$th sensor shifts left to close the gap with the reallocated kth sensor, without overlapping it. See Figure 4.

Lemma 6.1. *The left-shift policy is characterized by the displacement*

$$\pi_k^n = (L^n(\tau_k^n-))^-, \quad k = 1, \dots, n, \tag{6.2}$$

where

$$L^n(t) = W^n(t) - \sup_{s\in[0,t]} (W^n(s) - \sigma^n)^+ \tag{6.3}$$

is a Skorokhod map (see Figure 5), reflecting W^n to $(-\infty, \sigma^n]$.

Lemma 6.1 implies the following upper bound for (2.2):

$$C_{\text{cov}}^n \leq \sum_{k=1}^{n} (L^n(\tau_k^n-))^-. \tag{6.4}$$

Proof of Lemma 6.1. For $k = 2, \dots, n$, define η_k to be the length of the overlap between the $(k-1)$th and kth sensors, *after* the left-shift policy had been performed. Assume that $\eta_1 = 0$. See Figure 6.

It is easy to see that the quantities $\{\eta_k\}$ satisfy the following recursive relation:

$$\eta_k = \left(\sum_{i=1}^{k-1} (\sigma^n - \eta_i) - \tau_k^n\right)^+ = \left(W^n(\tau_k^n-) - \sum_{i=1}^{k-1} \eta_i\right)^+, \tag{6.5}$$

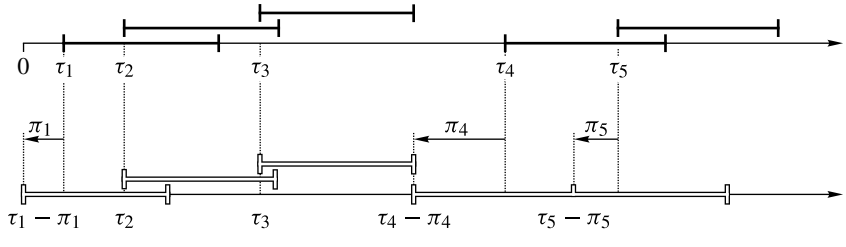


FIGURE 4: An implementation of the left-shift policy: first, fourth, and fifth sensors are shifted left by π_1, π_4, and π_5 units, respectively. The second and third sensors do not move.

https://doi.org/10.1017/jpr.2016.33 Published online by Cambridge University Press

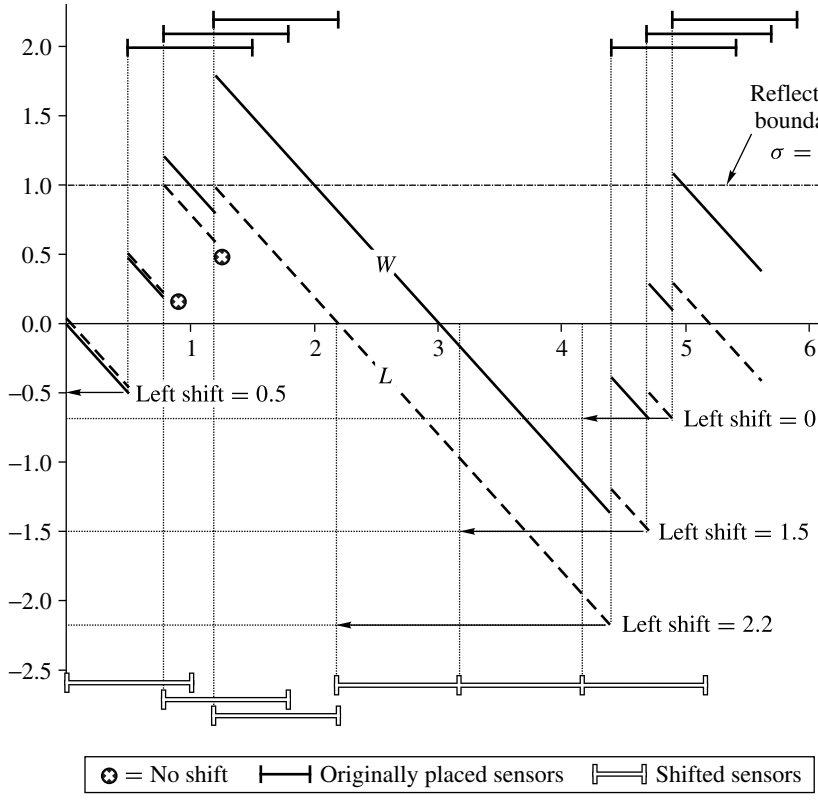


FIGURE 5: Realization of the left-shift policy, governed by the map L. The length $\sigma = 1$ and the original left endpoints are given as $\tau_1 = 0.5$, $\tau_2 = 0.8$, $\tau_3 = 1.2$, $\tau_4 = 4.4$, $\tau_5 = 4.7$, and $\tau_6 = 4.9$. The function L is a Skorokhod reflection of the potential outflow W to $(-\infty, 1]$. The left shifts are given as $\pi_k = L(\tau_k-)^-$, implying $\pi_1 = L(0.5-)^- = 0.5$, $\pi_2 = \pi_3 = 0$, (because $L(0.8-) > 0$ and $L(1.2-) > 0$), $\pi_4 = 2.2$, $\pi_5 = 1.5$, and $\pi_6 = 0.7$.




FIGURE 6: Overlaps between shifted sensors (coverage by the left-shift policy).

where we use the convention $\sum_1^0 = 0$. Indeed, (6.5) holds because $\sum_{i=1}^{k-1}(\sigma^n - \eta_i)$ is the coordinate of the *right endpoint* of the $(k-1)$th sensor after the *left-shift* allocation. Consequently, we have

$$\pi_k^n = \left(\tau_k^n - \sum_{i=1}^{k-1}(\sigma^n - \eta_i)\right)^+ = \left(W^n(\tau_k^n-) - \sum_{i=1}^{k-1}\eta_i\right)^-. \tag{6.6}$$

From (6.3), since W^n is decreasing on $[\tau_{k-1}^n, \tau_k^n)$, we have

$$L^n(\tau_k^n-) = W^n(\tau_k^n-) - \sup_{s\in[0,\tau_{k-1}^n]}(W^n(s) - \sigma^n)^+,$$

https://doi.org/10.1017/jpr.2016.33 Published online by Cambridge University Press

and (6.2) will follow from (6.6) once we show that

$$\sum_{i=1}^{k-1} \eta_i = \sup_{s\in[0,\tau_{k-1}^n]} (W^n(s) - \sigma^n)^+. \tag{6.7}$$

Introduce $R(t) = \sup_{s\in[0,t]}(W^n(s) - \sigma^n)^+$. The function R is a nondecreasing, piecewise constant function, with jumps possible only at the points $\{\tau_k^n\}_{k=1}^n$; that is,

$$R(t) = \sum_{k:\ \tau_k^n \le t} \Delta R(\tau_k^n), \qquad t \ge 0,$$

where $\Delta R(\tau_k^n) := R(\tau_k^n) - R(\tau_k^n-)$ is a jump of R at the point τ_k^n. Next we show that

$$\eta_k = \Delta R(\tau_k^n), \qquad 1 \le k \le n, \tag{6.8}$$

which will in turn imply (6.7) and conclude the lemma. For $k = 1$, (6.8) holds by the definition, since $\sup_{s\in[0,\tau_1^n]}(W^n(s) - \sigma^n)^+ = 0$ (see (3.1)). At the same time, the quantities $\{\Delta R(\tau_k^n)\}$ satisfy, for $k \ge 2$,

$$\begin{aligned}
\Delta R(\tau_k^n) &= \sup_{s\in[0,\tau_k^n]} (W^n(s) - \sigma^n)^+ - \sup_{s\in[0,\tau_{k-1}^n]} (W^n(s) - \sigma^n)^+ \\
&= \Big(W^n(\tau_k^n) - \sigma^n - \sup_{s\in[0,\tau_{k-1}^n]} (W^n(s) - \sigma^n)^+\Big)^+ \\
&= \Big(W^n(\tau_k^n-) - \sum_{i=1}^{k-1} \Delta R(\tau_i^n)\Big)^+,
\end{aligned}$$

which is the same recursive relation as (6.5) for quantities $\{\eta_k\}$. Together with $\eta_1 = \Delta R(\tau_1^n)$, the recursion implies (6.8), concluding the lemma. □

7. Asymptotic analysis of the coverage problem

Proposition 7.1. (Underloaded regime.) *For sensor sets of type* U*, as* $n \to \infty$*,*

$$\mathbb{E}(C_{\mathrm{cov}}^n) = \Theta(n) \quad \textit{and} \quad C_{\mathrm{cov}}^n = \Theta(n) \quad \textit{a.s.}$$

Proof. Applying the lower bound (6.1) together with the upper bound (3.3), we have

$$\sum_{k=1}^{n} (W^n(\tau_k^n-))^- \le C_{\mathrm{cov}}^n \le \sum_{k=1}^{n} |W^n(\tau_k^n-)|. \tag{7.1}$$

We follow the proof of Proposition 5.1. The upper bound treatment is identical. As for the lower bound, there must exist constants $\delta > 0$ and $c > 0$ so that, for large enough n, $(1-\delta)/n - \sigma^n \ge c/n$. Next, consider

$$-W^n(\tau_k^n-) = \sigma^n + \sum_{i=1}^{k}\Big(\frac{1-\delta}{n} - \sigma^n\Big) + \sum_{i=1}^{k}\Big(\frac{\zeta_i}{n} - \frac{1-\delta}{n}\Big).$$

Since $\mathbb{E}(\zeta_i) = 1$ and $\delta > 0$, the expectation of the last term is trivially positive. Then proceed as in the lower bound treatment in Proposition 5.1. □

https://doi.org/10.1017/jpr.2016.33 Published online by Cambridge University Press

Proposition 7.2. (Critical regime.) *For sensor sets of type* C*, as* $n \to \infty$*,*

$$\mathbb{E}(C^n_{\text{cov}}) = \Theta(n^{1/2}).$$

Proof. We use bounds (7.1) together with similar analysis from Proposition 5.2. □

Proposition 7.3. (Overloaded regime.) *For sensor sets of type* O*, as* $n \to \infty$*,*

$$\mathbb{E}(C^n_{\text{cov}}) = \text{O}(1) \quad \textit{and} \quad C^n_{\text{cov}} = \text{O}(1) \quad \textit{a.s.}$$

Proof. Our job will be to show the boundedness (in expectation and a.s.) of (6.4). It would be easier to operate with τ^n_k instead of τ^n_k-; and the definition (6.3) and Figure 5 suggest an obvious inequality

$$(L^n(\tau^n_k-))^- \le (L^n(\tau^n_k))^- + \sigma^n. \tag{7.2}$$

Since $n\sigma^n < \infty$, the boundedness of (6.4) will follow once we can show the boundedness of $\sum_{k=1}^n (L^n(\tau^n_k))^-$. To simplify the notation, let $L^n_0 = 0$, $W^n_0 = 0$ and $L^n_k = L^n(\tau^n_k)$, $W^n_k = W^n(\tau^n_k)$ for $k \ge 1$. Since $W^n(\cdot)$ can only increase at points $\{\tau^n_k\}$, we can write (6.3) as

$$L^n_k = W^n_k - \max_{r\in\{0,\dots,k\}} (W^n_r - \sigma^n)^+, \qquad k \ge 1.$$

Define $M^n_k = W^n_k - \max_{r\in\{0,\dots,k\}} W^n_r$. Since $W^n_0 = 0$, we have

$$\max_{r\in\{0,\dots,k\}} W^n_r = \max_{r\in\{0,\dots,k\}} (W^n_r)^+ \ge \max_{r\in\{0,\dots,k\}} (W^n_r - \sigma^n)^+,$$

yielding $L^n_k \ge M^n_k$ and, in particular, due to the nonpositivity of M^n,

$$(L^n_k)^- \le (M^n_k)^-. \tag{7.3}$$

Let $\psi^n_k = nM^n_k$. Together, (6.2), (6.4), (7.2), and (7.3) imply that

$$C^n_{\text{cov}} \le n\sigma^n + \frac{1}{n}\sum_{k=1}^n (\psi^n_k)^-. \tag{7.4}$$

From the definition of M^n, we have $\psi^n_0 = 0$ and

$$\psi^n_k = nW^n_k - \max_{r\in\{0,\dots,k\}} nW^n_r, \qquad k \ge 1, \tag{7.5}$$

where, using (3.1) and Assumption 2.1,

$$nW^n_k = \sum_{i=1}^k (n\sigma^n - n[\tau^n_i - \tau^n_{i-1}]) = \sum_{i=1}^k (n\sigma^n - \zeta_i). \tag{7.6}$$

Equations (7.5) and (7.6) define $\mathbf{\Psi}^n = \{\psi^n_k,\ k \ge 0\}$—a random walk on the negative half-plane, as described in Appendix B, with i.i.d. increments $\{n\sigma^n - \zeta_k,\ k \ge 1\}$.

To properly analyze (7.4) we first need to eliminate dependence on n in the increment $n\sigma^n - \zeta_k$. Take some $\mathring{\sigma}$, satisfying $1 < \mathring{\sigma} < n\sigma^n$ (the existence of such $\mathring{\sigma}$ for large enough n is guaranteed by having $n\sigma^n \to \alpha_\sigma > 1$). Define $z_k = \mathring{\sigma} - \zeta_k$ and introduce $\mathbf{\Psi}^z = \{\psi^z_k,\ k \ge 0\}$ defined as $\psi^z_0 = 0$ and $\psi^z_{k+1} = -(\psi^z_k + z_{k+1})^-$, $k \ge 0$. Once again, as described in

https://doi.org/10.1017/jpr.2016.33 Published online by Cambridge University Press

Appendix B, $\mathbf{\Psi}^z$ is a random walk on the negative half-plane, with i.i.d. increments $\{z_k,\ k \geq 1\}$. By the choice of $\mathring{\sigma}$, we must have $z_k \leq n\sigma^n - \zeta_k$; hence, we can apply a comparison result of Lemma B.2 to obtain $(\mathbf{\Psi}^n)^- \leq (\mathbf{\Psi}^z)^-$. Applying the latter to (7.4), together with Lemma B.1 (valid due to $\mathbb{E}(z_1) > 0$), we have

$$C^n_{\mathrm{cov}} \leq n\sigma^n + \frac{1}{n}\sum_{k=1}^{n}(\psi^n_z)^- < \infty,$$

in expectation and a.s. This concludes the proposition. □

8. Mixed problem

Mixed policy (MP). The first sensor is shifted left to the origin. After that, for every $k \geq 1$: the $(k+1)$th sensor remains on its original location if it overlaps with the already reallocated kth sensor by no more than r^n; in the case the overlap is greater than r^n, the $(k+1)$th sensor shifts right to make the overlap equal r^n. Lastly, if there is no overlap between the $(k+1)$th sensor and the reallocated kth sensor, the $(k+1)$th sensor shifts left until it touches the reallocated kth sensor, without overlapping. See Figure 7.

Lemma 8.1. *The MP policy is characterized by the displacement*

$$\pi^n_k = (P^n(\tau^n_k-))^- - (P^n(\tau^n_k-) - r^n)^+, \tag{8.1}$$

where P is a modified Skorokhod reflection map

$$P^n(t) = W^n(t) - \sum_{k:\ \tau^n_k \leq t}(P^n(\tau^n_k-))^+ \wedge r^n. \tag{8.2}$$

Discussion of Lemma 8.1. The policy says that (recall Section 2.1), the kth sensor moves right if $P^n(\tau^n_k-) > r^n$; moves left if $P^n(\tau^n_k-) < 0$; and remains in its original place if $0 \leq P^n(\tau^n_k-) < r^n$ (see Figure 8).

Looking closer, we can see that (8.2) has quite a lot of similarities with (6.3). Indeed, from its definition and Figure 5 it is easy to see that $L^n(t) = W^n(t) - \sum_{k:\ \tau^n_k \leq t}(L^n(\tau^n_k-))^+$. Therefore, the processes L^n and P^n would be identical if not for the r^n restriction. Naturally, the MP policy produces an upper bound

$$C^n_{\mathrm{mix}} \leq \sum_{k=1}^{n}[(P^n(\tau^n_k-))^- + (P^n(\tau^n_k-) - r^n)^+]. \tag{8.3}$$

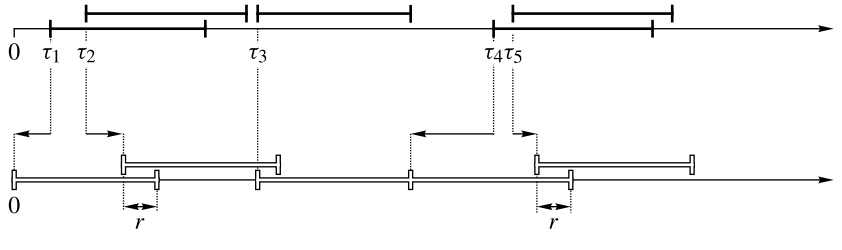


FIGURE 7: An implementation of the mixed policy: the first and the fourth sensors are shifted to the left to close the gap; the second and the fifth sensors (and it is the main difference from the left-shift policy) are shifted to the right, to ensure that the overlap does not exceed r; the third sensor stays on its original location, since the overlap is already smaller than r.

https://doi.org/10.1017/jpr.2016.33 Published online by Cambridge University Press

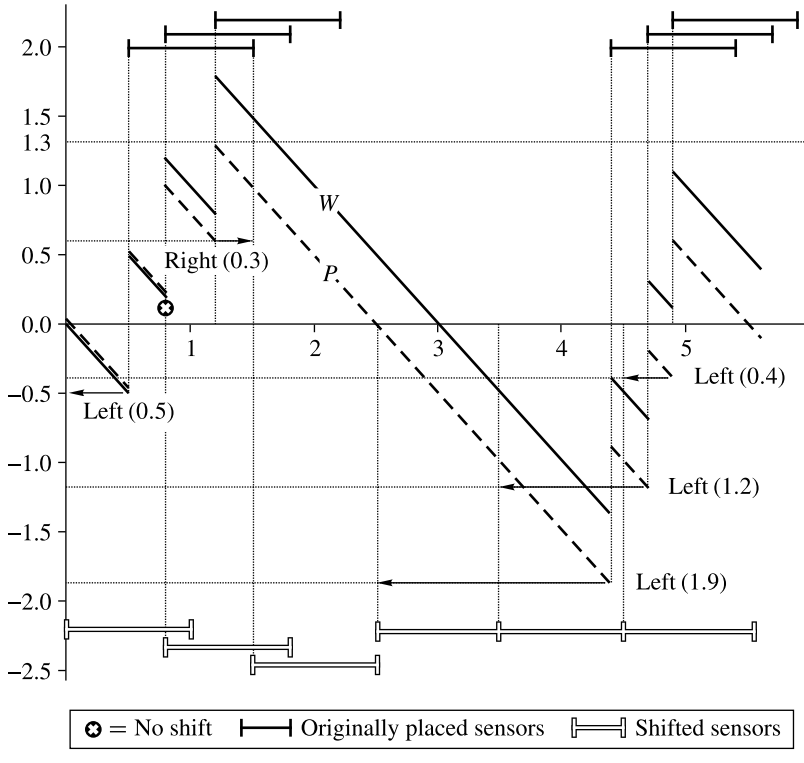


FIGURE 8: Mixed mapping for sensors displacement with $\sigma = 1$ and $r = 0.3$. Here we have the same set of original sensors as in Figure 5. Both functions P and L (reflected mapping from Figure 5) behave identically up to the jump at the point 0.8, and this is due to the fact that $P(0.8-) = 0.2 < 0.3$, in which case P can not jump above the level $\sigma = 1$. On the other hand, at the jump point 1.2 the function P does go above the level $\sigma = 1$, (since $P(1.2-) = 0.6 > 0.3$) although its jump is now shortened by $r = 0.3$, and is equal to $1 - 0.3 = 0.7$.

Proof of Lemma 8.1. Similarly to the proof of Lemma 6.1 (see Figure 6), let $\{\tilde{\eta}_k\}_{k=2}^n$ be the *overlaps* between the $(k-1)$th and kth sensors in the final placement according to the MP policy. Assume that $\tilde{\eta}_1 = 0$. We can show that the MP policy implies the following recursive relation:

$$\tilde{\eta}_k = \left(\sum_{i=1}^{k-1}(\sigma^n - \tilde{\eta}_i) - \tau_k^n\right)^+ \wedge r^n = \left(W^n(\tau_k^n-) - \sum_{i=1}^{k-1}\tilde{\eta}_i\right)^+ \wedge r^n. \tag{8.4}$$

Again, (8.4) holds because $\sum_{i=1}^{k-1}(\sigma^n - \tilde{\eta}_i)$ is the coordinate of the *right endpoint* of the $(k-1)$th sensor after the MP allocation. Consequently, we have

$$\begin{aligned}\pi_k^n &= \left(\tau_k^n - \sum_{i=1}^{k-1}(\sigma^n - \tilde{\eta}_i)\right)^+ - \left(\sum_{i=1}^{k-1}(\sigma^n - \tilde{\eta}_i) - \tau_k^n - r^n\right)^+ \\ &= \left(W^n(\tau_k^n-) - \sum_{i=1}^{k-1}\tilde{\eta}_i\right)^- - \left(W^n(\tau_k^n-) - \sum_{i=1}^{k-1}\tilde{\eta}_i - r^n\right)^+.\end{aligned}$$

https://doi.org/10.1017/jpr.2016.33 Published online by Cambridge University Press

From (8.2), $P^n(\tau_k^n-) = W^n(\tau_k^n-) - \sum_{i=1}^{k-1}(P^n(\tau_i^n-))^+ \wedge r^n$ and (8.1) will follow once we show that

$$\tilde{\eta}_k = (P^n(\tau_k^n-))^+ \wedge r^n, \qquad 1 \le k \le n. \tag{8.5}$$

Since $P^n(\tau_1^n-) < 0$, (8.5) holds trivially for $k = 1$. Next, proceed by induction. For $k \ge 2$, assume that (8.5) holds for $1, 2, \dots, k-1$. From (8.4),

$$\tilde{\eta}_k = \left(W^n(\tau_k^n-) - \sum_{i=1}^{k-1}(P^n(\tau_i^n-))^+ \wedge r^n\right)^+ \wedge r^n = (P^n(\tau_k^n-))^+ \wedge r^n,$$

as desired. The proof is now complete. □

9. Asymptotic analysis of the mixed problem

We shall need the following simple consequence of the definitions in (2.2) and (2.3):

$$C^n_{\text{mix}} \ge C^n_{\text{cov}}. \tag{9.1}$$

Proposition 9.1. (The underloaded regime.) *For sensor sets of type* U*, as* $n \to \infty$*,*

$$\mathbb{E}(C^n_{\text{mix}}) = \Theta(n). \tag{9.2}$$

Proof. Owing to (7.1), (9.1), and an upper bound (3.3) from the base coverage policy

$$\sum_{k=1}^{n}(W^n(\tau_k^n-))^- \le C^n_{\text{mix}} \le \sum_{k=1}^{n}|W^n(\tau_k^n-)|, \tag{9.3}$$

and the arguments from the proof of Proposition 7.1 for $n\sigma^n \to \alpha_\sigma < 1$ imply (9.2). □

Proposition 9.2. (The critical regime.) *For sensor sets of type* C*, as* $n \to \infty$*,*

$$\mathbb{E}(C^n_{\text{mix}}) = \Theta(n^{1/2}). \tag{9.4}$$

Proof. We use the bounds (9.3) and the considerations from Proposition 5.2. □

Note that in obtaining both estimates (9.2) and (9.4) we did not use any information about r^n. It comes into play in the last, considerably more involved, asymptotic regime for this problem. Each of the three different subregimes will be treated separately.

Proposition 9.3. (The $\text{O}^{(o)}$ regime.) *For sensor sets of type* $\text{O}^{(o)}$*, as* $n \to \infty$*,*

$$\mathbb{E}(C^n_{\text{mix}}) = \Theta(n) \quad \textit{and} \quad C^n_{\text{mix}} = \Theta(n) \quad \textit{a.s.} \tag{9.5}$$

Proof. Start with the lower bound. Owing to Lemma 3.1, a policy in Π_3^n must satisfy

$$\tau_i^n - \pi_i^n + \sigma^n - r^n \le \tau_{i+1}^n - \pi_{i+1}^n \quad \text{for each } 1 \le i \le n-1. \tag{9.6}$$

The above condition can be interpreted as that, once 'shortened' by r^n *from the right*, the modified sensors no longer interfere. That is, by allocating original sensors to satisfy (9.6), we automatically allocate 'shortened' sensors to avoid interference. Naturally, the relation does

https://doi.org/10.1017/jpr.2016.33 Published online by Cambridge University Press

not work in another direction, since one still needs to achieve coverage; that is, a policy must satisfy the requirements of Π_2^n. As a result,

$$C_{\text{mix}}^n \geq C_{\text{int}}^{n,\sigma^n - r^n}, \tag{9.7}$$

with $C_{\text{int}}^{n,\sigma^n - r^n}$ being the analog of C_{int}^n from (2.1) for the case when all sensors are shortened by r^n from the right. Hence, applying to (9.7) the modified version of (4.2),

$$C_{\text{mix}}^n \geq \sum_{k=1}^{n} (W_{\sigma^n - r^n}^n(\tau_k^n -))^+, \tag{9.8}$$

with $W_{\sigma^n - r^n}^n$ being the analog of (3.1) and (3.2), accommodating the shortened length of $\sigma^n - r^n$; that is, $W_{\sigma^n - r^n}^n(t) = (\sigma^n - r^n)N^n(t) - t$. For the upper bound, we follow the previous discussion and use the base coverage (3.3) but for sensors *shortened by* r^n from the right (obviously, such base coverage satisfies the requirements of the mixed problem). Combined with (9.8), we now have

$$\sum_{k=1}^{n} (W_{\sigma^n - r^n}^n(\tau_k^n -))^+ \leq C_{\text{mix}}^n \leq \sum_{k=1}^{n} |W_{\sigma^n - r^n}^n(\tau_k^n -)|, \tag{9.9}$$

and the assertion (9.5) can be shown as in Proposition 5.1. □

Proposition 9.4. (The $\text{O}^{(c)}$ regime.) *For sensor sets of type* $\text{O}^{(c)}$*, as* $n \to \infty$*,*

$$\mathbb{E}(C_{\text{mix}}^n) = \Theta(n^{1/2}).$$

Proof. The proof follows from (9.9) and Proposition 5.2 after replacing σ^n by $\sigma^n - r^n$. □

Proposition 9.5. *[The* $\text{O}^{(u)}$ *regime] For sensor sets of type* $\text{O}^{(u)}$*, as* $n \to \infty$*,*

$$\mathbb{E}(C_{\text{mix}}^n) = \text{O}(1) \quad \textit{and} \quad C_{\text{mix}}^n = \text{O}(1) \quad \textit{a.s.}$$

Proof. Let π^n be the MP policy from (8.1). The statement of the proposition will follow once we show that

$$\sup_n \|\pi^n\| < \infty \quad \text{a.s.}, \quad \sup_n \mathbb{E}(\|\pi^n\|) < \infty. \tag{9.10}$$

Define $P_k^n := P^n(\tau_k^n -)$, $Z_k^n = \sigma^n - \zeta_k/n$, $1 \leq k \leq n$. From (3.2), (8.2), and Assumption 2.1, we have $P_1^n = -\zeta_1/n < 0$ and

$$P_{k+1}^n = P_k^n + Z_{k+1}^n - (P_k^n)^+ \wedge r^n, \qquad 1 \leq k \leq n-1. \tag{9.11}$$

We need the following two lemmas.

Lemma 9.1. *For the sequence* $\{P_k^n\}$ *from (9.11) and a random walk* $\{X_k^n,\ k \geq 1\}$*, defined as* $X_1^n = P_1^n$ *and* $X_{k+1}^n = -(X_k^n + Z_{k+1}^n)^-$*, we have*

$$(P_k^n)^- \leq (X_k^n)^-, \qquad 1 \leq k \leq n. \tag{9.12}$$

Proof. Consider an auxiliary sequence $\{M_k^n,\ k \geq 1\}$, defined recursively as $M_1^n = P_1^n$ and $M_{k+1}^n = M_k^n + Z_{k+1}^n - (M_k^n)^+$. It is easy to see that $M_k^n \leq P_k^n$ for all $k \geq 1$. The next step is to show that $X_k^n \leq M_k^n$ by induction. Indeed, the relation holds for $k = 1$. Assume now it holds for k. Consider three cases.

https://doi.org/10.1017/jpr.2016.33 Published online by Cambridge University Press

Case 1. If $0 \le X_k^n \le M_k^n$ then $X_k^n = 0$ and $X_{k+1}^n = -(Z_{k+1}^n)^-$. On the other hand, $M_{k+1}^n = Z_{k+1}^n \ge -(Z_{k+1}^n)^- = X_{k+1}^n$.

Case 2. If $X_k^n \le 0 \le M_k^n$ then $M_{k+1}^n = Z_{k+1}^n$ and $X_{k+1}^n \le M_{k+1}^n$ trivially holds for $Z_{k+1}^n \le 0$ since in that case $X_{k+1}^n = X_k^n + Z_{k+1}^n$. If $Z_{k+1}^n > 0$ then $X_{k+1}^n \le M_{k+1}^n = Z_{k+1}^n$ is obvious since $X_{k+1}^n \le 0$.

Case 3. If $X_k^n \le M_k^n \le 0$ then $M_{k+1}^n = M_k^n + Z_{k+1}^n \ge X_k^n + Z_{k+1}^n \ge -(X_k^n + Z_{k+1}^n)^- = X_{k+1}^n$.

Combining $X_k^n \le M_k^n$ and $M_k^n \le P_k^n$, we have $X_k^n \le P_k^n$ and (9.12) as a result. □

Lemma 9.2. *Let $U_k^n = Z_k^n - r^n$ for $1 \le k \le n$ and define a random walk $\{Y_k^n,\ k \ge 1\}$ as follows: $Y_1^n = 0$ and $Y_{k+1}^n = (Y_k^n + U_{k+1}^n)^+$. Then*

$$(P_k^n - r^n)^+ \le Y_k^n, \qquad 1 \le k \le n. \tag{9.13}$$

Proof. Since $Y_k^n \ge 0$, it would be enough to show that $P_k^n - r^n \le Y_k^n$ for all $k \ge 1$. We will use the induction argument. The relation clearly holds for $k = 1$. Now, assume that $P_k^n - r^n \le Y_k^n$ holds for some $k \ge 1$, and show that $P_{k+1}^n - r^n \le Y_{k+1}^n$.

Case 1: $P_k^n - r^n \le Y_k^n = 0$. Then $Y_{k+1}^n = (U_{k+1}^n)^+$. At the same time

$$P_{k+1}^n - r^n = \begin{cases} Z_{k+1}^n - r^n & \text{if } 0 \le P_k^n \le r^n, \\ P_k^n + Z_{k+1}^n - r^n & \text{if } P_k^n < 0, \end{cases} \tag{9.14}$$

and we have $P_{k+1}^n - r^n \le (Z_{k+1}^n - r^n)^+ = (U_{k+1}^n)^+ = Y_{k+1}^n$.

Case 2: $P_k^n - r^n \le 0 \le Y_k^n$. In this case the relation follows once again from (9.14) since $P_{k+1}^n - r^n \le (Z_{k+1}^n - r^n)^+ = (U_{k+1}^n)^+ \le (Y_k^n + U_{k+1}^n)^+ = Y_{k+1}^n$.

Case 3: $0 \le P_k^n - r^n \le Y_k^n$. In this case (recall (9.11))

$$\begin{aligned} P_{k+1}^n - r^n &= P_k^n - r^n + Z_{k+1}^n - r^n \\ &\le Y_k^n + Z_{k+1}^n - r^n \\ &\le (Y_k^n + Z_{k+1}^n - r^n)^+ \\ &= (Y_k^n + U_{k+1}^n)^+ \\ &= Y_{k+1}^n. \end{aligned}$$

This completes the proof. □

We are about to finalize the statement (9.10). From (8.3), (9.12), and (9.13), we have

$$\|\pi^n\| = \sum_{k=1}^n |\pi_k^n| \le \sum_{k=1}^n (X_k^n)^- + \sum_{k=1}^n Y_k^n = \frac{1}{n} \sum_{k=1}^n [(\psi_k^n)^- + \phi_k^n],$$

where $\psi_k^n = nX_k^n$ and $\phi_k^n = nY_k^n$ satisfy $\psi_1^n = -\zeta_1$, $\phi_1^n = 0$ and $\psi_{k+1}^n = -(\psi_k^n + n\sigma^n - \zeta_{k+1})^-$, $\phi_{k+1}^n = (\phi_k^n + n(\sigma^n - r^n) - \zeta_{k+1})^+$ for $k \ge 2$. The last step would be to apply Lemma A.1 for $\{\phi_n^y,\ k \ge 1\}$ and Lemma B.1 for $\{\psi_k^n,\ k \ge 1\}$, but not before both sequences are modified to eliminate dependence on the parameter n (as was done in Propositions 5.3 and 7.3). We omit the details.

This completes the proof of Proposition 9.5. □

https://doi.org/10.1017/jpr.2016.33 Published online by Cambridge University Press

10. Concluding remarks

We presented a new *queueing* approach to study the asymptotic behaviour of the sensor allocation problems. The method is robust and can be expanded in different directions—we can introduce new allocation costs, allow sensor length to be random, or try to find asymptotically optical solutions. In addition, one can further investigate the reflection mappings (6.3), (8.2) and their applicability in related generalizations.

We lastly comment that Assumption 2.2 and Definition 2.1 can be relaxed. In fact, the results of Theorem 2.1 will still hold for the underloaded regime U characterized by $0 \le \liminf n\sigma^n \le \limsup n\sigma^n < 1$, or the overloaded regime O characterized by $1 < \liminf n\sigma^n$. For the critical C case when $n\sigma^n \to 1$, one can introduce a *lower intermediate* regime $n\sigma^n \approx 1-\delta n^{-\beta}$ for $\delta > 0$ and $\beta \in (0, \frac{1}{2})$, bridging the critical regime (corresponding to $\beta = \frac{1}{2}$) down to the underloaded regime ($\beta = 0$); as well as the *upper intermediate* regime $n\sigma^n \approx 1 + \delta n^{-\beta}$ for $\delta > 0$ and $\beta \in (0, \frac{1}{2})$, connecting the critical ($\beta = \frac{1}{2}$) and overloaded ($\beta = 0$) regimes. The estimates for the interference problem can be easily adjusted to include $\Theta(n^\beta)$ for the lower intermediate, and $\Theta(n^{1-\beta})$ for the upper intermediate regimes. A similar situation, but with $\Theta(n^\beta)$ and $\Theta(n^{1-\beta})$ interchanged, we believe holds for the coverage problem. In addition, a *super-overloaded* regime $n\sigma^n \approx \gamma_n$ for some sequence $\gamma_n \uparrow \infty$ will imply the estimate of $\Theta(n\gamma_n)$ for the interference problem; the coverage problem will remain O(1).

Appendix A. Random walk on a positive half-plane

For a sequence of real numbers $\{x_k,\ k \ge 1\}$, define a new sequence $\{\phi_k,\ k \ge 0\}$ as

$$\phi_0 = 0, \qquad \phi_{k+1} = (\phi_k + x_{k+1})^+, \quad n \ge 0. \tag{A.1}$$

By induction [15, p. 197, Lemma B1], ϕ_k satisfies, for $k \ge 1$,

$$\phi_k = s_k - \min_{0 \le r \le k} s_r, \tag{A.2}$$

where $s_0 = 0$, $s_k = x_1 + \cdots + x_k$. In fact, both (A.1) and (A.2) are equivalent.

Lemma A.1. *Assume that* $\{x_1, \ldots\}$ *are i.i.d. random variables with* $\mathbb{E}(x_1) < 0$ *and* $\mathbb{E}(x_1^2) < \infty$. *Then the random process* $\mathbf{\Phi} = \{\phi_n,\ n \ge 0\}$ *satisfies*

$$\sup_n \left(\frac{1}{n} \sum_{k=1}^n \phi_k \right) < \infty \quad a.s., \quad \sup_n \mathbb{E}\left(\frac{1}{n} \sum_{k=1}^n \phi_k \right) < \infty. \tag{A.3}$$

Proof. The first statement would follow from [13, p. 422, Theorem 17.0.1] showing the result for a *positive Harris recurrent* chain with *finite invariant probability* that has at least *one moment*. Let us make sure that all the conditions hold. The recurrence of $\mathbf{\Phi}$ has been established in [13, p. 193, Proposition 8.5.1], the Harris recurrence (see the definition in [13, p. 199]) follows from the ψ-irreducibility of $\mathbf{\Phi}$ (see [13, Proposition 4.3.1], and the last paragraph of [13, p. 87]), and the Harris recurrence of the *petite set/atom* at {0} [13, p. 205, Proposition 9.1.7], since, with probability 1, the chain visits {0} infinitely often. The latter claim, though very intuitive, follows from the boundedness of the expected *busy period* time between successive visits to {0}, which can be found in [15, p. 27, Theorem 7], using their notation $\mathbb{E}(\bar{N}) < \infty$ if $\alpha < 0$. This last reference also implies the existence of a *finite invariant measure* (see [13, p. 234, Theorem 10.2.1(iii)]). The properly normalized invariant measure then becomes a *stationary probability measure*. Finally, the existence of moments for the stationary probability is guaranteed by [13, p. 352, Proposition 14.4.1].

https://doi.org/10.1017/jpr.2016.33 Published online by Cambridge University Press

For the second statement in (A.3), since $\phi_0 = 0$, we can almost surely (pathwise) bound $\mathbf{\Phi}$ from above by stationary $\mathbf{\Phi}^\infty = \{\phi_k^\infty,\ k \geq 0\}$, such that ϕ_0^∞ is already stationary distributed. As a result, for each $k \geq 1$, we have $\mathbb{E}(\phi_k) \leq \mathbb{E}(\phi_k^\infty) < \infty$ (since the stationary distribution has at least one moment), completing (A.3). □

Lemma A.2. (Comparison.) *Assume we are given two sets of numbers* $\{x_k,\ k \geq 1\}$ *and* $\{y_k,\ k \geq 1\}$ *satisfying* $x_k \leq y_k$ *for all* $k \geq 1$. *Let* $\mathbf{\Phi}^x = \{\phi_k^x,\ n \geq 0\}$ *be defined as in (A.1) and* $\mathbf{\Phi}^y = \{\phi_n^y,\ k \geq 0\}$ *be defined as* $\phi_0^y = 0$, $\phi_{k+1}^y = (\phi_k^y + y_{k+1})^+$, $k \geq 0$. *Then* $\mathbf{\Phi}^x \leq \mathbf{\Phi}^y$; *that is,* $\phi_k^x \leq \phi_k^y$ *for all* $k \geq 0$.

Proof. The $k = 0$ case is trivial. After that we apply the induction argument, because having $\phi_{k-1}^x \leq \phi_{k-1}^y$ for a certain $k \geq 1$ will necessarily imply $\phi_{k-1}^x + x_k \leq \phi_{k-1}^y + y_k$, which immediately yields $\phi_k^x = (\phi_{k-1}^x + x_k)^+ \leq (\phi_{k-1}^y + y_k)^+ = \phi_k^y$. □

Appendix B. Random walk on a negative half-plane

Alternatively, for $\{x_k,\ k \geq 1\}$, define $\mathbf{\Psi} = \{\psi_k, k \geq 0\}$ as

$$\psi_0 = 0, \qquad \psi_{k+1} = -(\psi_k + x_{k+1})^-, \quad k \geq 0. \tag{B.1}$$

Note that $\psi_k \leq 0$ for all $k \geq 0$. The above representation is equivalent to (see (A.2))

$$\psi_k = s_k - \max_{0 \leq r \leq k} s_r, \qquad k \geq 0.$$

Lemma B.1. *Assume that* $\{x_1, \ldots\}$ *are i.i.d. random variables with* $\mathbb{E}(x_1) > 0$ *and* $\mathbb{E}(x_1^2) < \infty$. *Then the relations in (A.3) hold for* $\mathbf{\Phi} = -\mathbf{\Psi} = (\mathbf{\Psi})^-$.

Proof. Note that $-\mathbf{\Psi} = (\mathbf{\Psi})^-$ due to the nonpositivity of $\mathbf{\Psi}$. Now, let $\mathbf{\Phi} = -\mathbf{\Psi}$. Then

$$\phi_k = -\psi_k = -s_k + \max_{0 \leq r \leq k} s_r = \widetilde{s}_k - \min_{0 \leq r \leq k} \{\widetilde{s}_r\}, \tag{B.2}$$

where $\widetilde{s}_k = -s_k = (-x_1) + \cdots + (-x_k)$. Equation (B.2) defines a random walk on the positive half-plane, as described in Appendix A, with the i.i.d. increments $\{-x_i, i = 1, \ldots\}$. Since $\mathbb{E}(-x_1) < 0$, the statement of the lemma follows from Lemma A.1. □

Lemma B.2. (Comparison.) *For two sets* $\{x_k,\ k \geq 1\}$ *and* $\{z_k,\ k \geq 1\}$ *assume that* $z_k \leq x_k$ *for all* $k \geq 1$. *Let* $\mathbf{\Psi}^x = \{\psi_k^x,\ n \geq 0\}$ *be defined as in (B.1) and* $\mathbf{\Psi}^z = \{\psi_k^z,\ n \geq 0\}$ *be defined as* $\psi_0^z = 0$, $\psi_{k+1}^z = -(\psi_k^z + z_{k+1})^-$, $k \geq 0$. *Then* $\mathbf{\Psi}^z \leq \mathbf{\Psi}^x$ *or* $(\mathbf{\Psi}^x)^- \leq (\mathbf{\Psi}^z)^-$.

Acknowledgement

Both authors thank the anonymous referee for numerous suggestions and corrections that significantly improved the presentation of the manuscript.

References

[1] Atar, R., Mandelbaum, A. and Reiman, M. I. (2004). Scheduling a multiclass queue with many exponential servers: asymptotic optimality in heavy traffic. *Ann. Appl. Prob.* **14,** 1084–1134.

[2] Burkhart, M., von Rickenbach, P., Wattenhofer, R. and Zollinger, A. (2004). Does topology control reduce interference? In *Proceedings of the 5th ACM International Symposium on Mobile Ad Hoc Networking and Computing*, ACM, New York, pp. 9–19.

[3] Chen, H. and Yao, D. (2001). *Fundamentals of Queueing Networks*. Springer, New York.

https://doi.org/10.1017/jpr.2016.33 Published online by Cambridge University Press

[4] Czyzowicz, J. *et al.* (2009). On minimizing the maximum sensor movement for barrier coverage of a line segment. In *Ad-Hoc, Mobile and Wireless Networks*, Springer, Berlin, pp. 194–212.
[5] Czyzowicz, J. *et al.* (2010). On minimizing the sum of sensor movements for barrier coverage of a line segment. In *Ad-Hoc, Mobile and Wireless Networks*, Springer, Berlin, pp. 29–42.
[6] Huang, C.-F. and Tseng, Y.-C. (2005). The coverage problem in a wireless sensor network. *Mobile Networks Appl.* **10,** 519–528.
[7] Jacod, J. and Shiryaev, A. N. (2003). *Limit Theorems for Stochastic Processes*, 2nd edn. Springer, Berlin.
[8] Karatzas, I. and Shreve, S. E. (1991). *Brownian Motion and Stochastic Calculus*, 2nd edn. Springer, New York.
[9] Kranakis, E. and Shaikhet, G. (2014). Displacing random sensors to avoid interference. In *Computing and Combinatorics*, Springer, Heidelberg, pp. 501–512.
[10] Kranakis, E. *et al.* (2013). Expected sum and maximum of displacement of random sensors for coverage of a domain. In *Proceedings of the Twenty-Fifth Annual ACM Symposium on Parallelism in Algorithms and Architectures*, ACM, New York, pp. 73–82.
[11] Kumar, S., Lai, T. H. and Arora, A. (2005). Barrier coverage with wireless sensors. In *Proceedings of the 11th Annual International Conference on Mobile Computing and Networking*, ACM, New York, pp. 284–298.
[12] Kuo, H.-H. (2006). *Introduction to Stochastic Integration*. Springer, New York.
[13] Meyn, S. and Tweedie, R. L. (2009). *Markov Chains and Stochastic Stability*, 2nd edn. Cambridge University Press.
[14] Moscibroda, T. and Wattenhofer, R. (2005). Minimizing interference in ad hoc and sensor networks. In *Proceedings of the 2005 Joint Workshop on Foundations of Mobile Computing*, ACM, New York, pp. 24–33.
[15] Prabhu, N. U. (1998). *Stochastic Storage Processes: Queues, Insurance Risk, Dams, and Data Communication* (Appl. Math. (New York) **15**), 2nd edn, Springer, New York.
[16] Serfozo, R. (2009). *Basics of Applied Stochastic Processes*. Springer, Berlin.

https://doi.org/10.1017/jpr.2016.33 Published online by Cambridge University Press