Constructing an intelligent dictionary help system

E. AGIRRE, X. ARREGI, X. ARTOLA, A. DÍAZ DE ILARRAZA, K. SARASOLA and A. SOROA

Informatika Fakultatea (*Univ. of the Basque Country*)
P.K. 649, 20080 DONOSTIA (*Basque Country*)
(*e-mail*: jiparzux@si.ehu.es)

(*Received 12 February 1996; revised 18 October 1996*)

Abstract

This paper discusses different issues in the construction and knowledge representation of an intelligent dictionary help system. The Intelligent Dictionary Help System (IDHS) is conceived as a monolingual (explanatory) dictionary system for human use (Artola and Evrard, 1992). The fact that it is intended for people instead of automatic processing distinguishes it from other systems dealing with the acquisition of semantic knowledge from conventional dictionaries. The system provides various access possibilities to the data, allowing to deduce implicit knowledge from the explicit dictionary information. IDHS deals with reasoning mechanisms analogous to those used by humans when they consult a dictionary. User level functionality of the system has been specified and a prototype has been implemented (Agirre *et al*., 1994a). A methodology for the extraction of semantic knowledge from a conventional dictionary is described. The method followed in the construction of the phrasal pattern hierarchies required by the parser (Alshawi, 1989) is based on an empirical study carried out on the structure of definition sentences. The results of its application to a real dictionary has shown that the parsing method is particularly suited to the analysis of short definition sentences, as it was the case of the source dictionary. As a result of this process, the characterization of the different lexical-semantic relations between senses is established by means of semantic rules (attached to the patterns); these rules are used for the initial construction of the Dictionary Knowledge Base (DKB). The representation schema proposed for the DKB (Agirre *et al*., 1994b) is basically a semantic network of frames representing word senses. After construction of the initial DKB, several enrichment processes are performed on the DKB to add new facts to it; these processes are based on the exploitation of the properties of lexical-semantic relations, and also on specially conceived deduction mechanisms. The result of the enrichment processes show the suitability of the representation schema chosen to deduce implicit knowledge. Erroneous deductions are mainly due to incorrect word sense disambiguation.

1 Introduction

The Intelligent Dictionary Help System (IDHS) is a monolingual (explanatory) dictionary system (Artola and Evrard, 1992). Its design was conceived from the study of questions that human users would like to be answered when consulting a dictionary. The fact that it is intended for people instead of automatic processing

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

distinguishes it from other systems dealing with the acquisition of semantic knowledge from conventional dictionaries. The system provides various access possibilities to the data, allowing one to deduce implicit knowledge from the explicit dictionary information. IDHS deals with reasoning mechanisms analogous to those used by humans when they consult a dictionary.

The starting point of IDHS is a Dictionary Database (DDB) built from an ordinary French dictionary. Meaning definitions have been analysed using linguistic information from the DDB itself and interpreted to be structured as a Dictionary Knowledge Base (DKB). As a result of the parsing, different lexical-semantic relations between word senses are established by means of semantic rules (attached to the patterns); these rules are used for the initial construction of the DKB.

Once the acquisition process has been performed and the DKB built, some enrichment processes have been executed on the DKB to enhance its knowledge about the words in the language. Besides, the dynamic exploitation of this knowledge is made possible by means of specially conceived deduction mechanisms. Both the enrichment processes and the dynamic deduction mechanisms are based on the exploitation of the properties of the lexical semantic relations represented in the DKB (Agirre *et al.*, 1994b).

This paper describes both the acquisition process of semantic knowledge performed to build the DKB, and the knowledge representation model adopted in IDHS. The analysis of the definitions has been done after some empirical studies on the data contained in the DDB (Agirre *et al.*, 1994c). The analysis mechanism is mainly based on hierarchies of phrasal patterns (Alshawi, 1989), with some extensions. The parser has been implemented, and integrated with the DDB so that the definitions are directly obtained from the DDB and the different parses result of the analysis are recorded in it. Obviously, the DDB itself has played the role of lexicon for the parser. The methodology used in the process of construction of the hierarchies is briefly explained.

In the following section an overview of IDHS is given. Section 3 presents the process of construction of the DKB. The knowledge representation model and the enrichment mechanisms are fully described in sections 4 and 5. Section 6 describes some inferential aspects of the system. Finally, in section 7, some figures about the size and contents of the prototype built are presented.

2 IDHS dictionary system

IDHS is a dictionary help system intended to assist a human user in language comprehension or production tasks. The architecture of IDHS includes four modules:

- The *Dictionary Knowledge Base*, represents by means of frame structures the knowledge extracted from the Dictionary; it has been organized in different submodules. It will be explained in more detail in section 4.
- The *Inference Module*. It facilitates the inferencing capabilities of the system. The basic functionality is part of this module. In section 5 more precise explanations are given.

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

- The *Communication Module* which, on the one hand, interprets the questions posed by the user and translates them to the internal representation, and on the other, translates the answer of the system into a comprehensible text.
- The *Interface Module* which permits a friendly communication with the user.

The first two modules and a simple schema of the communication module have been specified and a prototype implemented (Agirre *et al.*, 1994a). The last module is not the focus of our work.

Figure 1 shows the general architecture presented.

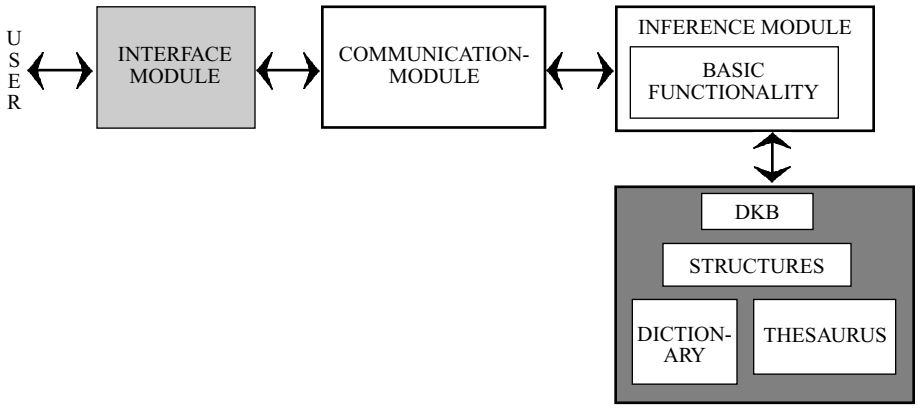


Fig. 1. Basic architecture of IDHS.

The system provides a set of functions that have been inspired by the different reasoning processes a human user performs when consulting a conventional dictionary. Definition queries, search of alternative definitions, differences, relations and analogies between concepts, thesaurus-like word search, verification of concept properties and interconceptual relationships, etc. (Arregi *et al.*, 1991; Agirre *et al.*, 1993) are some of the functions implemented.

For instance, a definition request, DDEF, takes as input a concept, an explanatory-level, a dictionary and a language, giving as output a definition. But it has different levels of explanation: textual (the result is just the text associated to that definition), local (the answer gives the network-like representation of the textual definition), and inherited (it produces the network-like representation of the textual definition plus other relations deduced from the concept hierarchy). The following examples are definition queries for the meaning of *wasp* in the LPPL French dictionary, but the requested explanatory levels are different: *textual* in the first example, *local* in the second one, and *inherited* in the third one.

```
Translator. - DDEF (|guêpe I 1|, textual, LPPL, French, ?D)
The user asks for the definition of wasp in French with
'textual' as explanatory-level
System. - D = 'insecte hyménoptère à aiguillon'
```

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

```
T. – DDEF (|guêpe I 1|, local, LPPL, French, ?D)
Definition of wasp in French with 'local' as explanatory-
level
S. – D = (and (|guêpe I 1| HYPERONYME     |insecte I I 1|)
              (|guêpe I 1| CARACTERISTIQUE |hyménoptère I I 1|)
              (|guêpe I 1| POSSESSION     |aiguillon I I 1|)
  Wasp is an hymenopterous insect with sting.
T. – DDEF (|guêpe I 1|, inherited, LPPL, French, ?D)
Definition of wasp in French with 'inherited' as
explanatory-level.
S. – D = (and (|guêpe I 1| HYPERONYME     |insecte I I 1|)
              (|guêpe I 1| CARACTERISTIQUE |hyménoptère I I 1|)
              (|guêpe I 1| CARACTERISTIQUE |articuler I 1#m|)
              (|guêpe I 1| POSSESSION     |aiguillon I 1|)
              (|guêpe I 1| POSSESSION     |patte I 1#n|)
              (|guêpe I 1| HYPONYME       |frelon I 1|)
              (|guêpe I 1| POSSESSEUR     |guêpier I 1|)
  Wasp is an articulated hymenopterous insect with sting
and legs, a bumblebee is a wasp, and a wasp's nest has
wasps.
```

The next example will show the effects of thesaurus-like search of concepts (RTHS). This function takes as input an expression of constraints, a dictionary, and a language, and returns the list of concepts that meet the constraints stated. Examples follow:

```
T. – RTHS ((and (?X HYPERONYME |instrument I 1|)
                (?X OBJECTIF |mesurer I 1|)),
           LPPL, French, ?X, ?LC)
  The user asks for nouns in French which are tools used
for measurement
S. LC = (1 basometre I 1 || dyna momètre I 1 || tétemètre I 1 |)
T. – RTHS ((and (?X HYPERONYME |consumer I 1|)
                (?X AGENT |feu I 1|)), LPPL, French, ?x, ?LC)
  The user asks for verbs in French for to consume with
agent fire
S. – LC = (|brûler I 1|, |calciner I 1|)
to burn, to blacken.
```

In summary, IDHS can be seen as a repository of dictionary knowledge apt to be accessed and exploited in several ways. The system has been implemented using the KEE knowledge engineering environment.

All the knowledge represented in IDHS has been acquired from a conventional dictionary by means of parsing dictionary definitions using NLP techniques. Two different steps were distinguished when building the DKB. First, the extraction of the information from the dictionary and its recording into a relational database: the Dictionary Database (DDB). This DDB was the starting point in order to create, in

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

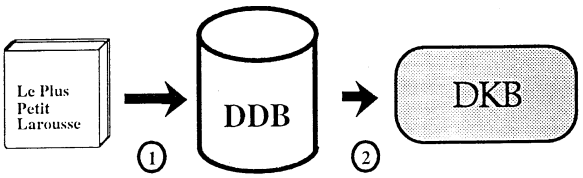


Fig. 2. From the MRD to the DKB.

step 2 (see Figure 2), the object-oriented Dictionary Knowledge Base, that is, in fact, the support of our deduction system.

Focusing on the step 2 (construction of the DKB from the DDB) two phases are distinguished. Firstly, information contained in the DDB is used to produce an initial DKB. General information about the entries obtained from the DDB (POS, usage, examples, etc.) is conventionally represented – attribute-value pairs in the frame structure – while the semantic component of the dictionary, i.e. the definition sentences, has been analysed and represented as an interrelated set of concepts. In this stage the relations established between concepts could still, in some cases, be of a lexical-syntactic nature. In a second phase, the semantic knowledge acquisition process is completed using the relations established in the initial DKB. The purpose of this phase is to perform lexical and syntactical disambiguation, showing that semantic knowledge about hierarchical relations between concepts can be determinant for this.

3 Building the dictionary knowledge base

The starting point of this system is a small monolingual French dictionary (*Le Plus Petit Larousse*, Paris: Librairie Larousse, 1980). This dictionary consists of nearly 23,000 senses related to almost 16,000 entries. Each entry contains the following components: part of speech (POS), meaning definition or cross-references to synonyms; marks of discourse domain usage; examples (14% of entries), etc. Among the definitions, 74% have four or less than four words. The average number of words per definition is 3.27.

The dictionary was recorded in a relational database: the Dictionary Database (DDB). This DDB is the basis of every empirical study that has been developed to design the final representation for the intelligent exploitation of the dictionary. The information attached in the DDB to each word occurrence in meaning descriptions was completed following a mainly automatic tagging process. Every definition word occurrence was attached to its canonical form (homograph and sense numbers included, when possible). First, an automatic procedure run on the definitions made the attachments, using information about the entries obtained from the DDB itself. Secondly, a great number of definition word occurrences were tagged with corresponding POS's. This had been automatically possible when the canonical form attached to the word belonged to a POS only. After that, some cases remained unsolved, due mainly to morphological problems – no morphological treatment has been carried out – or to the no existence of some entries in the source dictionary. As

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

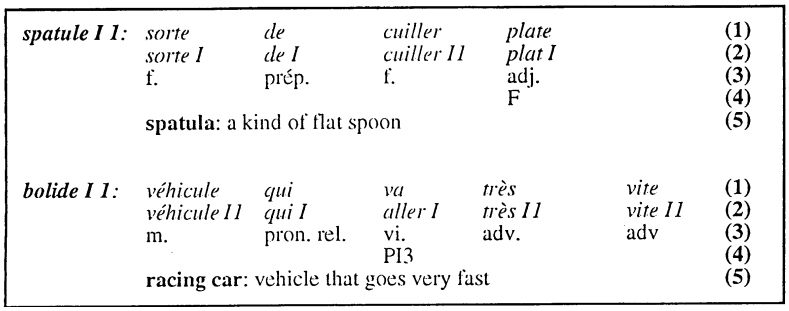


Fig. 3. Two different entries in the DDB after tagging and disambiguation. (1) Definition text; (2) canonical forms; (3) POS (where ***f*** is attached to feminine nouns, ***m*** to masculin nouns, ***vi*** to intransitive verbs and **pron. rel.** to relative pronouns); (4) ortho-morphological alterations (where ***F*** means feminine of an adjective and ***PI3*** means third person singular of present tense); (5) English translation.

a result of this process, more than 85% of word occurrences were tagged, and in 70% of definitions all words were tagged. Figure 3 shows two different entries and the information associated in the database to their definition words.

The definition sentences, that is the semantic component of the dictionary, have been analysed in the process of transformation of the data contained in the DDB to produce the DKB. The analysis mechanism used is based on hierarchies of phrasal analysis patterns (Alshawi, 1989). This mechanism seems to be especially adequate to derive and make use of partial analysis of dictionary definitions. Nevertheless, our implementation includes some modifications due mainly to its integration in the environment of the DDB, such as: (a) the definitions are directly obtained from the DDB; (b) the different parses, which are the result of the analysis, are recorded in it; and (c) the DDB itself has played the role of lexicon for the parser supplying the POS's corresponding to words from the DDB.

The pattern analyser includes the possibility to add a predicate name to syntactic elements. The use of this predicate allows the user to restrict the matching with other types of information not purely syntactic but present in the DDB.

With regard to the construction of the semantic structure associated to each pattern, we distinguish three types of treatment:

(a) Treatment associated to definitions which follow a classic schema. The links between the *definiendum* and the *genus* are of type *subclass* and properties described by the *differentia* are expressed by means of attributes.
(b) Treatment associated to synonymic definitions. In this case, an attribute representing the synonymic relation is used.
(c) Treatment associated to definitions with a specific formula (specific relators). Different kind of attributes are defined in order to represent the information conveyed by the formula.

Figure 4 gives an example of pattern rule (RN110532) defined in the hierarchy for analysis of noun entry definitions along with its Semantic Structure Construction Rule (SSCR). It covers noun entries defined by means of the words 'sorte' 'de',

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

```
;;;   Pattern RN110532 (noun definitions)
;;;         (N "sorte" "de" (GN 1) (M&&))
;;;   Corresponding SSCR:
      `(RN110532
;;;   Units to be created:
            ((DEFINIENDUM)
            (CONF1 CONF T (,(CAN '(GN 1 ((NOM 1))))) (NOMINALES))
            (REF1 REF ,(CAN '(GN 1 ((ADJ 1)))) (QUALITES))
;;;   Value attachment:
            ((,DEFINIENDUM DEF-SORTEDE ,CONF1)
             (,CONF1 CARACTERISTIQUE ,REF1))
```

Fig. 4. Simplified example of pattern and semantic structure construction rule (SSCR). (English gloss: GN = Noun Phrase, NOM = Noun, NOMINALES = Nominals, QUALITIES = Qualities).

followed by a noun phrase (GN, *groupe nominal*) and an arbitrary sequence of words which match the wildcard M&&.

The matching of the definition text of ***spatule I 1***, *sorte de cuiller plate* (spatula: *a kind of flat spoon*, see section 2) against the pattern RN110532 will give the following structure to be stored in the database:

```
(RN110532 ((GN 1 2 2 ((NOM 1 2 1) (ADJ 1 3  1)))))
```

In this list structure the first element represents the identifier of the pattern matched by the definition. The second element is an expression of the bindings established between the match items in the pattern and the actual components of the definition text. In this case, the only binding established is that corresponding to the (GN 1) item, matched with the sequence *cuiller plate*.

The semantic interpretation of each pattern is composed of two different parts: the specification of the representation units to be created, and the value attachment to the different attributes of those units. In the example, there are three new units to be created: DEFINIENDUM represents the concept defined, CONF1 stands for the phrasal concept unit representing the phrasal component matched with the (GN 1) item in the pattern, and REF1 -*plate*- represents the concept matched with the (GN 1 ((ADJ 1))) item. CONF1 is created as a noun phrasal concept unit depending hierarchically from its nuclear concept, -*cuiller*-, represented by (GN 1 ((NOM 1))) (whenever a phrasal concept is created these hierarchical links are automatically established); REF1 is created as a quality entity designed by its corresponding canonical form.

The value attachment part, among other things, establishes the specific relation DEF-SORTEDE between the definiendum and the unit CONF1, and the qualification relation (CARACTERISTIQUE) between CONF1 and REF1.

In the following the building process of the hierarchies for the parser is described. This process is of special relevance to obtain the best results from the analysis mechanism, since 'intuition' about the structures to be found in definition sentences doesn't seem to be sufficient to build a well founded hierarchy of patterns.

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

3.1 Method for the construction of pattern hierarchies

The method to construct the pattern hierarchies is based on semantic criteria: the objective is to find different types of syntactic structures used for the different meaning descriptions which are semantically significant. The main goal of the analysis is the characterization of the lexicographic language used in the definition texts to: (a) specify SSCRs for the most frequent syntactic structures found in definitions; (b) specify SSCRs for definitions containing elements able to work as specific relators between concepts (Vossen *et al.*, 1989), although their absolute frequency is not very high; and (c) extract partial – but correct – information from those definitions not completely parsable.

Three kinds of statistical measures were calculated to check the semantic typology intuitively established, and search for more concrete words and phrase structures associated to each type of meaning description in the context of LPPL. They are the following:

- *Frequency lists of POS sequences in definition sentences*
  Taking advantage of the DDB structure it was quite easy to obtain a frequency list of different sequences of POSs used in sense definitions. As different pattern hierarchies had to be built for noun, verb, adjective, and adverb entries, four different lists were obtained.
- *Frequency lists of sequences of phrasal structures in definition sentences*
  A specially designed and implemented bottom-up parser obtains a sequence of phrasal components for each definition.
  Frequency data on POS sequences and phrasal structures conveniently sorted were adequate starting points to define pattern rules for the most frequent syntactic schemata.
- *Finding specific relators*
  Frequencies of word occurrences in definitions were calculated for noun, verb, adjective, and adverb entries. These frequency data and related work (Calzolari, 1984; Markowitz *et al.*, 1986; Vossen *et al.*, 1989) have guided the search for specific meta-linguistic relators in this French dictionary. The specific relators correspond roughly to the notion of 'shunters' and 'linkers' in several known works (Vossen *et al.*, 1989).
  Particularized research on these elements showed the structure of their syntactic realizations in the definitions and led to the specification of the SSCRs for them. Unlike the case of classical definitions, the semantic interpretation for this kind of definitions is built in terms of these relators. For instance, *MEMBRE-DE* (member of) for noun entries, *FAIRE* (factitive) for verbs, or *QUI* (who) for adjectives are among these specific relators.

There was also another useful disambiguating application for those frequency lists: a new process of POS tagging in definition words. Figure 5 shows that there were 36 definitions matching the schema (NOM PREP ART X) where X means 'an ambigous POS'. The schema (NOM PREP ART NOM) represented 146 noun definitions and was the only one with four words and starting with NOM PREP ART. After an

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

NOM	2223	NOM+QUAL-PAR+PREP.+ART.+NOM	72
NOM+PREP.+NOM	786	QUALIFICATIF+NOM+PREP.+NOM	68
NOM+QUALIFICATIF	656	NOM+PREP.+NOM+VIRG.+NOM	65
NOM+VIRG+NOM	578	NOM+PREP.+NOM+PREP.+X	64
NOM+PREP.+VERB/INF	575	NOM+PREP.+NOM+X+X	62
NOM+QUAL-PAR	479	NOM+PREP.+NOM+QUALIFICATIF	58
QUALIFICATIF+NOM	274	NOM+PREP.+X+PREP.+NOM	49
NOM+PREP.+X	273	NOM+PREP.+VERBE/INF.+ART.+NOM	43
NOM+ART. CONTR.+NOM	252	NOM+QUALIFICATIF+PREP.+X+NOM	39
NOM+PREP.+ART. INDEF+NOM	237	NOM+PREP.+X+NOM+VIRG.	38
NOM+PREP.+ART.+NOM	146	NOM+NOM	37
NOM+PREP.+NOM+QUAL-PAR	109	QUAL-NOM	37
NOM+PREP.+PR.DEM.+PR. REL.+VERBE/P13	107	NOM+PREP.+ART.+X	36
NOM+PREP.+NOM+PREP.+NOM	86	NOM+X+PREP.+NOM	36
PR. REL.+VERBE/P13	77	QUALIFICATIF+NOM+X	36
NOM+QUAL-PAR+PREP.+ART. INDEF+NOM	74	NOM+PREP.+ART.+NOM+PREP	34
X+X	74		

Fig. 5. The most frequent syntax schemata found in noun definitions. (English gloss: ART. = article, ART. CONTR = Contracted article, ART. INDEF = Indefinite art., NOM = Noun, PR.DEM. = dem. pronoun, PR. REL = relative pronoun, QUALIFICATIF = qualifying adj., QUAL-PAR = participle or qualifying adjective, VERBE/P13 = verbal form in 3rd person singular of present tense, VIRG = Comma, X = ambiguous POS).

analysis of this type of definitions it was realized that all the Xs could be tagged as NOM. Similar disambiguation was done for the most frequent schemata with X. After several steps of disambiguation/list-building the final result was the complete tagging of more than 16,000 definitions.

The lexical-semantic relations between different concepts extracted from the analysis of the source dictionary are grouped into two classes:

Paradigmatic relations

(a) Synonymy and Antonymy.
(b) Taxonomic relations: Hypernymy/Hyponymy (obtained from definitions of type 'genus et differentia'), and Taxonymy expressed by means of specific relators such as *SORTE-DE* or *ESPECE-DE*.
(c) Meronymy.
(d) Others: Gradation (for adjectives and verbs), Equivalence (adjectives with past participle), Factitive & Reflexive (for verbs), Lack and Reference (to previous sense).

Syntagmatic relations (*those that relate concepts belonging to different POSs*)

(a) Derivation
(b) Relations between concepts without any morphological relation: case relation.
(c) Others: Attributive (for verbs), Lack and Conformity.

3.2 Evaluation of the analysis: results and problems

The hierarchies created have already been used for the analysis of all the noun, verb, and adjective definitions in the DDB. In this section a summary description of the

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

created hierarchies is given along with some comments on the results of their application to the analysis of definitions.

The hierarchy devoted to analyse noun definitions is formed with 65 patterns, 49 different patterns have been defined to analyse verb definitions, and 45 for adjectives. Among these, very general patterns can be found, i.e. noun phrase based patterns for noun definitions, verb phrase based ones for verbs and so on, along with very specific patterns derived from the empirical studies described in section 4.

To get an idea of the patterns created in the three hierarchies, it can be said that 37 patterns for nouns, 21 for verbs and 37 among the ones devoted to adjectives are specific patterns. Within these can be found patterns like (‘partie’ ‘de’ (GN 1) (M&&)) for noun definitions (‘commencer’ ‘à’ (GV 1)) for verbs or (‘sans’ (GN 1)) for adjectives. Among these specific patterns also are considered those patterns defined in order to cope with synonymic definitions, which are of great importance in a small dictionary like the LPPL.

Together with pattern hierarchies 15 subsidiary patterns – mainly devoted to describe phrasal component structures – have been defined. These subsidiary patterns have also shown very useful when grouping under the same label different meta-linguistic structures destined to cope with specific relations stated in definitions.

Given that definitions in the LPPL are short, the aim has been to get the most from the analysis process. Therefore, the wildcard of the pattern-matching (meta-character M&&) has been used in a very limited way placing it only in the last position of patterns. The correctness of partial analyses has not yet been evaluated exhaustively but it has been observed that the indiscriminate use of ‘everything matching items’ in patterns, especially after facultative items, can lead to incorrect parses and hence, incorrect semantic structure assignments.

Although it is a partial parsing procedure, 57.76% of noun definitions, 79.8% of verbs and 69.04% of those corresponding to adjectives have been totally analysed in this application (no use of M&&). The meta-character M&& matching zero or more words in a definition text has been used more often in patterns devoted to noun definitions.

In Table 1 the results of the analysis are presented, grouping the definitions according to the type of pattern they match. With this technique of partial parsing, the parse is considered successful when an initial phrase structure is recognized, which in general contains the genus or superordinate of the defined sense. This is not so for the case of specific meta-language constructions, whose corresponding semantic structure is built in a specific way and which deserve specific patterns in the hierarchies.

As is seen, the failure rate is quite low, especially for verb definitions. This fact indicates, in the opinion of the authors, that the set of syntactic structures used by the lexicographer to write verb definitions is more reduced than those of other parts of speech definitions. The low failure rate also seems due to the fact that verb definition sentences are shorter in average than those of nouns.

Group 1 includes definition sentences that have been recognized by patterns based on certain meta-language level structures. Synonymic definitions are also considered to be in this level. In fact, these definitions are built using some meta-linguistic ways

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

Table 1. *Results of the analysis*

	NOUN DEFS.		VERB DEFS.		ADJ. DEFS.	
		%		%		%
Failure	1086	7.9	105	2.00	527	16.35
Group 1	4657	33.88	2625	50.02	2370	73.51
Group 2	8001	58.22	2517	47.97	327	10.14
Totals	13744		5247		3224	

Table 2. *Analysis ambiguity level*

Number of patterns	NOUN DEFS.		VERB DEFS.		ADJ. DEFS.	
		%		%		%
1	8033	58.45	4322	82.37	2596	80.52
2	4183	88.88	810	97.81	579	98.48
3	1003	96.18	32	98.42	29	99.40
4	464	99.56	75	99.85	20	100.00

of expression, such as definitions containing a single word, or commas used as boundaries between words belonging to the same part of speech of the definiendum. This group is particularly relevant given that these meta-linguistic features offer a straightforward way to attach to them a suitable semantic interpretation expressed in terms of themselves. In this context, one should note the high percentage of adjective definitions in Group 1. This reveals that the use of synonymic definitions is very frequent in the case of adjectives (33.81%) and also that the utilization of certain fixed definition structures is higher here than for the other parts of speech: 39.7% of adjective definitions have been matched with only 27 patterns of this kind.

Group 2 concerns definitions expressed in the Aristotelian way of *genus et differentia specifica*. The possibility of partial parsing, where some differential aspects of the definition are eventually lost, is highly exploited in this case. The semantic interpretation given to all definitions included in this group takes the head of the first phrase structure (noun, verb or adjective phrase) as the *genus* of the defined word.

Table 2 presents the level of ambiguity of the results obtained for the analysis of nouns, verbs and adjectives. The figures indicate the number of definitions matched with, at most, four different patterns along with the accumulative percentage on the right. This multiplicity of analyses is due either to the possibility that complex categories have different parses at the same pattern or to the fact that patterns placed on different branches of the hierarchy may be matched with the same definition. Obviously, there is no ambiguity with different patterns matched on the same branch.

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

In this case, the parser chooses only the more specific one rejecting all the rest. Although all the syntactically correct analyses are recorded in the database, to construct the DKB only the first one is chosen as the right interpretation. This means that it is essential to arrange the different analyses so that the semantically correct one be on top. This can be done by arranging carefully the patterns on the same hierarchy level, given that results are ordered by the parser according to the hierarchy. Anyway, results are revised manually before DKB construction, in order to solve remaining incorrect assignments of the semantic interpretation.

4 Representation of the dictionary knowledge: the DKB

The knowledge representation schema chosen for the DKB of IDHS is composed of three elements, each of them structured as a different knowledge base:

- KB-THESAURUS is the representation of the dictionary as a semantic network of frames, where each frame represents a *one-word concept* (word sense) or a *phrasal concept*. Phrasal concepts represent phrase structures associated to the occurrence of concepts in meaning definitions. Frames – or units – are inter-related by slots representing lexical-semantic relations such as synonymy, taxonomic relations (hypernymy, hyponymy, and taxonymy itself), meronymic relations (part-of, element-of, set-of, member-of), specific relations realized by means of meta-linguistic relators, casuals, etc. Other slots contain phrasal, meta-linguistic and general information.
- KB-DICTIONARY allows access from the dictionary word level to the corresponding concept level in the DKB. Units in this knowledge base represent the entries (words) of the dictionary and are directly linked to their corresponding senses in KB-THESAURUS.
- KB-STRUCTURES contains meta-knowledge about concepts and relations in KB-DICTIONARY and KB-THESAURUS: all the different structures in the DKB are defined here specifying the corresponding slots and describing the slots by means of facets that specify their value ranges, inheritance modes, etc. Units in KB-THESAURUS and KB-DICTIONARY are subclasses or instances of classes defined in KB-STRUCTURES.

Figure 6 gives a partial view of the three knowledge bases which form the DKB with their correspondent units and their inter/intra relationships.

In the KB-THESAURUS, some of the links representing lexical-semantic relations are created when building the initial version of the knowledge base, while others are deduced later by means of specially conceived deduction mechanisms.

When a dictionary entry like ***spatule I 1:*** *sorte de cuiller plate* (*spatula*: *a kind of flat spoon*) is treated, new concept units are created in KB-THESAURUS (and subsidiarily in KB-DICTIONARY) and linked to others previously included in it. Due to the effect of these links new values for some properties are propagated through the resulting taxonomy.

In the example, although it is not explicit in the definition, *spatule* is 'a kind of' *ustensile* and so it will inherit some of its characteristics (depending upon the

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

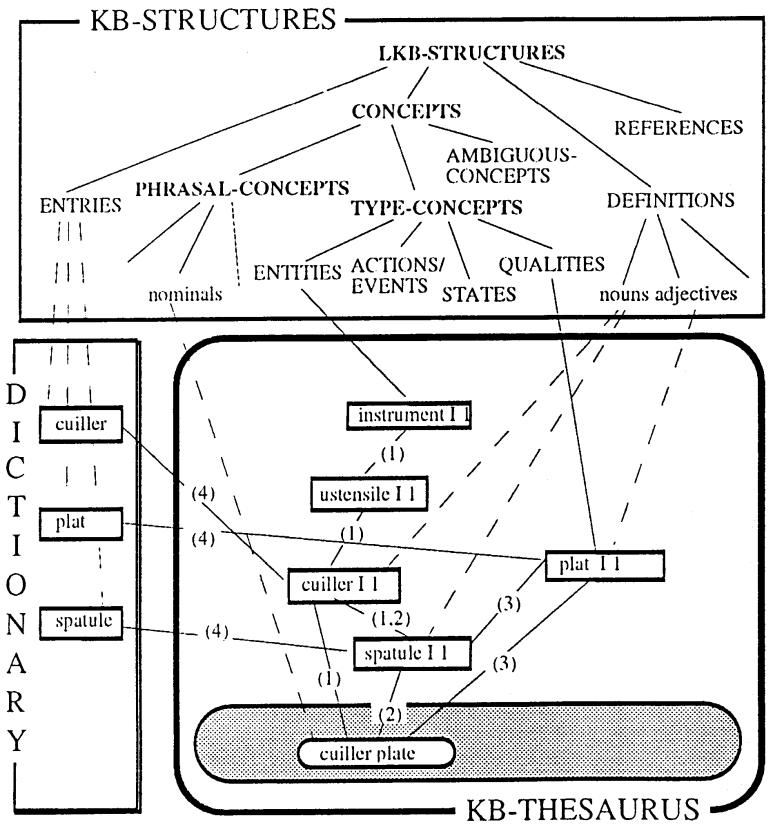


Fig. 6. The Dictionary Knowledge Base. ___SUBCLASS link; – – – MEMBER-OF link (instance); (1) Taxonomic Relation: HYPERNYM/HYPONYM; (2) Specific (meta-linguistic) relation: SORTE-DE / SORTE-DE + INV (KIND-OF/KIND-OF + INV); (3) CARACTERISTIQUE / CARACTERISTIQUE + INV (PROPERTY / PROPERTY + INV) relation; (4) MOTS-ENTREE / SENS (ENTRY-WORD / WORD-SENSE) relation. (English gloss: cuiller = spoon, cuiller plate = flat spoon, plat = flat, spatule = spatula, ustensile = instrument).

inheritance role of each attribute). Figure 6 also shows the types of concepts used: *spatule I 1* and *cuiller I 1* are noun definitions and considered subclasses of ENTITIES, while *plat I 1* (an adjective) is a subclass of QUALITIES. The phrasal concept unit representing the noun phrase *cuiller plate* is treated as a hyponym of its nuclear concept (*cuiller I 1*).

4.1 KB-STRUCTURES: the meta-knowledge

This knowledge base reflects the hierarchical organization of the knowledge included in the DKB.

We will focus on the LKB-STRUCTURES class which defines the data types used in KB-DICTIONARY and KB-THESAURUS, and that organizes the units belonging to these knowledge bases into a taxonomy.

Slots defined in KB-STRUCTURES have associated aspects such as the value

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

class, the inheritance role determining how values in children's slots are calculated, and so on. Each lexical-semantic relation – represented by an attribute or slot – has its own inheritance role. For instance, the inheritance role of the CARACTERISTIQUE relation states that every concept inherits the union of the values of the hypernyms for that relation, while the role defined for the SYNONYMES relation inhibits value inheritance from a concept to its hyponyms.

The subclasses defined under LKB-STRUCTURES are the following:

- ENTRIES, that groups dictionary entries belonging to KB-DICTIONARY;
- DEFINITIONS, that groups word senses classified according to their POS;
- REFERENCES, concepts created in KB-THESAURUS due to their occurrence in definitions of other concepts ('definitionless');
- CONCEPTS, that groups, under a conceptual point of view, word senses and other conceptual units of KB-THESAURUS.

The classification of conceptual units under this last class is as follows:

- **TYPE-CONCEPTS** correspond to Quillian's (1968) 'type nodes'; this class is, in fact, like a superclass under which every concept of KB-THESAURUS is placed. It is further subdivided into the classes ENTITIES, ACTIONS/EVENTS, QUALITIES and STATES, that classify different types of concepts.
- **PHRASAL-CONCEPTS** is a class that includes concepts similar to Quillian's 'tokens' – occurrences of type concepts in the definition sentences. Phrasal concepts are the representation of phrase structures which are composed by several concepts with semantic content. A phrasal concept is always built as a subclass of the class which represents its head (the noun of a noun phrase, the verb of a verb phrase, and so on), and integrated in the conceptual taxonomy. Phrasal concepts are classified into NOMINALS, VERBALS, ADJECTIVALS, and ADVERBIALS.

  For instance, |plante I 1#3| is a phrasal concept (see Figure 7), subclass of the type concept |plante I 1|, and represents the noun phrase '*une plante d'ornement*' (*an ornamental plant*.)
- Finally, the concepts that, after the analysis phase, are not yet completely disambiguated (lexical ambiguity), are placed under the class **AMBIGUOUS-CONCEPTS**, which is further subdivided into the subclasses HOMOGRAPHE (e.g. |faculté ? ?|), SENSE (|panser I ?|), and COMPLEX (|donner I 5/6|), in order to distinguish them according to the level of ambiguity they present.

The links between units in KB-THESAURUS and KB-DICTIONARY are implemented by means of slots tagged with the name of the link they represent. These slots are defined in the different classes of KB-STRUCTURES.

The representation model used in the system is made up of two levels:

- ***Definitory level***, where the surface representation of the definition of each sense is made. Morphosyntactic features like verb mode, time, determination, etc. are represented by means of facets attached to the attributes. The definitory level is implemented using *representational attributes*. Examples of this kind of attributes are: DEF-SORTED, DEF-QUI, CARACTERISTIQUE and AVEC.

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

- ***Relational level***, that reflects the relational view of the lexicon. It supports the deductive behaviour of the system and is made up by means of *relational attributes*, that may eventually contain deduced knowledge. These attributes, defined in the class TYPE-CONCEPTS, are the implementation of the interconceptual relations: ANTONYMES, AGENT, CARACTERISTIQUE, SORTE-DE, CE-QUI, etc.

4.2 KB-DICTIONARY: from words to concepts

This knowledge base contains the links between each dictionary entry and its senses (see link 4 in Figure 6).

4.3 KB-THESAURUS: the concept network

KB-THESAURUS stores the concept network that is implemented as a network of frames. Each node in the net is a frame that represents a conceptual unit: one-word concepts and phrasal concepts.

The arcs interconnect the concepts and represent lexical-semantic relations; they are implemented by means of frame slots containing pointers to other concepts. Hypernym and hyponym relations have been made explicit, making up a *concept taxonomy*. These taxonomic relations have been implemented using the environment hierarchical relationship, in order to get inheritance automatically.

Let us show an example. The representation of the following definition:

géranium I 1: *une plante d'ornement*

requires the creation of two new conceptual units in THESAURUS: the one which corresponds to the definiendum and the phrasal concept which represents the noun phrase of the definition. Moreover, the units which represent *plante* and *ornement* are to be created also (if they have not been previously created because their occurrence in another definition).

Let us suppose that three new units are created: |géranium I 1|, |plante I 1#3| and |ornement I 1|. Attributes in the units may contain facets (attributes for the attributes) used in the definitory level to record aspects like determination, genre and so on, but also to establish the relations between definitory attributes with their corresponding relational, or to specify the certainty that the value in a representational attribute has to be 'promoted' to a corresponding relational (see below the case of the slot DE in |plante I 1#3|).

The following is given the composition of the frames of these three units at the definitory level of representation (slots are in small capitals whereas facet identifiers are in italics):

|géranium I 1|
MEMBER.OF: NOMS
GROUPE-CATEGORIEL: NOM
CLASSE-ATTRIBUT: *INFO-GENERALE*

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

TEXTE-DEFINITION: 'une plante d'ornement'
CLASSE-ATTRIBUT: *INFO-GENERALE*
DEF-CLASSIQUE: |plante I 1#3|
CLASSE-ATTRIBUT: *DEFINITOIRES*
DETERMINATION: *UN*
GENRE: *F*
RELATIONNELS-CORRESPONDANTS: *DEFINI-PAR*

|plante I 1#3|
SUBCLASS.OF: |plante I 1|
MEMBER.OF: NOMINALES
TEXTE: 'plante d'ornement'
CLASSE-ATTRIBUT: *INFO-GENERALE*
DE: |ornement I 1|
CLASSE-ATTRIBUT: *SYNTAGMATIQUES*
RELATIONNELS-CORRESPONDANTS: *ORIGINE*, *POSSESSEUR*, *MATIERE*, *OBJECTIF*
OBJECTIF: 0.9

|ornement I 1|
MEMBER.OF: REFERENCES

Before showing the representation of these units at the relational level, it has to be said that after the initial DKB has been built some deductive procedures have been executed: e.g. deduction of inverse relationships, taxonomy formation, etc. That is to say that in Figure 7, where the relational view is presented, the relations deduced by these procedures are also represented.

The conceptual units in THESAURUS are placed in two layers (see Figure 7),

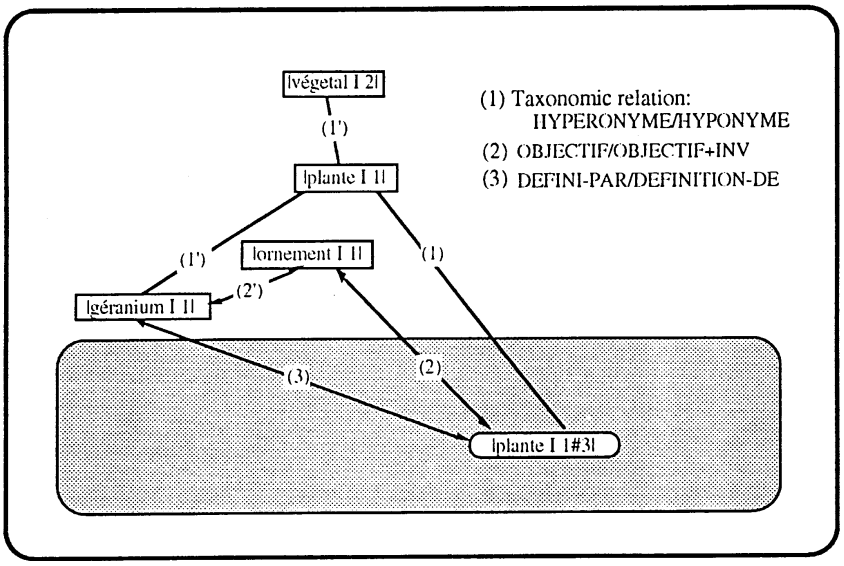


Fig. 7. Relational view of the concept |géranium I 1| (in the THESAURUS net). (English gloss: DEFINI-PAR = defined by, DEFINITION-DE = definiton of, géranium = geranium, ornement = ornament, plante = plant, végetal = vegetable).

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

recalling the two planes of Quillian. The upper layer corresponds to type concepts, whereas in the lower, phrasal concepts are placed. Every phrasal concept is placed in the taxonomy directly depending from its nuclear concept, as a hyponym of it.

It is interesting to notice in the figure the relation of *conceptual equivalence* established between |géranium I 1| and |plante I 1#3| (link labelled (3)). These units represent, in fact, the same concept because |plante I 1#3|, standing for '*une plante d'ornement*', is the definition of |géranium I 1|.

The frame of |géranium I 1| at the relational level of representation takes the following aspect, once the relational attributes have been (partially) completed:

|géranium I 1|
SUBCLASS.OF: ENTITES, |plante I 1|
MEMBER.OF: NOMS
GROUPE-CATEGORIEL: NOM
CLASSE-ATTRIBUT: *INFO-GENERALE*
TEXTE-DEFINITION: 'une plante d'ornement'
CLASSE-ATTRIBUT: *INFO-GENERALE*
DEF-CLASSIQUE: |plante I 1#3|
CLASSE-ATTRIBUT: *DEFINITOIRES*
DETERMINATION: *UN*
GENRE: *F*
RELATIONNELS-CORRESPONDANTS: *DEFINI-PAR*
DEFINI-PAR: |plante I 1#3|
CLASSE-ATTRIBUT: *RELATIONNELS*
INVERSES-CORRESPONDANTS: *DEFINITION-DE*
OBJECTIF: |ornement I 1|
CLASSE-ATTRIBUT: *RELATIONNELS*
INVERSES-CORRESPONDANTS: *OBJECTIF+INV*

Let us show now another example. It is the case of two definitions stated by means of two different stereotyped formulae belonging to the lexicographic meta-language. Many verbs in the LPPL are defined by means of a formula beginning with '*rendre*' and many nouns with one beginning with '*qui*'. The definitions selected for this example correspond to the entries ***publier I 1*** and ***ajusteur I 1***, which are represented at the definitory level using the meta-language attributes DEF-RENDRE and DEF-QUI respectively:

publier I 1: *rendre public* (*publish*: *to make public*)
ajusteur I 1: *qui ajuste des pièces de métal* (*metalworker*: *who adjusts pieces of metal*)

The frame corresponding to |publier I 1| is the following:

|publier I 1|
MEMBER.OF: VERBES
GROUPE-CATEGORIEL: VERBE
CLASSE-ATTRIBUT: *INFO-GENERALE*
TEXTE-DEFINITION: 'rendre public'
CLASSE-ATTRIBUT: *INFO-GENERALE*

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

DEF-RENDRE: |public I 1|
CLASSE-ATTRIBUT: *DEFINITOIRES*
RELATIONNELS-CORRESPONDANTS: *RENDRE*

where it can be seen that no phrasal concept is involved because the link (DEF-RENDRE) is established directly between |publier I 1| and |public I 1|. However, in the case of the definition of *ajusteur I* 1, two phrasal concepts are created: the attribute DEF-QUI points to the phrasal concept |ajuster I 1#1|, representing '*ajuster des pièces de métal*' and this phrasal concept, in turn, has a syntagmatic attribute (OBJET) pointing to a nominal that represents '*pièce de métal*'. Let us show the frames involved in this last case:

|**ajusteur I 1**|
MEMBER.OF: NOMS
GROUPE-CATEGORIEL: NOM
CLASSE-ATTRIBUT: *INFO-GENERALE*
TEXTE-DEFINITION: 'qui ajuste des pièces de métal'
CLASSE-ATTRIBUT: *INFO-GENERALE*
DEF-QUI: |ajuster I 1#1|
CLASSE-ATTRIBUT: *DEFINITOIRES*
MODE: *IND*
ASPECT: *NT*
TEMPS: *PRES*
PERSONNE: 3
RELATIONNELS-CORRESPONDANTS: *QUI*
|**ajuster I 1#1**|
SUBCLASS.OF: |ajuster I 1|
MEMBER.OF: VERBALES
TEXTE: 'ajuster des pièces de métal'
CLASSE-ATTRIBUT: *INFO-GENERALE*
OBJET: |pièce I 1#2|
CLASSE-ATTRIBUT: *SYNTAGMATIQUES*
DETERMINATION: *UN*
NOMBRE: *PL*
RELATIONNELS-CORRESPONDANTS: *THEME*
|**pièce I 1#2**|
SUBCLASS.OF: |pièce I 1|
MEMBER.OF: NOMINALES
TEXTE: 'pièce de métal'
CLASSE-ATTRIBUT: *INFO-GENERALE*
DE: |métal I 1|
CLASSE-ATTRIBUT: *SYNTAGMATIQUES*
RELATIONNELS-CORRESPONDANTS: *ORIGINE*, *POSSESSEUR*, *MATIERE*, *OBJECTIF*
MATIERE: 0.9

Frequently, phrasal concepts represent 'unlabelled' concepts, i.e. they indeed represent concepts that do not have a significant in the language. For instance, there

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

is not, at least in French, a verbal concept meaning '*ajuster des pièces de métal*' nor a noun meaning '*pièce de métal*'. However, this is not the case of the phrasal concepts that are linked to type concepts by means of the relation DEFINI-PAR/DEFINITION-DE, because there, the phrasal concept is, in fact, another representation of the concept being defined (see the example of the definition of *géranium I 1* above). In the representation model proposed in this work, phrasal concepts denote concepts that are typically expressed in a periphrastic way, and that do not have necessarily any corresponding entry in the dictionary.[1]

Another interesting point related to the creation of these phrasal concepts is the maintenance of direct links between a concept and all the occurrences of this concept in the definition sentences of other concepts. It gives, in fact, a virtual set of usage examples that may be useful for different functions of the final system.

5 Enrichment process performed on the DKB

In this section the enrichment processes accomplished on the DKB are explained. Two phases are distinguished: (a) the enrichment obtained during the construction of the initial DKB, and (b), where different tasks concerning mainly the exploitation of the properties of synonymy and taxonymy have been performed.

5.1 Enrichment obtained during the construction of the initial DKB

KB-THESAURUS itself, represented – as a network – at the relational level, can be considered an enrichment of the definitory level because, while the DKB was built, the following processes have been performed:

- Values coming from the definitory level have been promoted to the relational level.
- Values coming from the unit representing the definiens have been transferred to the corresponding definiendum unit.
- The maintenance of the relations in both directions has been automatically guaranteed.
- The concepts included in REFERENCES have been directly related to other concepts.
- The taxonomy of concepts has been made explicit, thus obtaining value inheritance.

5.2 Second phase in the enrichment of the DKB

Several processes have been carried out to infer new facts to be asserted in the DKB.[2] The enrichment obtained in this phase concerns the two following aspects:

[1] This could be very interesting also, in the opinion of the authors, in a multilingual environment: it is possible that, in another language, the concept equivalent to that which has been represented by the phrasal concept |pièce I 1#2| has its own significant, a word that denotes it. In this case, the phrasal concept based representation may be useful to represent the equivalence between both concepts.

[2] By means of rules fired following a forward chaining strategy.

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

- Exploitation of the properties of the synonymy (symmetric and transitive).
- Enlargement of the concept taxonomy based on synonymy.

Another aspect that has been considered to be exploited in this phase is that of disambiguation. The use of the lexical-semantic knowledge about hierarchical relations contained in the DKB can be determinant in order to reduce the level of lexical and syntactical ambiguity.[3] Heuristics based on the taxonomic and synonymic knowledge obtained previously have been considered in this phase. Some of them have been designed, implemented and evaluated in a sample of the DKB.

6 Inferential aspects: dynamic deduction of knowledge

Dynamic acquisition of knowledge deals with the knowledge not explicitly represented in the DKB and captured by means of especially conceived mechanisms which are activated when the system is to answer a question posed by the user (Arregi *et al.*, 1991). The following aspects are considered:

- Inheritance (concept taxonomy).
- Composition of lexical relations.
- Links between concepts and relations: users are allowed to use actual concepts to denote relationships (and not only primitive relations).
- Ambiguity in the DKB: treatment of remaining uncertainty.

In the following, some aspects concerning to the second point will be discussed.

In IDHS, the relationships among the different lexical-semantic relations can be easily expressed in a declarative way. It is the way of expressing these relationships that is called the *composition of lexical relations*. From an operative point of view, this mechanism permits the dynamic exploitation – under the user's requests – of the properties of the lexical relations in a direct manner. It is, in fact, a way of acquiring implicit knowledge from the DKB.

The declarative aspect of the mechanism is based on the definition of triples: each triple expresses a relationship among different lexical-semantic relations. These triples have the form (R_1 R_2 R_3), where R_i represents a lexical relation.[4] The operative effect of these declarations is the dynamic creation of transitivity rules based on the triples stated. The general form of these rules is the following:

if X R_1 Y **and** Y R_2 Z **then** X R_3 Z

When the value(s) of the attribute R_3 are asked, a reading demon (attached to the attribute) creates the rule and fires the reasoning process with a backward-chaining strategy. The deduced facts, if any, will not be asserted in the background of the DKB, but in a temporary context.

For instance, the problem of transitivity in meronymic relations (Cruse, 1986; Winston *et al.*, 1987) can be easily expressed by stating the triple (PARTIE-DE

[3] Lexical ambiguity comes from the definitions themselves; syntactical ambiguity is due mainly to the analysis process.

[4] The result of the transitivity rule that will be created will be the deduction of values for the R_3 attribute. The triples are stored in a facet of R_3.

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

PARTIE-DE PARTIE-DE) but not stating, for instance, (PARTIE-DE MEMBRE-DE PARTIE-DE), thus expressing that the transitivity in the second case is not true. Examples of other triples that have been stated in the system are:

- Combination of meronymic and non-meronymic relations:
  (PARTIE-DE LOCATIF LOCATIF)
  (LOCATIF HYPERONYME LOCATIF)
  (MEMBRE-DE HYPERONYME MEMBRE-DE)

- Combination of relations derived from the definition meta-language:
  (CARACTERISTIQUE QUI-A POSSESSION)
  (OBJECTIF CE-QUI OBJECTIF)

Explicit rules of lexical composition can be used when the general form of the triples is not valid. These rules are used following the same reasoning strategy.

In the following is given the rule derived from the last triple and one instance of it. By means of this rule instance, the fact that the purpose of a *géranium* is the action of *orner* is deduced from the definitions of *géranium* and *ornement*:

if X OBJECTIF Y **and** **;;;** the objective of X is Y (entity)
  Y CE-QUI Z ;;; Y 'est ce qui' Z (action)
then X OBJECTIF Z **;;;** the objective of X is Z (action)
if |géranium I 1| OBJECTIF |ornement I 1| **and**
  |ornement I 1| CE-QUI |orner I 1|
then |géranium I 1| OBJECTIF |orner I 1|

7 IDHS prototype: DKB size and content

The prototype obtained after the construction of the DKB contains an important subset of the source dictionary. The quality of the semantic knowledge extracted from the DDB is conditioned by the size of definitions in the dictionary. In our case definitions are short and many of them use no more than one, two or three synonyms.

KB-DICTIONNAIRE contains 2400 entries, each one representing one word. KB-THESAURUS contains 6130 conceptual units; 1738 units of these are phrasal concepts. In this KB there are 1255 ambiguous concepts. Once the initial construction phase was finished, 19,691 relational arcs – interconceptual relationships – had been established. After the enrichment processes, the number of relational links have been incremented up to 21,800 (10.7% more). It has been estimated that, using the mechanism of lexical composition, the number of interconceptual relations could reach an increment of between 5 and 10%.[5]

Manual evaluation of a meaningful sample of 100 concept-relation-concept triples from the enriched KB-THESAURUS gave us a correctness rate of 90% (under a 95% confidence given by the size of the sample).

Concerning the deduction of semantic knowledge, two considerations arise. Firstly, the use of dubious lexical rules, such as the transitivity of synonymy, has led to some

[5] Considering only the set of triples declared until now.

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

errors in the prototype. Secondly, lexical ambiguity restricts deduction, because we make ambiguous concepts stop deduction both in the enrichment process and in lexical composition. Lexical disambiguation is not a trivial issue, and is receiving much attention in recent research. Our group has developed a knowledge-based technique for lexical disambiguation of free-running text (Agirre and Rigau, 1996), which is now being applied to dictionary definitions.

8 Conclusions

A methodology for the extraction of semantic knowledge from a conventional dictionary has been described. This extraction has been founded on a systematic study of dictionary definitions. A parser based on phrasal pattern hierarchies has been implemented and used in that study.

The method followed in the construction of the hierarchies needed by the parser is based on an empirical study on the structure of definition sentences. The results of its application to a real dictionary has shown that the parsing method is particularly suited to the analysis of short definition sentences, as it was the case of the source dictionary.

As a result of this process, the characterization of the different lexical-semantic relations between senses – which is the basis for the proposed DKB representation schema – has been established.

A frame-based knowledge representation model has been described. This model has been used in an Intelligent Dictionary Help System to represent the lexical knowledge acquired automatically from a conventional dictionary.

The characterization of the different interconceptual lexical-semantic relations is the basis for the proposed model and it has been established as a result of the analysis process carried out on dictionary definitions.

Several enrichment processes have been performed on the DKB – after the initial construction – to add new facts to it; these processes are based on the exploitation of the properties of lexical-semantic relations. Moreover, a mechanism for acquiring – in a dynamic way – knowledge not explicitly represented in the DKB is proposed. This mechanism is based on the composition of lexical relations.

The general objective of IDHS is to assist a human user in language comprehension or production tasks. As a particular application, IDHS has been used in the design and implementation of a computerized translation-oriented dictionary that helps human translators choosing suitable target lexical units that correspond with those that are in the source text (Agirre *et al.*, 1996). A new lexical knowledge base was constructed for Basque following the same architecture, and the IDHS functionality was enriched with the treatment of knowledge about the process of lexical translation.

References

Ageno, A., Castellón, I., Martí, M. A., Rigau, G., Ribas, F., Rodriguez, H., Taulé, M. and Verdejo, V. (1992) SEISD: An environment for extraction of Semantic Information from on-line dictionaries, *Proceedings 3rd Conference on Applied Natural Language Processing*, Trento, Italia. Pp. 253–254.

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

Agirre, E., Arregi, X., Artola, X., Díaz de Ilarraza, A., Evrard, F. and Sarasola, K. (1994a) Intelligent Dictionary Help System. *Applications and Implications of Current Language for Special Purposes Research* **I**: 174–183. Bergen.

Agirre, E., Arregi, X., Artola, X., Díaz de Ilarraza, A., Evrard, F. and Sarasola, K. (1994b) Lexical knowledge representation in an Intelligent Dictionary Help System. *Proc. COLING'94* Kyoto, Japan. Pp. 544–550.

Agirre, E., Arregi, X., Artola, X., Díaz de Ilarraza, A., Evrard, F. and Sarasola, K. (1994c) A methodolgy for the extraction of semantic knowledge from dictionaries using phrasal patterns. *Proc. IBERAMIA'94* Caracas, Venezuela. Pp. 263–270.

Agirre, E., Arregi, X., Artola, X., Díaz de Ilarraza, A., Evrard, F. and Sarasola, K. (1995a) IDHS, MLDS: Towards dictionary help systems for human users. In K. Korta and J. M. Larrazabal (eds.), *Semantics and Pragmatics of Natural Language*: *Logical and Computational Aspects* ILCLI Series, no. 1, Donostia, Basque Country. Pp. 167–188.

Agirre, E., Arregi, X., Artola, X., Díaz de Ilarraza, A. and Sarasola, K. (1995b) Lexical-semantic information and automatic correction of spelling errors. In: K. Korta and J. M. Larrazabal (eds.), *Semantics and Pragmatics of Natural Language*: *Logical and Computational Aspects*. ILCLI series no. 1, Donostia, Basque Country. Pp. 157–166.

Agirre E., Arregi, X., Artola, X., Díaz de Ilarraza, A., Patel, H., Sarasola, K. and Soroa, A. (1996) A computerised translation-oriented dictionary. *Proc. NLP+IA/TAL+AI 96* Moncton, Canada.

Agirre, E. and Rigau, G. (1996) Word Sense Disambiguation using Conceptual Density. *Proc. of COLING'96* Copenhagen, Denmark.

Alshawi, H. (1989) Analysing dictionary definitions. In B. Boguraev and T. Briscoe (eds.), *Computational Lexicography for Natural Language Processing*. New York: Longman. Pp. 153–169.

Amsler, R. A. (1981) A. taxonomy for English nouns and verbs. *Proc. 19th Annual Meeting ACL*. Pp. 133–138.

Arango Gaviría, G. (1983) Une approche pour amorcer le processus de compréhension et d'utilisation du sens des mots en langage naturel. *Thèse de 3ème cycle* (Paris VI). Publications du Groupe de Recherche Claude François Picard.

Arregi, X., Artola, X., Díaz de Ilarraza, A., Evrard, F. and Sarasola, K. (1991) Aproximación funcional a DIAC: Diccionario inteligente de ayuda a la comprensión. *Proc. SEPLN* **11**: 127–138.

Arregi, X. (1995) ANHITZ: Itzulpenean laguntzeko Hiztegi-sistema eleanitza / ANHITZ: Multilingual dictionary help system for translation tasks. *Ph.D Thesis* University of the Basque Country UPV-EHU. Donostia.

Artola, X. and Evrard, F. (1992) Dictionnaire intelligent d'aide à la compréhension. *Actas IV Congreso Int. EURALEX'90* Benalmádena. Pp. 45–57. Barcelona: Biblograph.

Artola, X. (1993) HIZTSUA: Hiztegi-sistema urgazle adimendunaren sorkuntza eta eraikuntza / Conception d'un système intelligent d'aide dictionnariale (SIAD). *PhD Thesis* University of the Basque Country UPV-EHU. Donostia.

Boguraev, B. and Briscoe, T. (eds.) (1989) *Computational Lexicography for Natural Language Processing*. New York: Longman.

Byrd, R. J., Calzolari, N., Chodorow, M. S., Klavans, J. L., Neff, M. S. and Rizk, O. A. (1987) Tools and methods for computational lexicography. *Computational Linguistics* **13**(3–4): 219–240.

Calzolari, N. (1984) Machine-readable dictionaries, lexical data bases and the lexical system. *Proc. COLING* Standford, CA. P. 460.

Calzolari, N. and Picchi, E. (1988) Acquisition of semantic information from an on-line dictionary. *Proc. COLING* Budapest, Hungary. Pp. 87–92.

Chodorow, M. S. and Byrd, R. J. (1985) Extracting semantic hierarchies from a large on-line dictionary. *Proc. ACL*. Pp. 299–304.

Chouraqui, E. and Godbert, E. (1989) Représentation des descriptions définies dans un réseau

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press

sémantique. *Actes 7ème Congrès Reconnaissance des Formes et Intelligence Artificielle* (*AFCET-INRIA*) Paris. Pp. 855–868.

Copestake, A. (1990) An approach to building the hierarchical element of a lexical knowledge base from a machine-readable dictionary. *First Int. Workshop on Inheritance in NLP* Tilburg.

Cruse, D. A. (1986) *Lexical Semantics*. Cambridge: Cambridge University Press.

van den Hurk, I. and Meijs, W. (19??) The dictionary as a corpus: analyzing LDOCE's definition-language. *Corpus Linguistics II*. Pp. 99–125.

Litkowsky, K. C. (1978) Models of the semantic structure of dictionaries. *American Journal of Computational Linguistics* **81**: 25–74.

Markowitz, J., Ahlswede, T. and Evens, M. (1986) Semantically significant patterns in dictionary definitions. *Proc. 24th Annual Meeting ACL* New York. Pp. 112–119.

McRoy, S. (1992) Using multiple knowledge sources for word sense discrimination. *Computational Linguistics* **18**(1).

Pazienza, M. T. and Velardi, P. (1987) A structured representation of word-senses for semantic analysis. *Proc. 3rd European Conference ACL* Copenhaguen, Denmark. Pp. 249–257.

Quillian, M. R. (1968) Semantic memory. In M. Minsky (ed.), *Semantic Information Processing*. Cambridge, MA: MIT Press. Pp. 227–270.

Tsurumaru, H., Hitaka, T. and Yoshida, S. (1986) An attempt to automatic thesaurus construction from an ordinary japanese language dictionary. *Proc. COLING* Bonn, Germany. Pp. 445–447.

Vossen, P., Meijs, W. and den Broeder, M. (1989) Meaning and structure in dictionary definitions. In B. Boguraev and T. Briscoe (eds.), *Computational Lexicography for Natural Language Processing*. New York: Longman. Pp. 171–192.

Wilks, Y., Fass, D., Cheng-Ming, G., McDonald, J. E., Plate, T. and Slator, B. M. (1990). Providing machine tractable dictionary tools. *Machine Translation 5*. Pp. 99–154.

Winston, M. E., Chaffin, R. and Herrmann, D. (1987) A taxonomy of part-whole relations. *Cognitive Science 11*. Pp. 417–444.

https://doi.org/10.1017/S1351324997001356 Published online by Cambridge University Press